


GL-CFD06DA-35 Series

Installation of suspension accessory

Thank you for choosing the GL-CFD06DA-35 Series LED products. Please install and use the products according to the following directions to ensure normal function and operation. Please use stainless screw to fix holder and make sure screwed tightly. If you do not follow these instructions to properly install and use the GL-CFD06DA-35, you will not be eligible for warranty compensation or protection. We do not take any responsibility for product damage resulting from improper installation or abnormal usage.

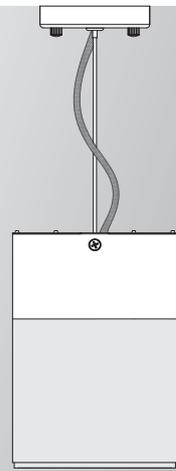

CAUTIONS


1. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
2. Prior to installation, remove the AC power.
3. Do not touch the reflector and LED CoB when during the process of installation.

Installation Steps

The setup process should be executed by qualified(certified) engineers. We suggest to wear the clean gloves during the process of installation.

Step 1.


Remove M5 screws from two sides of the lighting fixture, and separate the lighting fixture from power base.



Make sure to turn off the power before installing.


Step 2.

Disconnected the power connector and unhook the safety steel wire.




Step 3.

Unscrew the two screws of the power base, and move the driver outside the power plate. (Do not remove the cable from the driver)




Step 4.

Assemble the (a.)cable clamps, (b.)washer and (c.)screw nut in the order onto the power plate, and make sure they are locking.

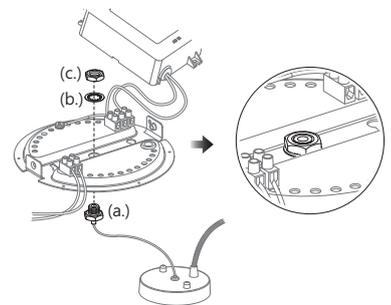


Step 5.

Fix the driver with by replacing the screws in the step 3 on the power plate.




Step 6.

- (1.) Make the AC power cord and dimming cable of the ceiling mount through the grommet on the power base.
- (2.) Connect the AC power cord to the connector on the power base.
- (3.) Connect the dimming cable to the connector on the power base. (If not require dimming function, please ignore this step.)
- (4.) Fasten the screws on the connector.

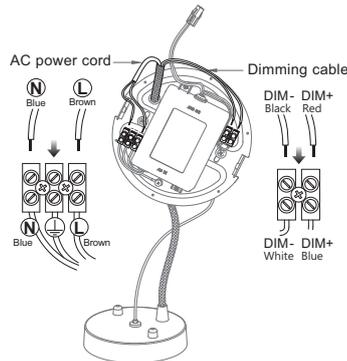


Step 7.

- (1.) Attached the power connector and hook the safety steel wire of the lighting fixture to the power base.
- (2.) Use M5 screws to fix the lighting fixture and the power base.

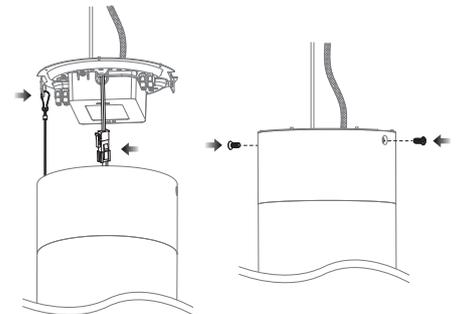


Step 8.

Remove the cap nuts and attach the mounting plate to the ceiling with screws.




Step 9.

Connect the internal power cord to the AC power cord of the ceiling mount.

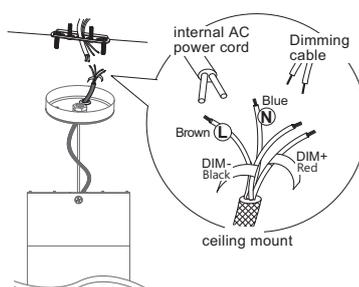

Step 10.

- (1.) Insert the ceiling mount through the screws of the mounting plate, and fasten the cap nuts.
- (2.) Fix the steel wire and cable. Installation completed.




GL-CFD06DA-35 系列 吸頂吊線安裝說明書

感謝您選擇使用GL-CFD06DA-35系列LED燈具。請您依據下列說明指示來安裝本產品以確保本產品的正常運作。請勿增加或刪除任何電子元件，未經許可勿更改或修改電氣設計。如您未按說明指示妥善安裝以及正常使用，您的產品將無法得到正常的保修補償。不正常的安裝與使用所造成的產品損壞，本公司具免責權利。

警告：

1. 如果燈具外部纜線有損壞，應當由製造商、代理商或符合資格的施工人員做更換，以避免危險。
2. 安裝前，請確實關閉交流電源。
3. 安裝過程中不要觸摸反射杯和LED CoB。

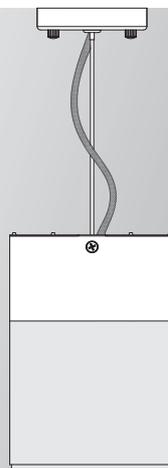


安裝指南

安裝流程應由合格的技術人員進行。建議安裝過程請帶上乾淨手套。

步驟 1.


將燈具兩側M5螺絲取下，分離燈具本體及電源座。



安裝前，請確實關閉電源。


步驟 2.

將電源及本體間連接的電線接頭、安全鋼繩拆開，讓燈具本體與電源座分離。




步驟 3.

取出電源座，將電源上的固定螺絲取下，並將電源移至電源固定盤之外。(無須將電源上的接線移除)




步驟 4.

取出吸頂盤配件-卡線器
將(a.)卡線器、(b.)內齒華司及(c.)螺母依序鎖附在電源固定盤上。(務必確認有鎖緊)

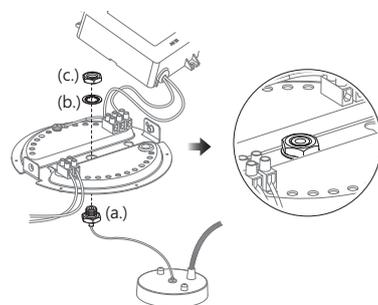


步驟 5.

以步驟三取下的固定螺絲將電源鎖附在電源固定盤上，並將線整理好。




步驟 6.

- (1) 將吸頂盤配件上的電源線(AC線&調光線)穿過護線環至電源座內。
- (2) 將AC線與電源座上的接線座銜接起來。
- (3) 將調光線與電源座上的接線座銜接起來。(如無須調光功能，可省略這個步驟)
- (4) 銜接後將螺絲鎖緊。

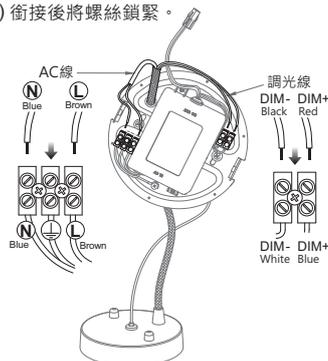


步驟 7.

- (1) 將電源及燈具本體間連接的電線接頭、安全鋼繩連接起來。
- (2) 將燈具本體與電源座合併對準螺絲孔，並以M5螺絲固定。

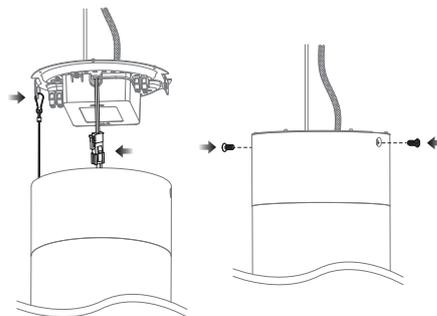


步驟 8.

取下吸頂盤螺帽，並將吸頂掛板鎖在天花板上。



步驟 9.

連接室內電到吸頂盤內的電源線。

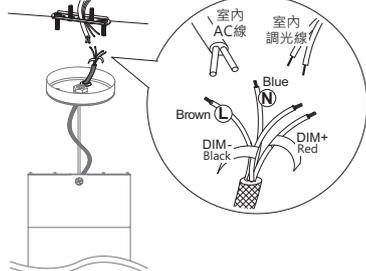

步驟 10.

- (1) 將吸頂盤穿過掛板螺絲，並將螺帽鎖上。
- (2) 將鋼繩及電源線作固定及完成安裝。

