



Features


- Indoor & outdoor use
- High power efficiency > 90%
- LED chips by Philips Lumileds
- Long life span: >30,000 hours
- Ideal replacement for mercury lamps
- Eco-friendly: No UV, no IR, & no mercury



Specifications

Type	GL-FL60-WW	GL-FL60-CW
Energy Used	60 W	
Rated Life	30,000 Hours	
Input Voltage	100-277V AC	
Power Factor (PF)	0.98 at 120V AC, 0.94 at 240V AC	
CCT (color)	3000K	5700K
Luminous Flux	3800 lm	4300 lm
System Efficacy	63 lm/W	72 lm/W
CRI	85	70
Beam Angle	20° / 60°	
Dimension	290x235x150 mm	
IP Rating	IP66	
Operation Temperature	-20°C ~ +40°C	
Net Weight	2.9 kg	
Package	1 Carton	





Outline / Dimension

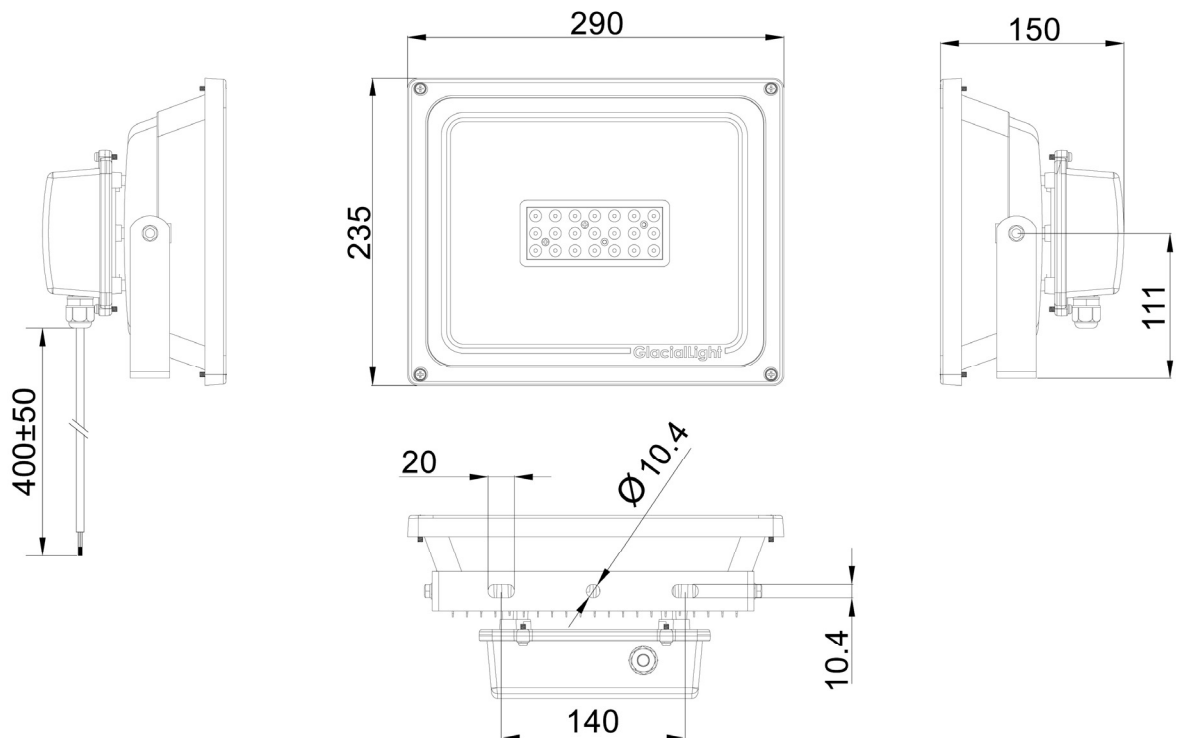


※ UNIT: mm ※ Philips Lumileds LED

Luminous Intensity Distribution Diagram

GL-FL60-WW-20D/ CCT: 3000K

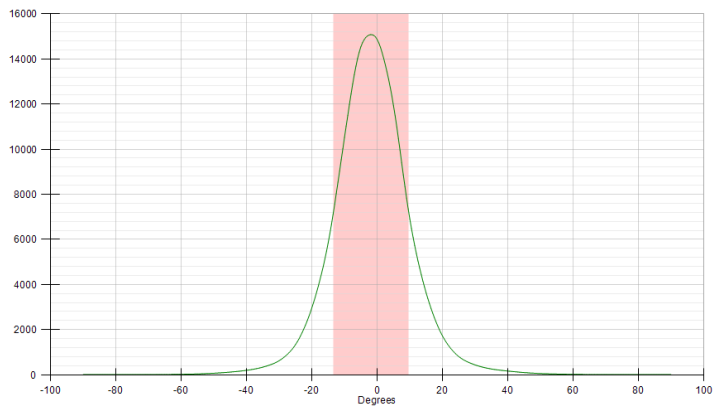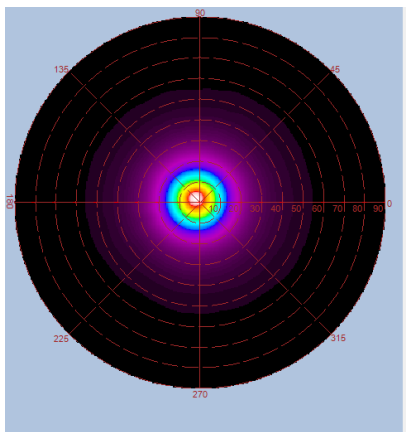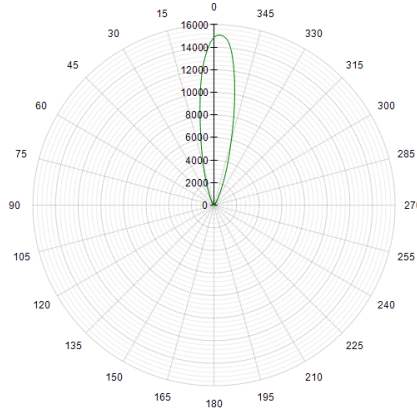
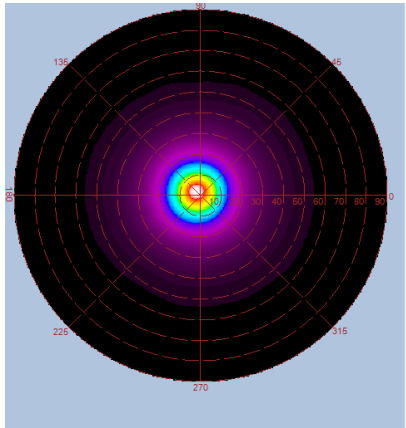


Height	E Max.	Diameter
1.0M	17449 Lx	40 cm
2.0M	4367 Lx	81 cm
3.0M	1935 Lx	122 cm
4.0M	1086 Lx	162 cm
5.0M	693 Lx	203 cm

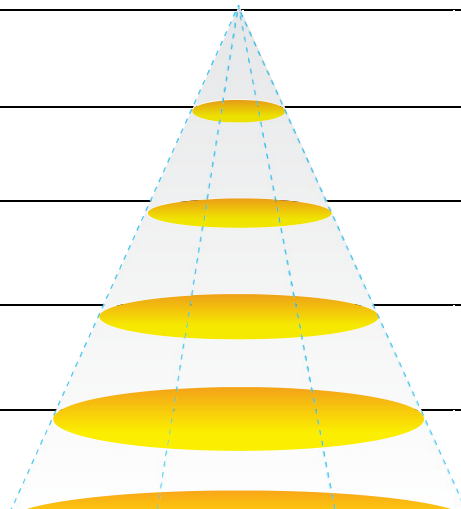


Luminous Intensity Distribution Diagram

GL-FL60-WW-60D/ CCT: 3000K



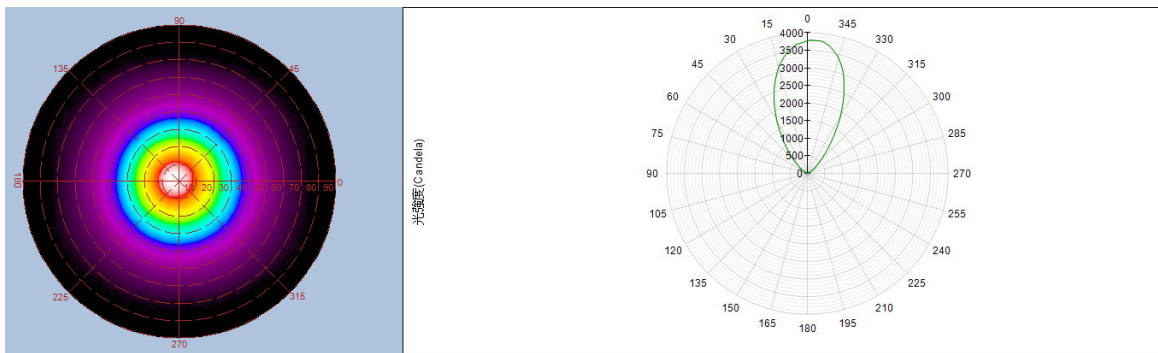
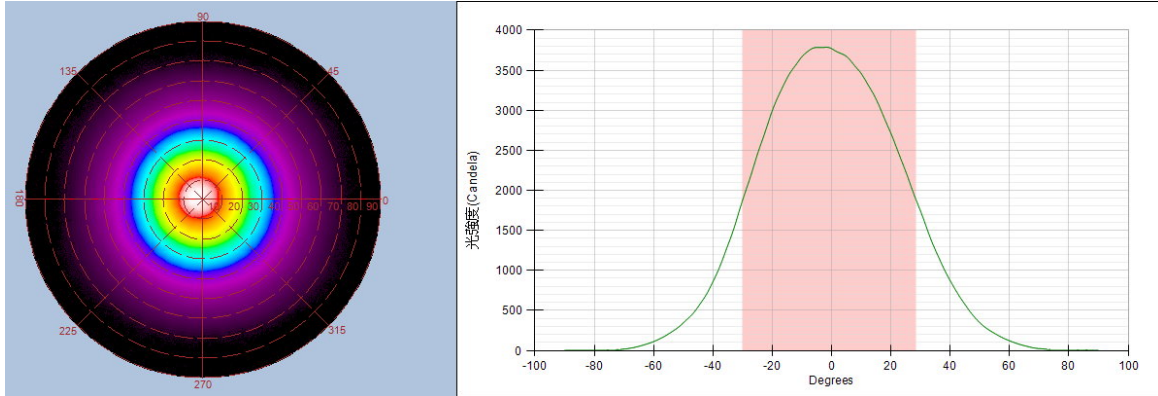


Height	E Max.	Diameter
1.0M	3914 Lx	112 cm
2.0M	979 Lx	224 cm
3.0M	245 Lx	336 cm
4.0M	489 Lx	448 cm
5.0M	157 Lx	560 cm

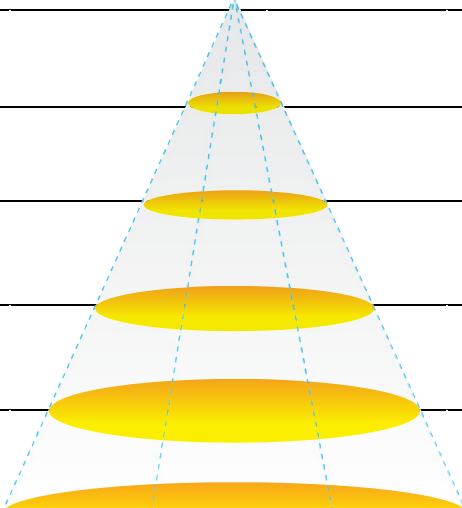


Luminous Intensity Distribution Diagram

GL-FL60-CW-20D/ CCT: 5700K

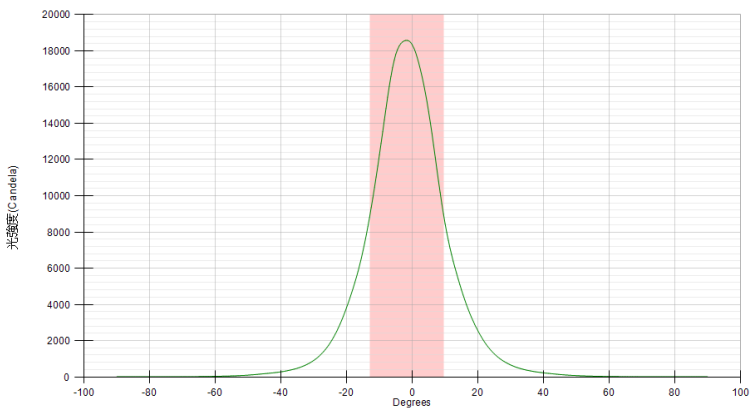
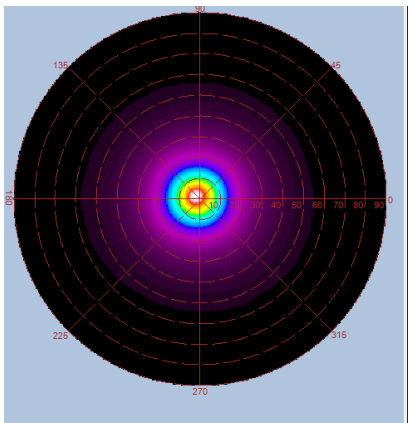
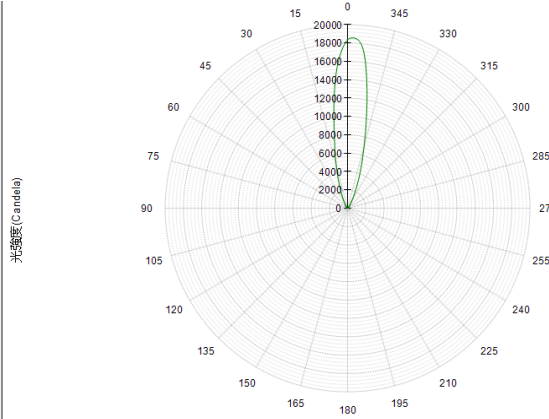
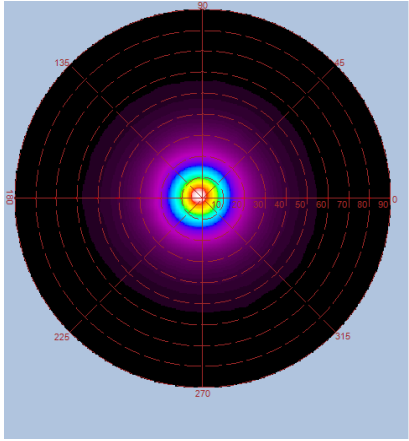


Height	E Max.	Diameter
1.0M	18882 Lx	39 cm
2.0M	4756 Lx	79 cm
3.0M	2126 Lx	119 cm
4.0M	1198 Lx	159 cm
5.0M	762 Lx	198 cm

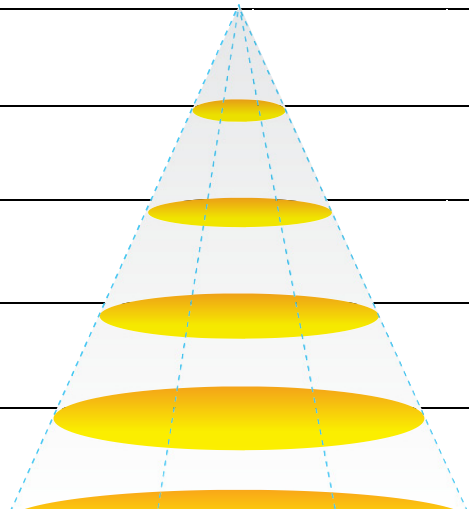

Luminous Intensity Distribution Diagram

GL-FL60-CW-60D/ CCT: 5700K

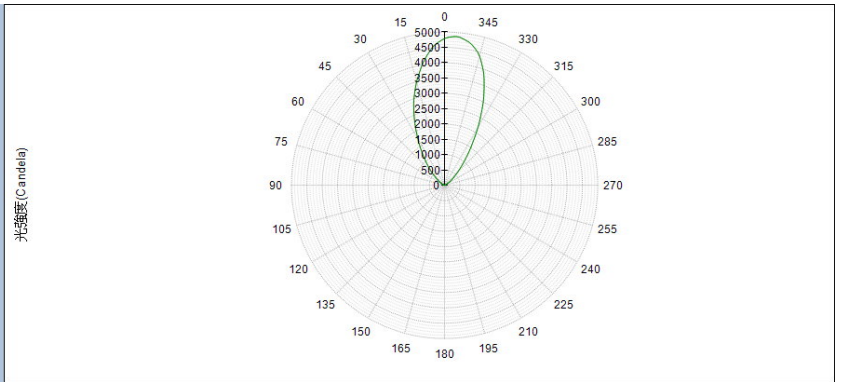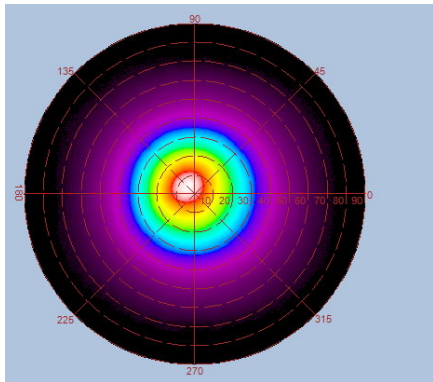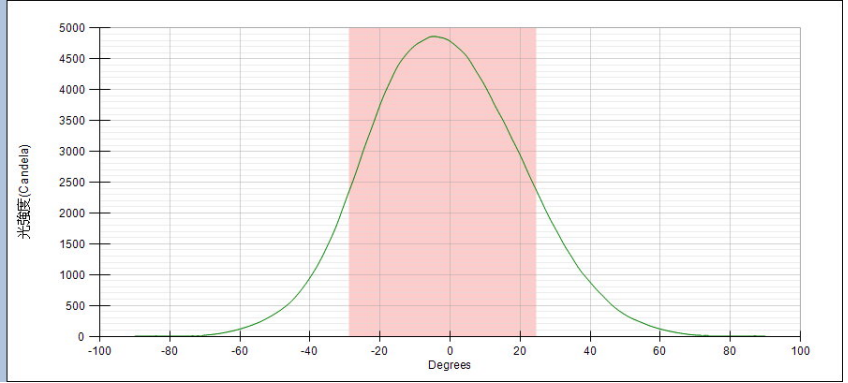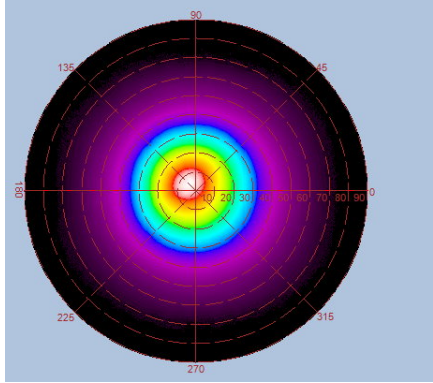

Height	E Max.	Diameter
1.0M	5030 Lx	100 cm
2.0M	1258 Lx	200 cm
3.0M	559 Lx	300 cm
4.0M	314 Lx	400 cm
5.0M	201 Lx	500 cm

