

http://www.glaciallight.com


7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City, Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade / Luminaire Data Sheet

See our luminaire catalog for an image of the luminaire.

Luminous emittance 1:

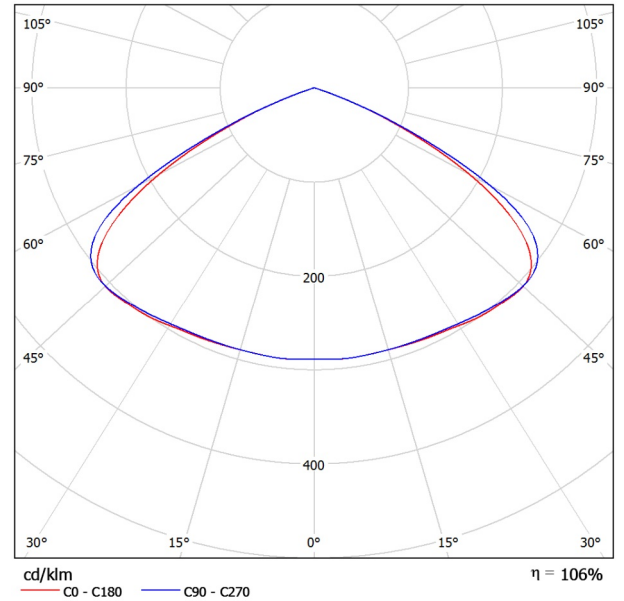

Luminaire classification according to CIE: 100
CIE flux code: 44 87 100 100 106

Luminous emittance 1:

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	26.0	27.4	26.3	27.6	27.8	25.5	26.9	25.8	27.1	27.3
	3H	26.2	27.4	26.6	27.7	28.0	25.7	26.9	26.0	27.1	27.4
	4H	26.2	27.3	26.5	27.6	27.9	25.6	26.7	25.9	27.0	27.3
	6H	26.1	27.1	26.5	27.4	27.7	25.5	26.5	25.9	26.8	27.1
	8H	26.1	27.0	26.4	27.3	27.7	25.5	26.4	25.8	26.8	27.1
	12H	26.0	27.0	26.4	27.3	27.6	25.4	26.4	25.8	26.7	27.0
4H	2H	26.3	27.5	26.7	27.7	28.0	25.9	27.0	26.3	27.3	27.6
	3H	26.6	27.5	27.0	27.9	28.2	26.1	27.0	26.5	27.3	27.7
	4H	26.5	27.4	26.9	27.7	28.1	26.0	26.8	26.4	27.2	27.6
	6H	26.5	27.2	26.9	27.6	28.0	26.0	26.7	26.4	27.0	27.4
	8H	26.4	27.1	26.9	27.5	27.9	25.9	26.6	26.4	27.0	27.4
	12H	26.4	27.0	26.9	27.4	27.8	25.9	26.5	26.3	26.9	27.3
8H	4H	26.5	27.1	26.9	27.5	27.9	26.0	26.6	26.4	27.0	27.4
	6H	26.4	26.9	26.9	27.3	27.8	25.9	26.4	26.3	26.8	27.3
	8H	26.4	26.8	26.8	27.3	27.7	25.8	26.3	26.3	26.8	27.2
	12H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
12H	4H	26.4	27.0	26.9	27.4	27.9	25.9	26.5	26.4	26.9	27.3
	6H	26.4	26.8	26.8	27.3	27.7	25.8	26.3	26.3	26.8	27.2
	8H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
	12H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.2 / -0.2					+0.1 / -0.1					
S = 1.5H	+1.1 / -1.4					+1.1 / -1.7					
S = 2.0H	+2.5 / -5.1					+2.3 / -7.1					
Standard table	BK01					BK01					
Correction Summand	8.8					8.2					
Corrected Glare Indices referring to 10700lm Total Luminous Flux											


<http://www.glaciallight.com>

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,
Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade / LDC (Polar)

Luminaire: GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade
Lamps: 1 x Bay Light

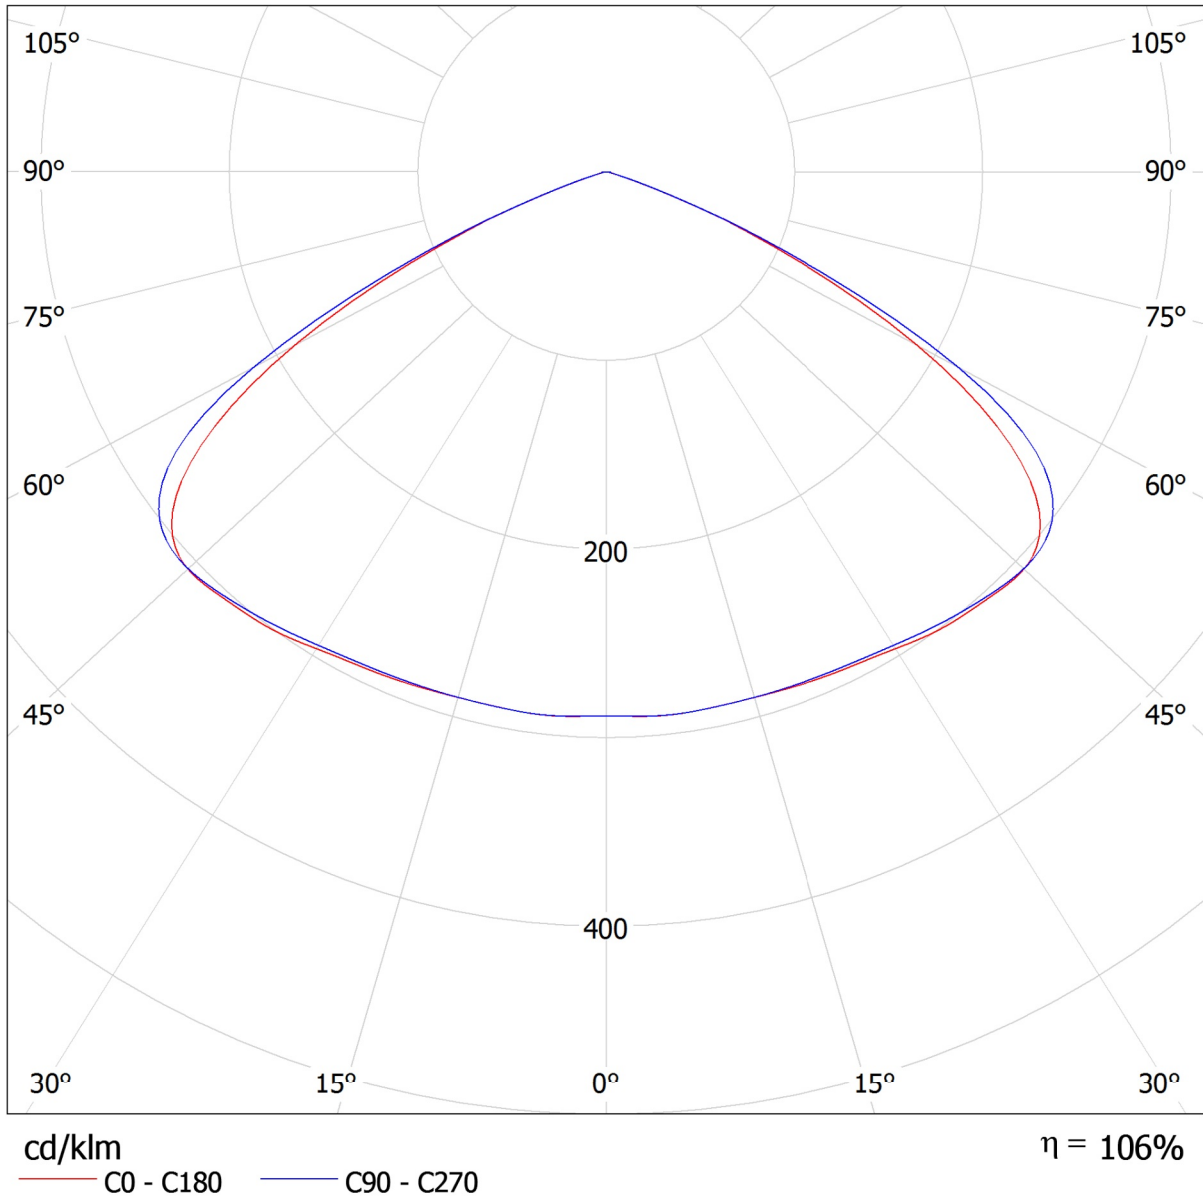


<http://www.glaciallight.com>

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,
Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade / LDC (Linear)

Luminaire: GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade
Lamps: 1 x Bay Light

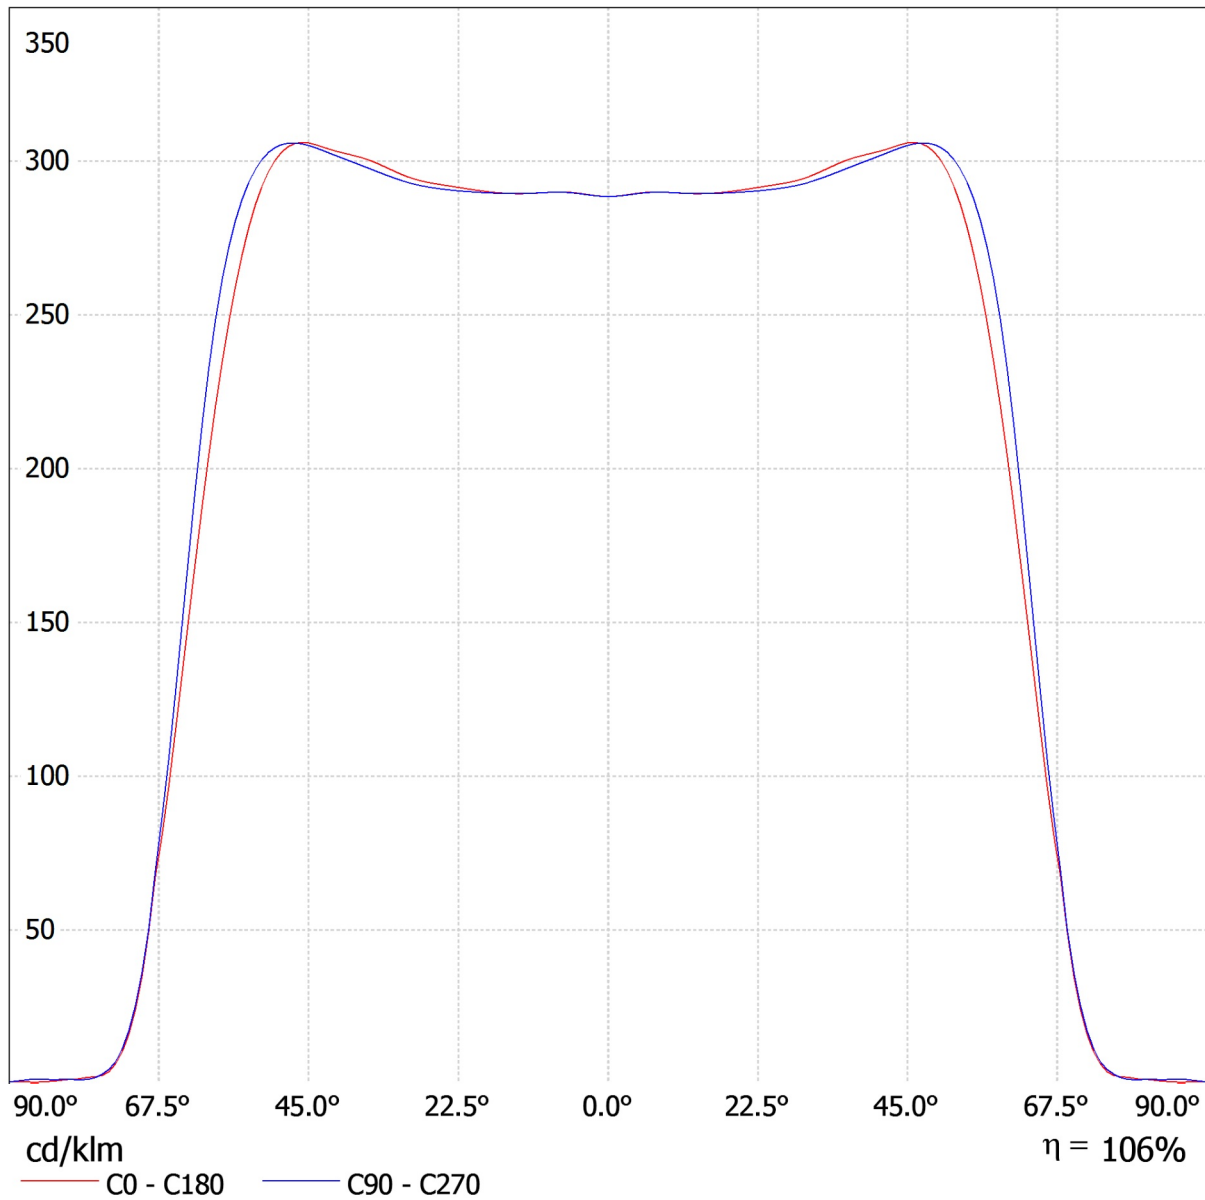

http://www.glaciallight.com

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,
Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade / UGR-Table

Luminaire: GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade
Lamps: 1 x Bay Light

Glare Evaluation According to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	26.0	27.4	26.3	27.6	27.8	25.5	26.9	25.8	27.1	27.3
	3H	26.2	27.4	26.6	27.7	28.0	25.7	26.9	26.0	27.1	27.4
	4H	26.2	27.3	26.5	27.6	27.9	25.6	26.7	25.9	27.0	27.3
	6H	26.1	27.1	26.5	27.4	27.7	25.5	26.5	25.9	26.8	27.1
	8H	26.1	27.0	26.4	27.3	27.7	25.5	26.4	25.8	26.8	27.1
	12H	26.0	27.0	26.4	27.3	27.6	25.4	26.4	25.8	26.7	27.0
4H	2H	26.3	27.5	26.7	27.7	28.0	25.9	27.0	26.3	27.3	27.6
	3H	26.6	27.5	27.0	27.9	28.2	26.1	27.0	26.5	27.3	27.7
	4H	26.5	27.4	26.9	27.7	28.1	26.0	26.8	26.4	27.2	27.6
	6H	26.5	27.2	26.9	27.6	28.0	26.0	26.7	26.4	27.0	27.4
	8H	26.4	27.1	26.9	27.5	27.9	25.9	26.6	26.4	27.0	27.4
	12H	26.4	27.0	26.9	27.4	27.8	25.9	26.5	26.3	26.9	27.3
8H	4H	26.5	27.1	26.9	27.5	27.9	26.0	26.6	26.4	27.0	27.4
	6H	26.4	26.9	26.9	27.3	27.8	25.9	26.4	26.3	26.8	27.3
	8H	26.4	26.8	26.8	27.3	27.7	25.8	26.3	26.3	26.8	27.2
	12H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
12H	4H	26.4	27.0	26.9	27.4	27.9	25.9	26.5	26.4	26.9	27.3
	6H	26.4	26.8	26.8	27.3	27.7	25.8	26.3	26.3	26.8	27.2
	8H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.2 / -0.2					+0.1 / -0.1				
S = 1.5H		+1.1 / -1.4					+1.1 / -1.7				
S = 2.0H		+2.5 / -5.1					+2.3 / -7.1				
Standard table		BK01					BK01				
Correction Summand		8.8					8.2				
Corrected Glare Indices referring to 10700lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

http://www.glaciallight.com

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City, Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade / Glare Data Sheet

Luminaire: GlacialLight GL-FL100-NW-4000K-120D-Lens-with lampshade

Lamps: 1 x Bay Light

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	26.0	27.4	26.3	27.6	27.8	25.5	26.9	25.8	27.1	27.3
	3H	26.2	27.4	26.6	27.7	28.0	25.7	26.9	26.0	27.1	27.4
	4H	26.2	27.3	26.5	27.6	27.9	25.6	26.7	25.9	27.0	27.3
	6H	26.1	27.1	26.5	27.4	27.7	25.5	26.5	25.9	26.8	27.1
	8H	26.1	27.0	26.4	27.3	27.7	25.5	26.4	25.8	26.8	27.1
4H	12H	26.0	27.0	26.4	27.3	27.6	25.4	26.4	25.8	26.7	27.0
	2H	26.3	27.5	26.7	27.7	28.0	25.9	27.0	26.3	27.3	27.6
	3H	26.6	27.5	27.0	27.9	28.2	26.1	27.0	26.5	27.3	27.7
	4H	26.5	27.4	26.9	27.7	28.1	26.0	26.8	26.4	27.2	27.6
	6H	26.5	27.2	26.9	27.6	28.0	26.0	26.7	26.4	27.0	27.4
8H	8H	26.4	27.1	26.9	27.5	27.9	25.9	26.6	26.4	27.0	27.4
	12H	26.4	27.0	26.9	27.4	27.8	25.9	26.5	26.3	26.9	27.3
	4H	26.5	27.1	26.9	27.5	27.9	26.0	26.6	26.4	27.0	27.4
	6H	26.4	26.9	26.9	27.3	27.8	25.9	26.4	26.3	26.8	27.3
	8H	26.4	26.8	26.8	27.3	27.7	25.8	26.3	26.3	26.8	27.2
12H	12H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
	4H	26.4	27.0	26.9	27.4	27.9	25.9	26.5	26.4	26.9	27.3
	6H	26.4	26.8	26.8	27.3	27.7	25.8	26.3	26.3	26.8	27.2
	8H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
	8H	26.3	26.7	26.8	27.2	27.7	25.8	26.2	26.3	26.7	27.2
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.2 / -0.2					+0.1 / -0.1					
S = 1.5H	+1.1 / -1.4					+1.1 / -1.7					
S = 2.0H	+2.5 / -5.1					+2.3 / -7.1					
Standard table	BK01					BK01					
Correction Summand	8.8					8.2					
Corrected Glare Indices referring to 10700lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

