


GlacialTech Inc.
http://www.glaciallight.com
7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei
City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department
Telephone +886 2 2244-1227
Fax +886 2 2244-1228
e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight) / Luminaire Data Sheet

Luminous emittance 1:

See our luminaire catalog for an image of the luminaire.

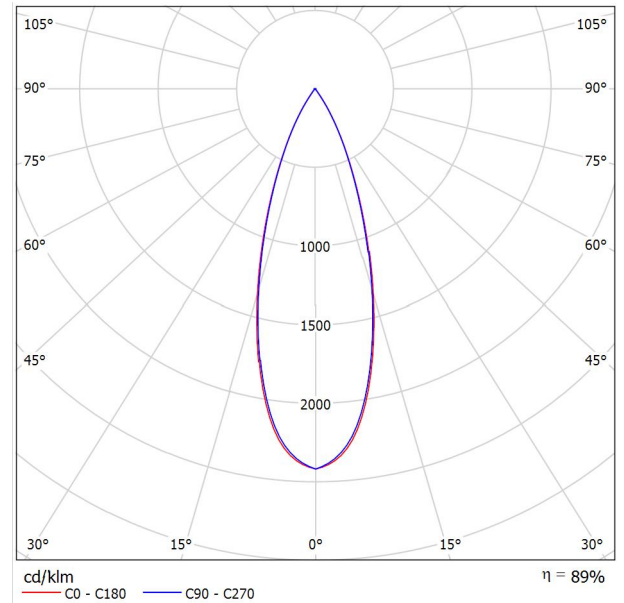

Luminaire classification according to CIE: 100
CIE flux code: 98 99 99 100 89

Luminous emittance 1:


Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	8.3	8.9	8.5	9.1	9.3	8.5	9.1	8.7	9.3	9.5
	3H	8.4	9.0	8.6	9.2	9.4	8.5	9.1	8.8	9.4	9.6
	4H	8.5	9.1	8.8	9.3	9.6	8.6	9.2	8.9	9.4	9.7
	6H	8.7	9.2	9.0	9.5	9.8	8.6	9.2	9.0	9.4	9.7
	8H	8.8	9.3	9.1	9.6	9.9	8.6	9.2	9.0	9.4	9.7
4H	2H	8.1	8.7	8.4	9.0	9.2	8.3	8.9	8.6	9.2	9.4
	3H	8.3	8.8	8.7	9.1	9.4	8.5	8.9	8.8	9.2	9.5
	4H	8.6	9.0	8.9	9.3	9.7	8.6	9.0	9.0	9.4	9.7
	6H	9.0	9.4	9.4	9.7	10.1	8.8	9.1	9.2	9.5	9.9
	8H	9.3	9.6	9.7	9.9	10.3	8.9	9.2	9.3	9.6	10.0
8H	2H	8.6	8.9	9.1	9.3	9.7	8.7	9.0	9.1	9.3	9.7
	3H	8.6	8.9	9.1	9.3	9.7	8.7	9.0	9.1	9.3	9.7
	4H	8.6	8.9	9.1	9.3	9.7	8.7	9.0	9.1	9.3	9.7
	6H	8.6	8.9	9.1	9.3	9.7	8.7	9.0	9.1	9.3	9.7
	8H	8.6	8.9	9.1	9.3	9.7	8.7	9.0	9.1	9.3	9.7
12H	4H	8.6	8.9	9.1	9.3	9.7	8.7	8.9	9.1	9.3	9.8
	6H	8.6	8.9	9.1	9.3	9.7	8.7	8.9	9.1	9.3	9.8
	8H	8.6	8.9	9.1	9.3	9.7	8.7	8.9	9.1	9.3	9.8
	12H	8.6	8.9	9.1	9.3	9.7	8.7	8.9	9.1	9.3	9.8
	8H	8.6	8.9	9.1	9.3	9.7	8.7	8.9	9.1	9.3	9.8
Variation of the observer position for the luminaire distances S											
S = 1.0H	+4.5 / -2.0					+5.2 / -3.1					
S = 1.5H	+7.0 / -2.4					+7.9 / -3.2					
S = 2.0H	+9.0 / -2.5					+9.9 / -3.7					
Standard table	BK03					BK02					
Correction											
Summand	-8.7					-9.2					
Corrected Glare Indices referring to 2500lm Total Luminous Flux											

GlacialTech Inc.
<http://www.glaciallight.com>
7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei
City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department
Telephone +886 2 2244-1227
Fax +886 2 2244-1228
e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight) / LDC (Polar)

Luminaire: GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight)
Lamps: 1 x Track Spot Light

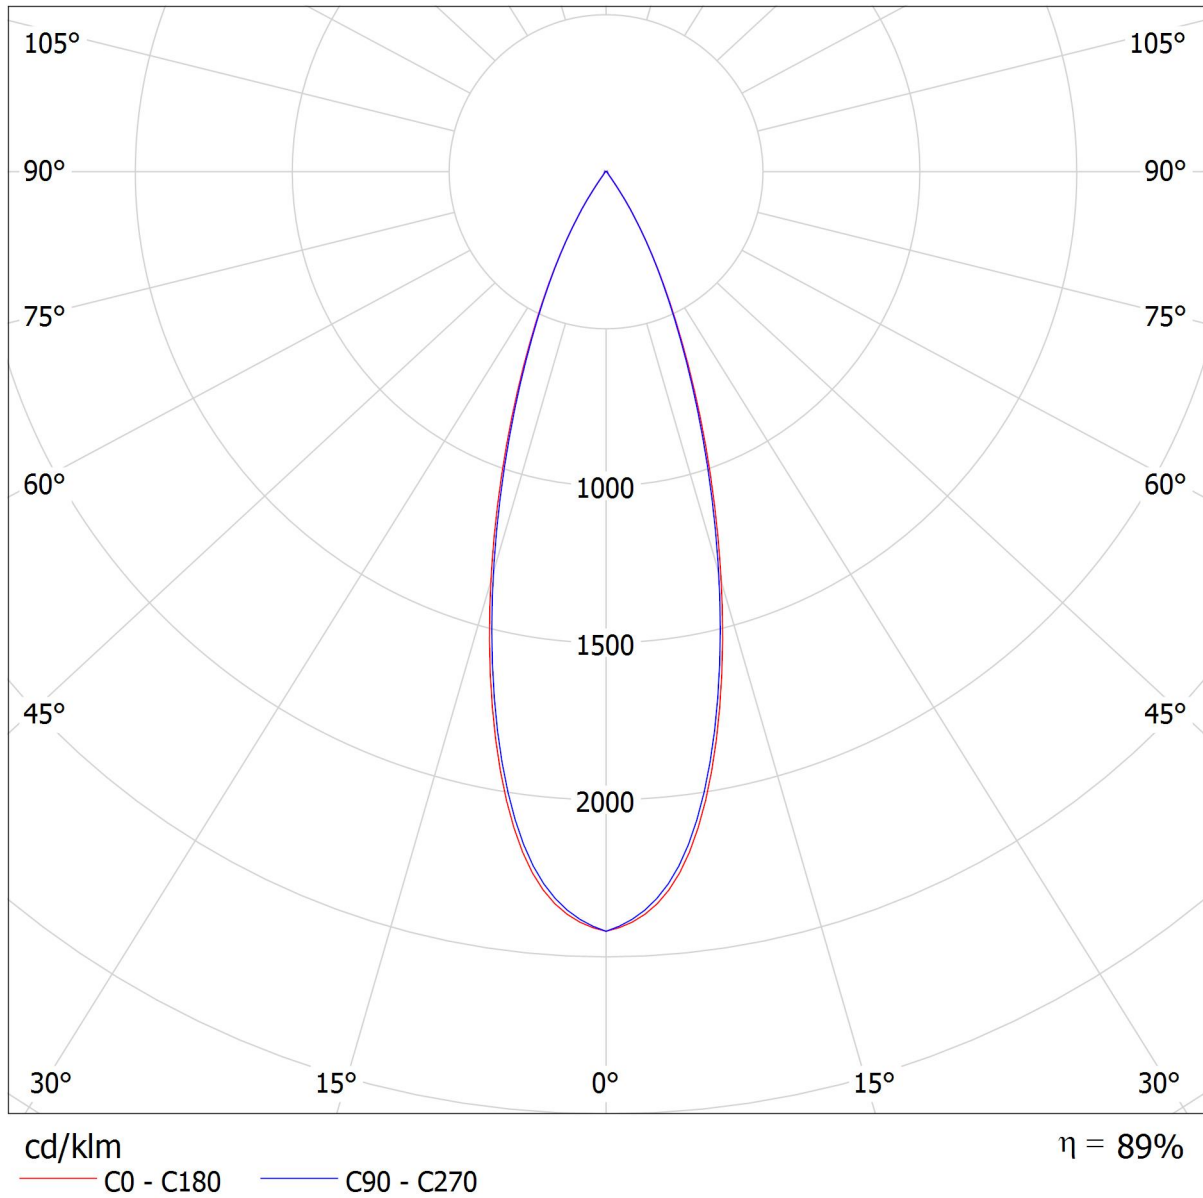


GlacialTech Inc.
<http://www.glaciallight.com>
7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei
City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department
Telephone +886 2 2244-1227
Fax +886 2 2244-1228
e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight) / LDC (Linear)

Luminaire: GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight)
Lamps: 1 x Track Spot Light

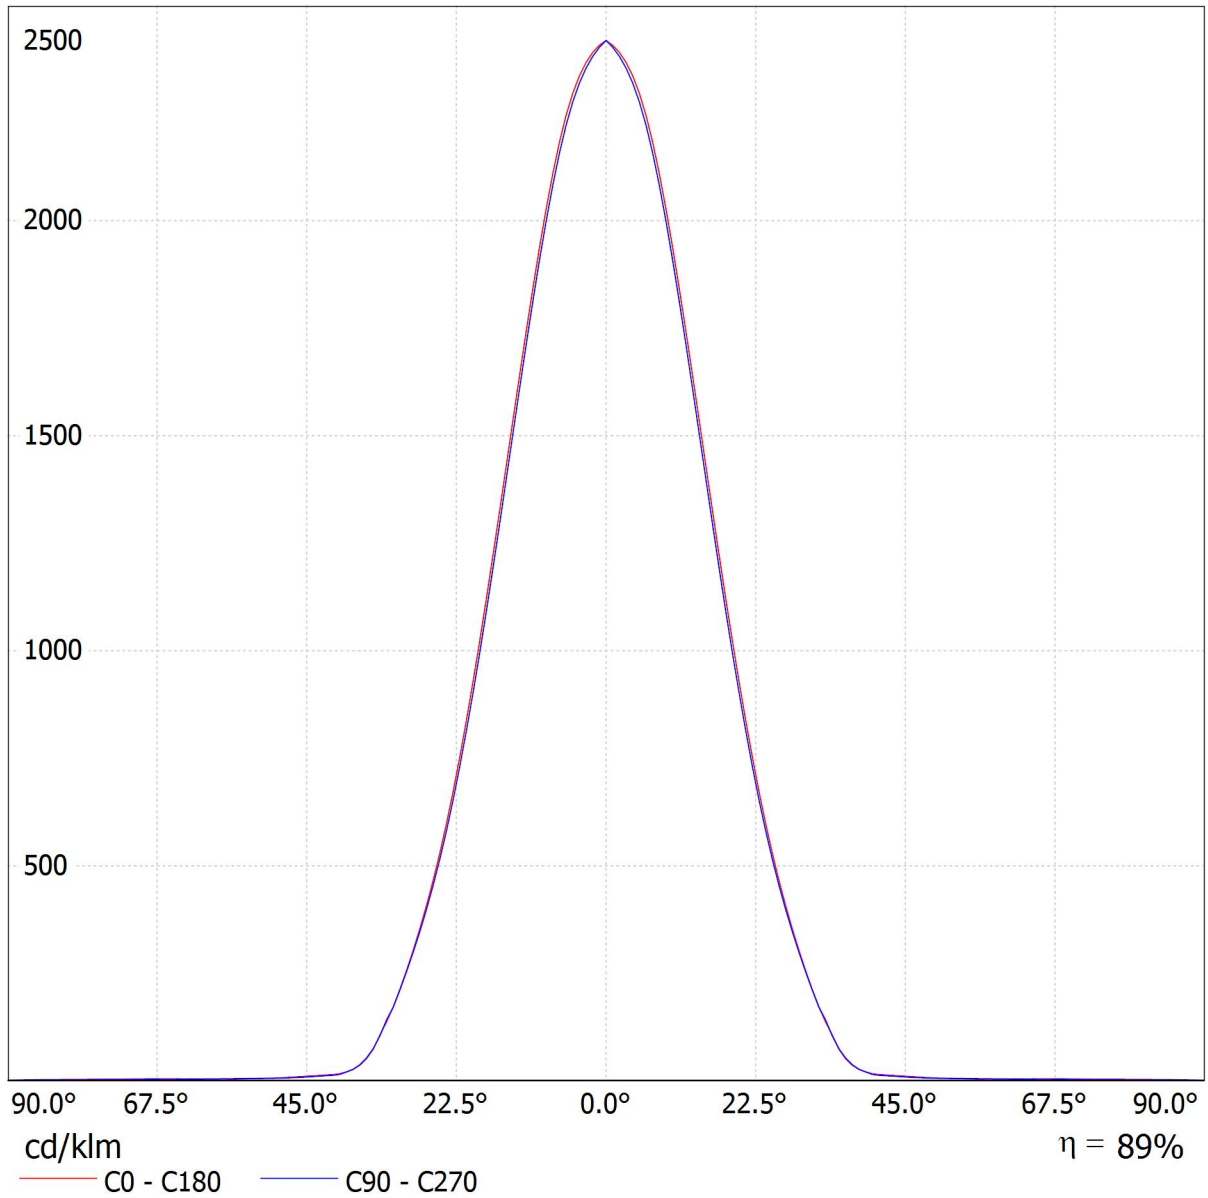

GlacialTech Inc.
<http://www.glaciallight.com>
 7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei
 City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department
 Telephone +886 2 2244-1227
 Fax +886 2 2244-1228
 e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight) / UGR-Table

Luminaire: GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight)
 Lamps: 1 x Track Spot Light

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	8.3	8.9	8.5	9.1	9.3	8.5	9.1	8.7	9.3	9.5
	3H	8.4	9.0	8.6	9.2	9.4	8.5	9.1	8.8	9.4	9.6
	4H	8.5	9.1	8.8	9.3	9.6	8.6	9.2	8.9	9.4	9.7
	6H	8.7	9.2	9.0	9.5	9.8	8.6	9.2	9.0	9.4	9.7
	8H	8.8	9.3	9.1	9.6	9.9	8.6	9.2	9.0	9.4	9.7
4H	12H	8.9	9.3	9.2	9.6	10.0	8.7	9.1	9.0	9.4	9.8
	2H	8.1	8.7	8.4	9.0	9.2	8.3	8.9	8.6	9.2	9.4
	3H	8.3	8.8	8.7	9.1	9.4	8.5	8.9	8.8	9.2	9.5
	4H	8.6	9.0	8.9	9.3	9.7	8.6	9.0	9.0	9.4	9.7
	6H	9.0	9.4	9.4	9.7	10.1	8.8	9.1	9.2	9.5	9.9
8H	8H	9.3	9.6	9.7	9.9	10.3	8.9	9.2	9.3	9.6	10.0
	12H	9.4	9.7	9.9	10.1	10.5	8.9	9.2	9.4	9.6	10.0
	4H	8.6	8.9	9.1	9.3	9.7	8.7	9.0	9.1	9.3	9.7
	6H	9.3	9.5	9.7	9.9	10.4	8.9	9.2	9.4	9.6	10.0
	8H	9.7	9.9	10.1	10.3	10.8	9.1	9.3	9.6	9.8	10.2
12H	12H	10.0	10.2	10.5	10.6	11.1	9.3	9.5	9.8	9.9	10.4
	4H	8.6	8.9	9.1	9.3	9.7	8.7	8.9	9.1	9.3	9.8
	6H	9.3	9.5	9.8	10.0	10.4	9.0	9.2	9.5	9.6	10.1
	8H	9.8	9.9	10.3	10.4	10.9	9.2	9.4	9.7	9.9	10.4
Variation of the observer position for the luminaire distances S											
S = 1.0H	+4.5 / -2.0					+5.2 / -3.1					
S = 1.5H	+7.0 / -2.4					+7.9 / -3.2					
S = 2.0H	+9.0 / -2.5					+9.9 / -3.7					
Standard table	BK03					BK02					
Correction Summand	-8.7					-9.2					
Corrected Glare Indices referring to 2500lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

GlacialTech Inc.
<http://www.glaciallight.com>
 7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei
 City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department
 Telephone +886 2 2244-1227
 Fax +886 2 2244-1228
 e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight) / LDC Data Sheet

Luminaire: GlacialLight GL-TSL30-NL-CW-5000K-(Reflector)38D-(Natural Sunlight)

Lamps: 1 x Track Spot Light

