



Great One Global Certification Co., Ltd.

9F-2, No. 120, Qiaohe Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Website : www.go-safety.com.tw

TEL : +886-2-2248-0810

E-mail : sales@go-safety.com.tw

FAX : +886-2-2248-0811

Optical Report For Luminaires

Applicant..... : GlacialTech Inc.

Applicant Add : 6Fl., No. 346, Sec. 2, Jung Shan Rd., Jung He Dist., New Taipei
City 235, Taiwan (R.O.C.)

Report No..... : GO1605260301E

Product Name..... : LED Feature Lighting

Model No : GL-CFD06XYZ-35

Sample No..... : 16052603-1

Test Specification..... : IESNA LM-79-08, Approved Method: Electrical and Photometric
Measurements of Solid-State Lighting Products.

Test Date : July 4, 2016 to July 5, 2016

Issue Date..... : July 6, 2016

Note: 1. The test results of this report relate only to the tested sample identified in this
report.

2. This report shall not be reproduced, in full or in portion, except for having
written approval from Great One Global Certification Co. , Ltd.

3. The data in report cannot be used for advertisement, publication and promotion.

Tested By :

Reviewed By :

Johnson Wang

Donald Chang

Project Engineer

Team Leader

Spectrum Test Report

Sample : GL-CFD06XYZ-35
Specification : Feature Lighting
Sample No. : 16052603-1
Manufacturer : GlacialTech Inc.


Date : 2016-07-05
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Alex Sung

Test Condition

Temperature : 25.5Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 60.0%
IP : 49590 (76%)
T : 505 ms
Delicacy : High

Spectrum

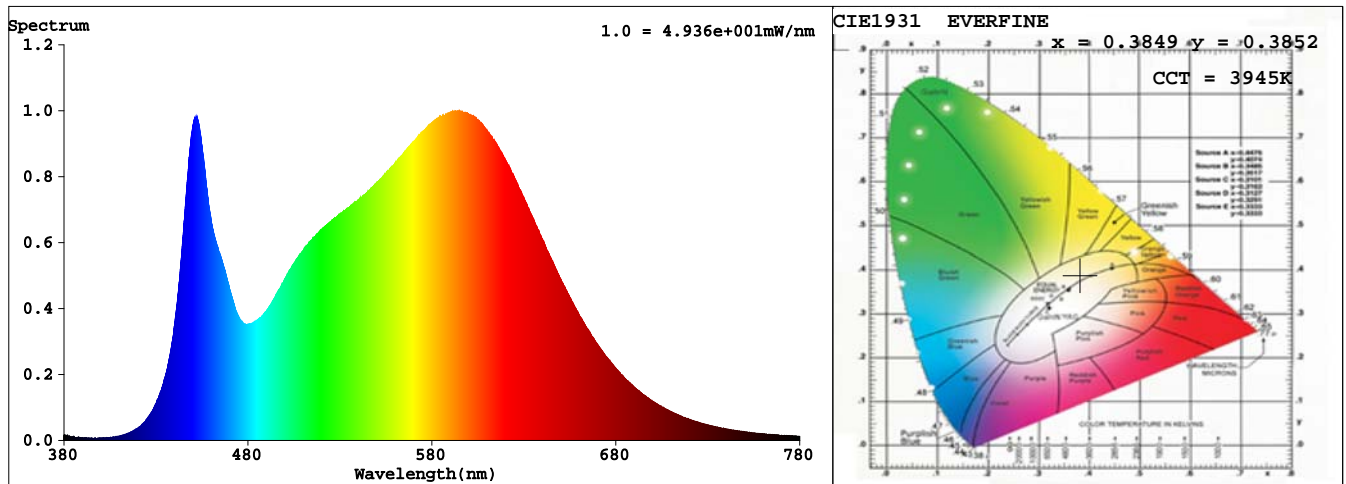

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Quantities

Chromaticity Coordinate: $x = 0.3849$ $y = 0.3852$ / $u' = 0.2247$ $v' = 0.5059$ ($duv=2.63e-03$)

CCT= 3945K Prcp WL: $L_d=578.0nm$ Purity=31.1%

Peak WL: $L_p=595nm$ FWHM: $=147.9nm$ Ratio:R=18.3% G=77.9% B=3.8%

Render Index: $R_a = 82.6$

R1 =80 R2 =90 R3 =96 R4 =80 R5 =81 R6 =87 R7 =85

R8 =62 R9 =3 R10=77 R11=79 R12=63 R13=83 R14=98 R15=73

LEVEL:OUT WHITE:ANSI_4000K

Zonal flux distribution table

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(lm)	Eff Sum(lm)
0.0	6841.057	.000	.000	.000%	.000%
5.0	6686.664	161.720	161.720	5.063%	5.063%
10.0	5535.036	437.209	598.929	13.688%	18.751%
15.0	4242.950	580.023	1178.952	18.159%	36.911%
20.0	3227.334	615.656	1794.609	19.275%	56.186%
25.0	2121.347	560.978	2355.586	17.563%	73.749%
30.0	1132.224	411.742	2767.329	12.891%	86.640%
35.0	603.438	255.588	3022.917	8.002%	94.642%
40.0	116.248	120.074	3142.991	3.759%	98.401%
45.0	26.817	26.490	3169.481	.829%	99.230%
50.0	6.236	6.679	3176.160	.209%	99.440%
55.0	3.149	2.040	3178.200	.064%	99.503%
60.0	2.196	1.235	3179.436	.039%	99.542%
65.0	1.707	.949	3180.384	.030%	99.572%
70.0	1.517	.816	3181.200	.026%	99.597%
75.0	1.327	.743	3181.944	.023%	99.621%
80.0	1.319	.708	3182.652	.022%	99.643%
85.0	1.200	.684	3183.336	.021%	99.664%
90.0	1.217	.662	3183.998	.021%	99.685%
95.0	1.186	.658	3184.656	.021%	99.706%
100.0	1.226	.655	3185.312	.021%	99.726%
105.0	1.177	.643	3185.955	.020%	99.746%
110.0	1.191	.619	3186.573	.019%	99.766%
115.0	1.213	.609	3187.182	.019%	99.785%
120.0	1.208	.589	3187.771	.018%	99.803%
125.0	1.301	.580	3188.351	.018%	99.821%
130.0	1.420	.592	3188.942	.019%	99.840%
135.0	1.588	.608	3189.550	.019%	99.859%
140.0	1.808	.629	3190.179	.020%	99.878%
145.0	2.108	.653	3190.832	.020%	99.899%
150.0	2.483	.676	3191.508	.021%	99.920%
155.0	2.800	.669	3192.177	.021%	99.941%
160.0	3.069	.616	3192.792	.019%	99.960%
165.0	3.294	.524	3193.317	.016%	99.977%
170.0	3.484	.402	3193.719	.013%	99.989%
175.0	3.585	.253	3193.972	.008%	99.997%
180.0	3.687	.087	3194.059	.003%	100.000%


Zonal flux distribution table

ZONAL LUMEN SUMMARY			
Zone	Lumens	%Lamp	%Fixt
0-30	2767.3	86.6%	86.6%
0-40	3143.0	98.4%	98.4%
0-60	3179.4	99.5%	99.5%
0-90	3184.0	99.7%	99.7%
90-120	3.8	0.1%	0.1%
90-130	4.9	0.2%	0.2%
90-150	7.5	0.2%	0.2%
90-180	10.0	0.3%	0.3%
0-180	3194.1	100.0%	100.0%

ZONAL LUMEN SUMMARY

0-10	598.9
10-20	1195.7
20-30	972.7
30-40	375.7
40-50	33.2
50-60	3.3
60-70	1.8
70-80	1.5
80-90	1.3
90-100	1.3
100-110	1.3
110-120	1.2
120-130	1.2
130-140	1.2
140-150	1.3
150-160	1.3
160-170	0.9
170-180	0.3

Light Distribution Curve [Unit: cd]

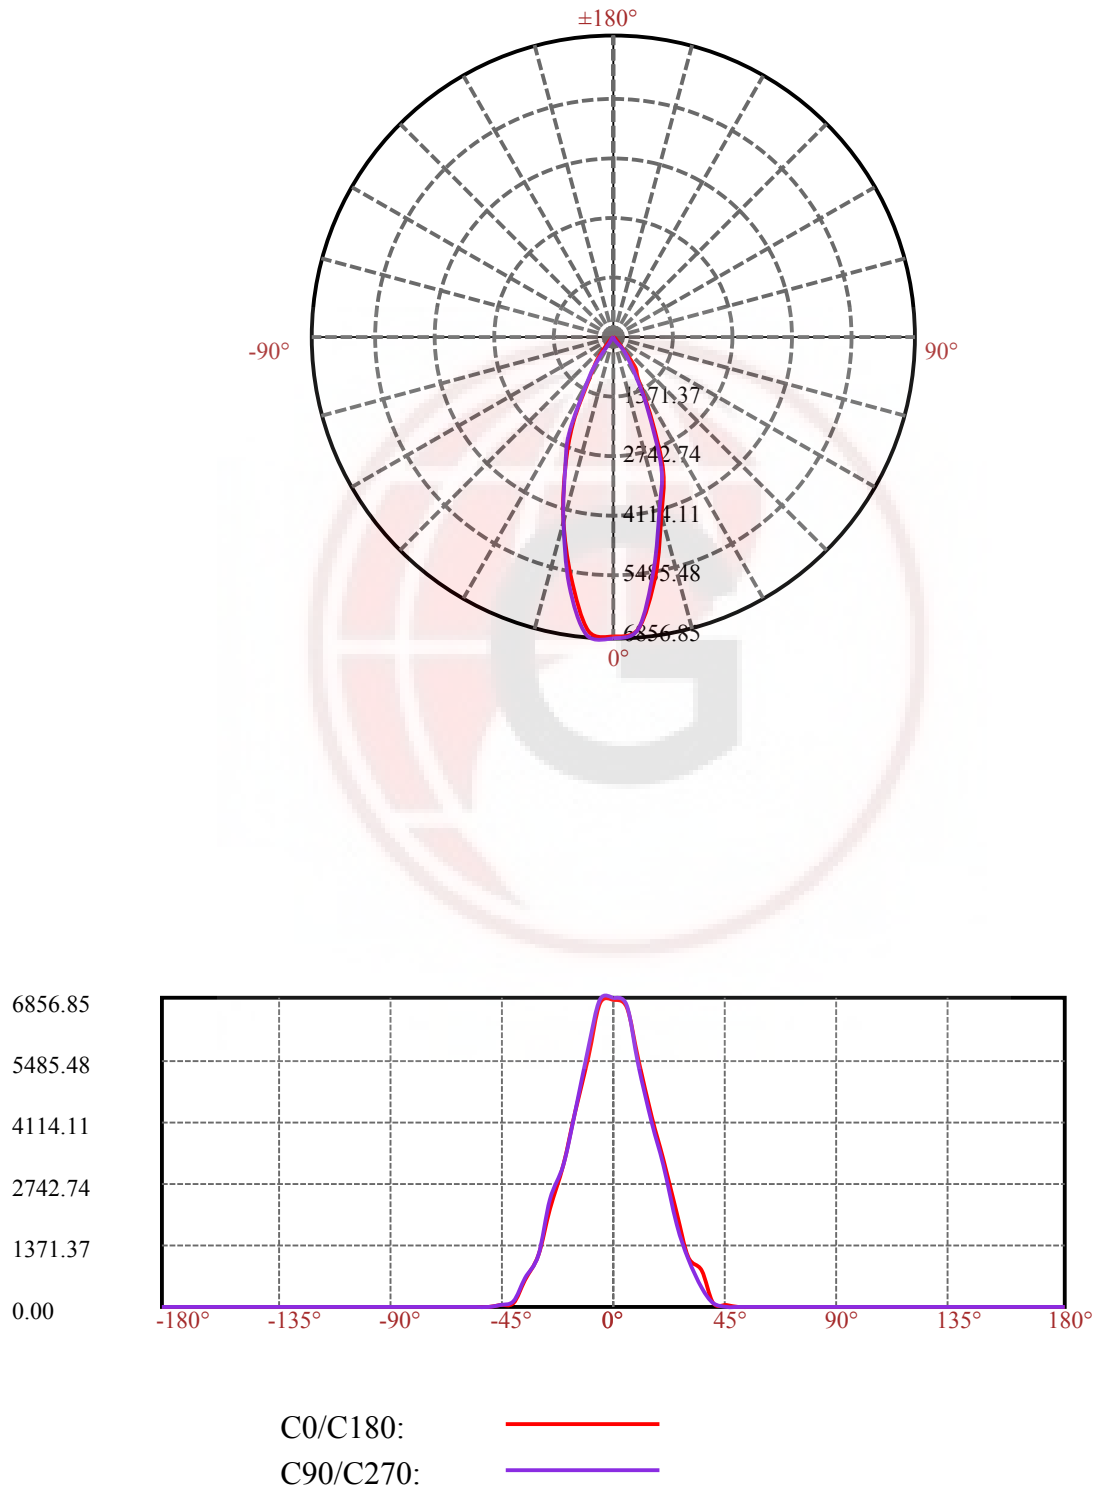


Equipment: HW-1015
Temperature(°C): 25.1


Date: 2016/7/4
Humidity(%): 60.0%

Operator: Johnson Wang
Distance(m): 12.60

Lux distance Curve

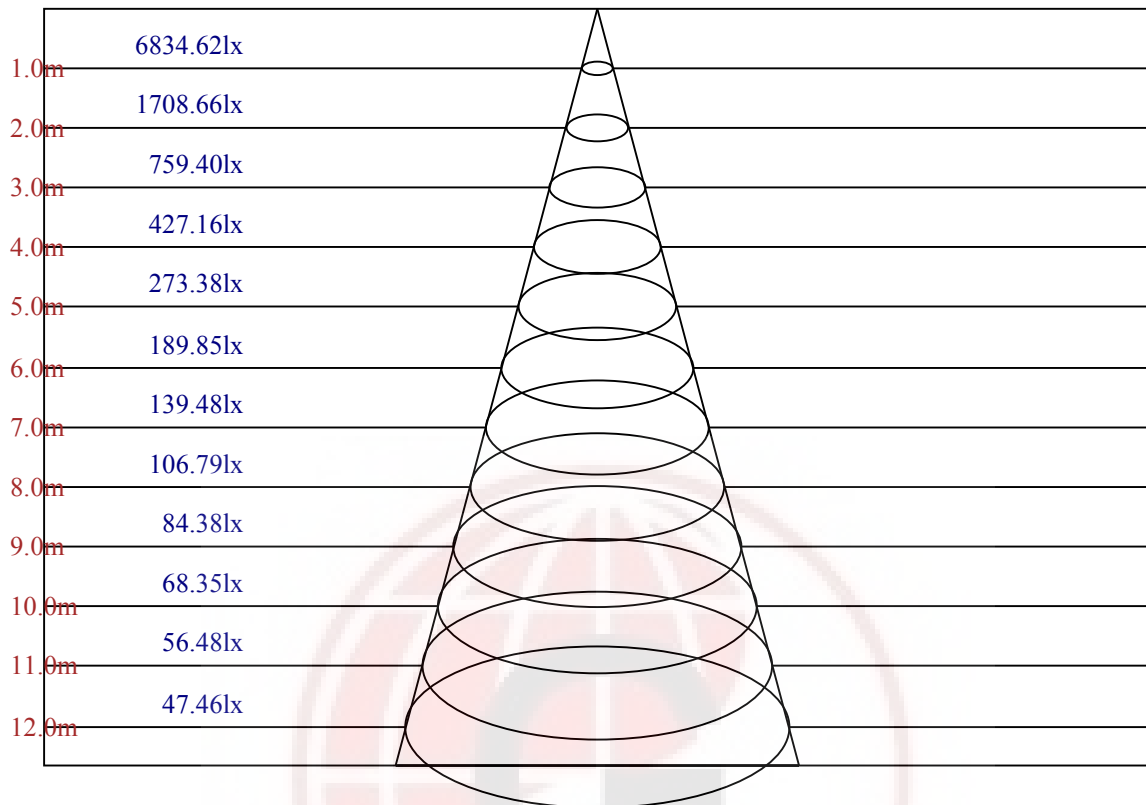

ISO-Intensity(V-H)

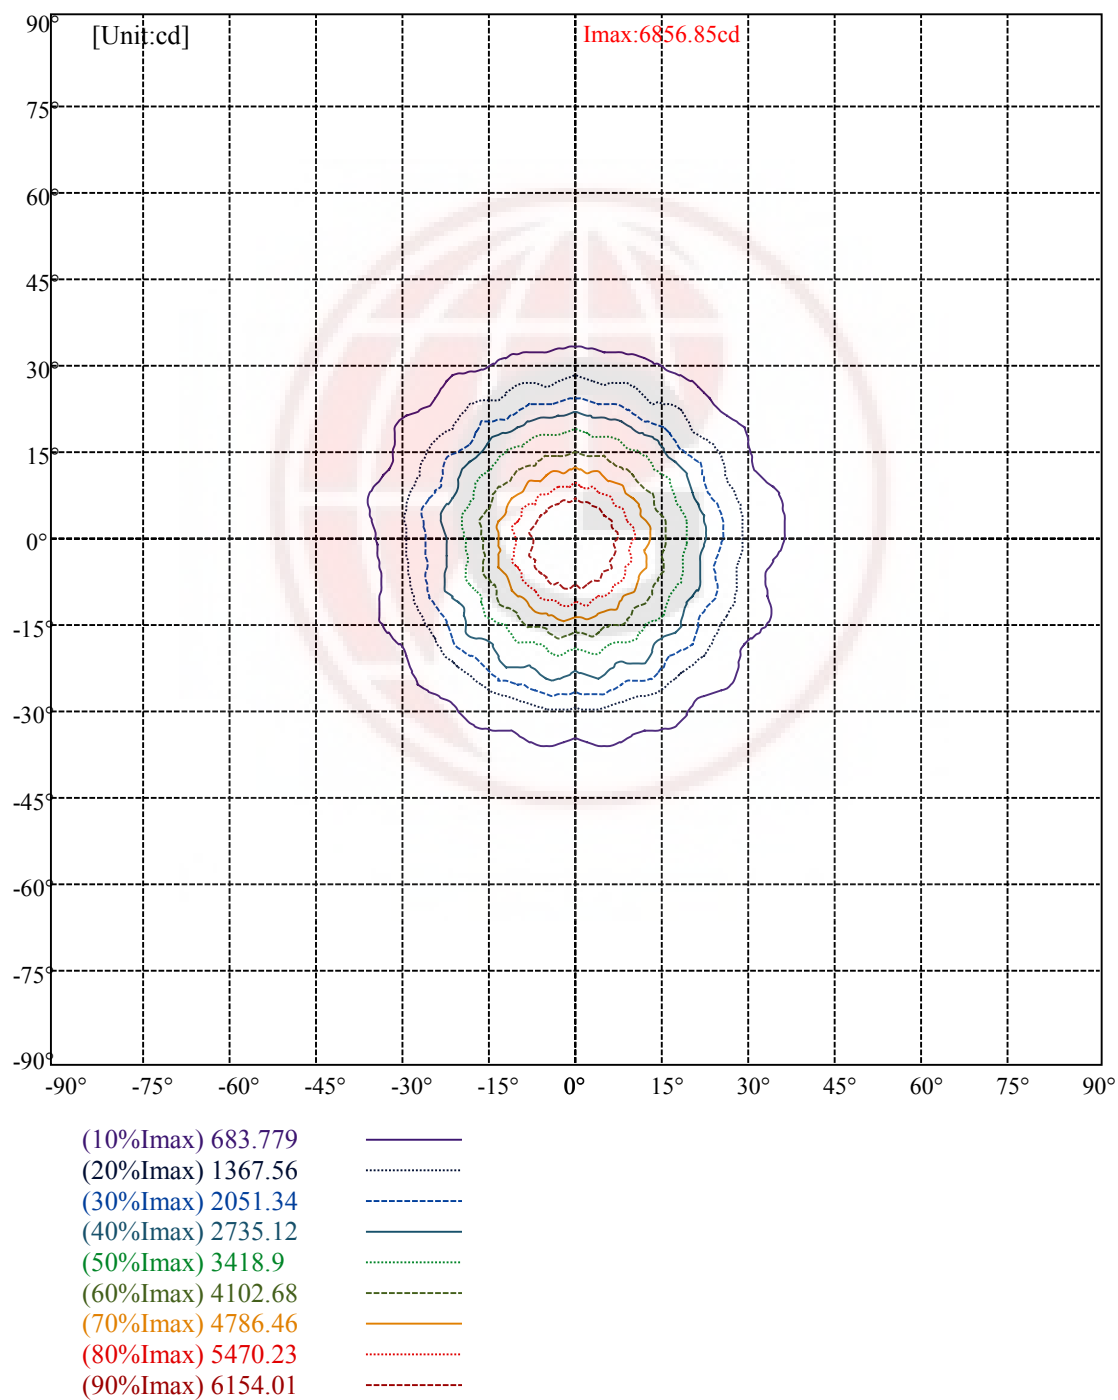


Equipment: HW-1015
Temperature(°C): 25.1

Date: 2016/7/4
Humidity(%): 60.0%

Operator: Johnson Wang
Distance(m): 12.60

ISO illuminance diagram

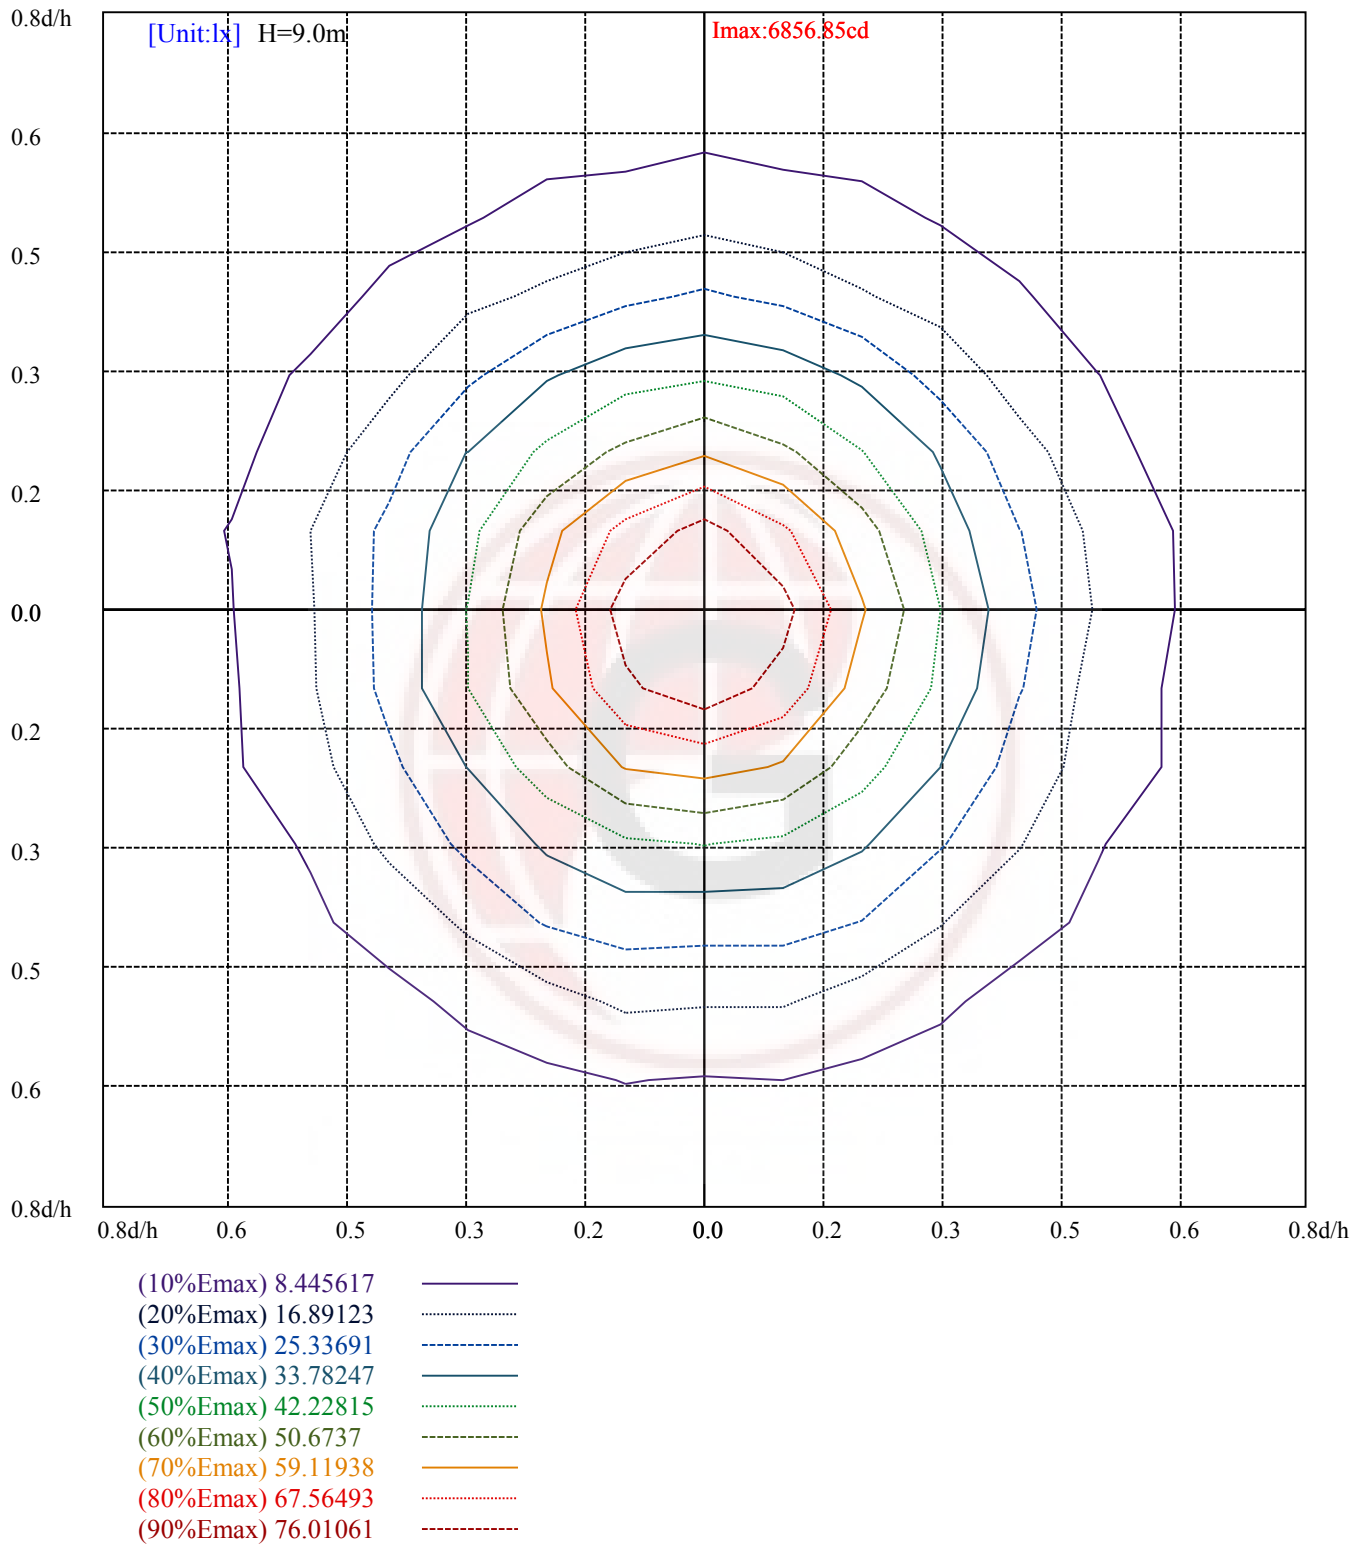

Equipment: HW-1015
Temperature(°C): 25.1

Date: 2016/7/4
Humidity(%): 60.0%

Operator: Johnson Wang
Distance(m): 12.60

Intensity data(cd)									
C/γ(°)	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0
0.0	6834.62	6658.40	5480.40	4211.90	3259.34	2095.63	1125.61	811.26	103.83
10.0	6839.38	6707.61	5535.96	4246.83	3276.81	2133.73	1131.96	819.20	104.46
20.0	6850.50	6483.76	5262.90	4010.28	3099.47	1752.39	1034.00	363.72	75.41
30.0	6837.79	6664.75	5442.29	4162.69	3219.65	1997.20	1100.21	619.32	95.41
40.0	6847.32	6423.43	5177.16	3934.07	3051.84	1551.40	1017.97	338.16	68.74
50.0	6834.62	6623.47	5358.15	4086.48	3173.61	1868.61	1093.86	440.72	86.21
60.0	6845.73	6448.83	5123.19	3891.21	3059.94	1485.52	1008.92	345.94	64.30
70.0	6836.21	6625.06	5345.45	4072.19	3165.68	1828.92	1074.81	434.21	84.78
80.0	6847.32	6456.77	5127.95	3892.80	3015.96	1546.16	988.76	324.03	65.41
90.0	6837.79	6682.21	5366.09	4091.25	3168.85	1827.33	1058.93	441.04	87.00
100.0	6844.14	6488.52	5099.37	3876.92	3073.75	1502.19	963.36	372.13	68.43
110.0	6837.79	6685.38	5393.08	4123.00	3191.08	1868.61	1068.46	470.09	91.76
120.0	6840.97	6518.69	5159.70	3932.49	3119.79	1590.62	1000.66	382.45	74.46
130.0	6839.38	6717.14	5467.69	4199.20	3256.17	2128.97	1141.48	650.60	103.99
140.0	6840.97	6574.25	5253.37	4084.90	3162.66	1752.87	1091.32	460.88	81.60
150.0	6842.56	6723.49	5661.38	4305.57	3333.96	2236.93	1216.10	816.03	115.10
160.0	6836.21	6602.83	5461.35	4197.62	3158.21	1969.10	1173.71	485.33	94.62
170.0	6845.73	6774.29	5734.41	4438.93	3403.82	2473.48	1251.03	846.19	131.29
180.0	6834.62	6720.31	5521.67	4308.75	3168.22	2155.01	1154.34	577.25	106.05
190.0	6839.38	6707.61	5594.70	4289.70	3143.13	2230.58	1156.57	516.76	103.67
200.0	6850.50	6821.92	5874.12	4519.90	3427.63	2589.38	1220.87	817.61	158.60
210.0	6837.79	6785.40	5672.50	4332.56	3154.88	2224.39	1155.14	618.05	116.21
220.0	6847.32	6828.27	5947.15	4569.11	3456.21	2675.11	1241.50	830.31	181.15
230.0	6834.62	6790.17	5750.29	4386.54	3147.42	2337.90	1189.75	628.05	130.66
240.0	6845.73	6842.56	5993.19	4611.98	3486.37	2733.85	1258.97	828.73	198.61
250.0	6836.21	6810.81	5759.81	4397.65	3148.85	2448.87	1183.40	636.63	138.92
260.0	6847.32	6850.50	5985.25	4602.45	3480.02	2708.45	1238.33	816.03	200.20
270.0	6837.79	6806.04	5737.59	4311.92	3139.00	2390.77	1131.01	618.37	148.92
280.0	6844.14	6856.85	5929.69	4561.18	3460.97	2635.42	1206.58	819.20	190.67
290.0	6837.79	6783.82	5620.10	4296.05	3140.91	2243.12	1123.07	646.95	136.69
300.0	6840.97	6845.73	5856.66	4519.90	3437.15	2671.93	1214.51	816.03	184.64
310.0	6839.38	6734.60	5532.79	4232.54	3160.75	2148.34	1131.48	558.52	127.80
320.0	6840.97	6796.52	5745.52	4434.17	3394.29	2467.13	1217.69	833.49	151.46
330.0	6842.56	6625.06	5407.37	4202.38	3155.83	2001.81	1120.69	502.48	105.89
340.0	6836.21	6729.84	5615.34	4321.45	3332.37	2295.67	1185.94	816.03	122.40
350.0	6845.73	6525.04	5267.66	4089.66	3159.48	1801.13	1089.09	421.98	85.57
360.0	6834.62	6658.40	5480.40	4211.90	3259.34	2095.63	1125.61	811.26	103.83

Equipment: HW-1015
Temperature(°C): 25.1

Date: 2016/7/4
Humidity(%): 60.0%

Operator: Johnson Wang
Distance(m): 12.60

Intensity data(cd)

C/γ(°)	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
0.0	23.34	5.72	2.86	2.22	1.75	1.59	1.43	1.27	1.11
10.0	23.81	5.72	2.86	2.38	1.75	1.59	1.11	1.27	1.27
20.0	16.19	4.92	2.70	1.91	1.59	1.43	1.11	1.11	1.43
30.0	20.48	5.24	2.86	2.22	1.59	1.43	1.43	1.27	1.11
40.0	14.45	4.60	2.54	2.06	1.59	1.27	1.43	1.11	1.11
50.0	18.73	5.08	2.86	2.22	1.43	1.43	1.27	1.43	0.95
60.0	13.34	4.60	2.54	1.91	1.43	1.43	1.27	1.43	1.11
70.0	18.42	4.76	3.02	2.22	1.75	1.43	1.43	1.43	1.27
80.0	14.61	4.60	2.70	2.06	1.59	1.27	1.27	1.11	1.27
90.0	19.37	4.60	2.86	2.06	1.75	1.43	1.27	1.43	1.11
100.0	14.29	4.45	2.86	1.91	1.59	1.59	1.43	1.43	1.11
110.0	20.00	4.92	2.86	2.06	1.75	1.43	1.43	1.11	1.27
120.0	15.72	4.60	2.70	1.91	1.59	1.59	1.11	1.59	1.11
130.0	21.91	5.40	3.02	2.06	1.75	1.43	1.43	1.27	1.27
140.0	17.78	4.76	2.70	2.06	1.59	1.43	1.27	1.27	1.11
150.0	26.20	5.72	3.18	2.06	1.91	1.75	1.43	1.59	1.11
160.0	20.80	5.08	2.86	2.22	1.91	1.59	1.43	1.43	1.11
170.0	32.86	6.51	3.18	2.22	1.75	1.59	1.27	1.43	1.27
180.0	24.61	5.72	3.18	2.22	1.59	1.59	1.43	1.27	1.43
190.0	27.31	6.03	3.02	2.06	1.75	1.75	1.27	1.27	1.11
200.0	36.20	7.62	3.49	2.22	1.75	1.75	1.27	1.27	1.43
210.0	28.42	6.51	3.33	2.38	1.91	1.27	1.59	1.27	1.11
220.0	40.33	8.26	3.97	2.54	1.75	1.59	1.43	1.11	0.95
230.0	32.70	7.62	3.33	2.06	1.91	1.59	1.27	1.43	1.27
240.0	44.61	9.21	3.97	2.38	1.91	1.75	1.27	1.27	1.27
250.0	37.47	7.94	3.49	2.22	1.59	1.59	1.43	1.43	1.11
260.0	46.04	10.00	3.97	2.54	1.75	1.75	1.27	1.27	1.27
270.0	35.09	7.30	3.49	2.38	1.75	1.43	1.27	1.27	1.11
280.0	44.45	9.37	3.97	2.54	1.91	1.43	1.43	1.27	1.43
290.0	34.13	6.99	3.49	2.22	1.75	1.43	1.43	1.27	1.27
300.0	42.07	8.73	3.81	2.38	1.75	1.59	1.27	1.27	1.59
310.0	29.85	6.35	3.18	2.22	1.75	1.43	1.11	1.27	1.11
320.0	36.83	7.62	3.49	2.54	1.59	1.43	1.27	1.43	1.27
330.0	23.66	5.72	3.02	2.06	1.59	1.59	1.43	1.43	0.95
340.0	30.32	6.67	3.02	2.22	1.75	1.59	1.27	1.27	1.11
350.0	19.05	5.56	3.02	2.06	1.75	1.43	1.27	1.43	1.27
360.0	23.34	5.72	2.86	2.22	1.75	1.59	1.43	1.27	1.11

Equipment: HW-1015
Temperature(°C): 25.1

Date: 2016/7/4
Humidity(%): 60.0%

Operator: Johnson Wang
Distance(m): 12.60

Intensity data(cd)									
C/γ(°)	90.0	95.0	100.0	105.0	110.0	115.0	120.0	125.0	130.0
0.0	1.43	0.95	1.11	1.43	1.11	1.43	0.95	1.27	1.43
10.0	1.27	1.27	1.27	1.27	1.11	0.95	1.11	1.27	1.27
20.0	1.11	0.95	1.27	1.11	1.11	1.11	1.11	1.11	1.59
30.0	1.27	1.11	1.11	1.11	1.11	1.27	1.27	1.43	1.59
40.0	1.11	1.27	1.43	0.95	1.27	1.27	1.27	1.59	1.43
50.0	1.43	0.95	1.11	1.27	1.27	1.43	1.11	1.27	1.27
60.0	1.11	1.43	1.11	1.11	1.11	1.27	1.27	1.43	1.43
70.0	1.11	1.27	1.27	1.27	1.11	1.27	1.11	1.27	1.59
80.0	1.11	1.11	1.11	1.11	1.27	1.43	1.27	1.27	1.59
90.0	1.11	1.27	1.27	0.95	1.27	1.27	1.27	1.43	1.27
100.0	1.43	1.11	1.43	1.27	1.27	1.43	1.11	1.59	1.27
110.0	1.11	1.27	1.11	0.95	1.11	1.27	1.27	1.43	1.43
120.0	1.27	1.11	1.43	1.11	1.27	1.11	1.11	1.27	1.59
130.0	1.11	1.11	1.27	1.27	1.43	1.11	1.27	1.27	1.43
140.0	1.27	1.27	1.43	1.27	1.11	1.43	1.27	1.43	1.27
150.0	1.11	1.27	1.27	1.27	1.43	0.95	1.27	1.43	1.43
160.0	1.27	1.11	1.11	1.11	1.11	1.11	1.43	1.11	1.59
170.0	1.27	1.27	1.27	1.27	1.11	1.11	1.43	1.43	1.43
180.0	1.11	1.11	1.27	0.95	1.11	1.27	1.27	1.27	1.43
190.0	1.11	1.11	1.27	1.11	1.27	1.11	1.11	1.43	1.43
200.0	1.11	1.27	1.11	1.11	1.11	1.11	1.11	1.27	1.43
210.0	1.27	1.27	0.95	1.43	1.27	1.27	1.27	1.11	1.27
220.0	1.27	1.11	1.27	0.95	1.11	1.27	1.11	1.27	1.27
230.0	1.11	1.11	1.27	1.27	1.27	1.11	1.11	1.43	1.27
240.0	1.27	0.95	1.11	1.27	1.27	1.11	1.27	1.27	1.27
250.0	1.27	1.27	1.27	1.27	1.11	1.27	1.11	1.43	1.43
260.0	1.11	1.27	1.27	1.11	1.11	1.43	0.95	1.11	1.27
270.0	1.27	1.27	1.11	1.27	1.11	1.27	1.27	1.27	1.59
280.0	1.27	1.27	1.11	1.27	1.27	1.27	0.95	0.95	1.59
290.0	1.27	1.11	1.43	1.11	1.27	1.11	1.27	1.11	1.27
300.0	1.11	1.27	0.95	1.11	1.27	1.11	1.27	1.27	1.43
310.0	1.27	1.11	1.27	1.11	1.27	1.11	1.11	1.11	1.43
320.0	1.11	1.43	1.27	1.27	1.27	1.11	1.43	1.43	1.43
330.0	1.43	1.11	1.27	1.11	1.11	1.11	1.27	1.11	1.59
340.0	1.27	1.27	1.27	1.43	0.95	1.11	1.27	1.43	1.27
350.0	1.27	1.27	1.27	1.11	1.11	1.27	1.43	1.27	1.59
360.0	1.43	0.95	1.11	1.43	1.11	1.43	0.95	1.27	1.43

Equipment: HW-1015
Temperature(°C): 25.1

Date: 2016/7/4
Humidity(%): 60.0%

Operator: Johnson Wang
Distance(m): 12.60

Intensity data(cd)

C/γ(°)	135.0	140.0	145.0	150.0	155.0	160.0	165.0	170.0	175.0
0.0	1.59	1.75	2.06	2.38	2.86	3.18	3.33	3.49	3.49
10.0	1.91	1.75	2.22	2.54	2.70	3.18	3.18	3.49	3.49
20.0	1.59	1.75	2.06	2.70	3.02	3.02	3.18	3.81	3.81
30.0	1.59	1.75	2.06	2.54	2.70	3.18	3.33	3.49	3.65
40.0	1.91	2.06	2.06	2.54	3.02	3.33	3.33	3.65	3.65
50.0	1.75	2.06	2.22	2.38	2.86	3.02	3.33	3.65	3.49
60.0	1.91	1.75	2.54	2.70	2.86	3.18	3.33	3.65	3.65
70.0	1.75	1.75	2.22	2.54	2.86	3.33	3.49	3.65	3.65
80.0	1.75	1.91	2.54	2.70	3.18	3.33	3.33	3.65	3.65
90.0	1.59	1.91	2.38	2.54	2.86	3.33	3.18	3.49	3.65
100.0	1.75	1.91	2.22	2.70	2.86	3.33	3.49	3.33	3.65
110.0	1.59	1.91	1.91	2.70	2.86	3.18	3.33	3.49	3.65
120.0	1.59	2.06	2.22	2.54	2.86	3.18	3.18	3.49	3.65
130.0	1.75	1.91	2.06	2.70	2.70	3.18	3.33	3.49	3.81
140.0	1.91	1.75	2.22	2.38	3.02	3.18	3.33	3.49	3.65
150.0	1.59	1.75	1.91	2.38	2.70	3.18	3.02	3.49	3.65
160.0	1.43	1.91	2.22	2.38	2.70	3.02	3.33	3.33	3.49
170.0	1.59	1.91	1.91	2.54	2.70	3.18	3.49	3.33	3.65
180.0	1.43	1.91	2.22	2.54	3.02	3.02	3.33	3.49	3.65
190.0	1.43	1.59	1.91	2.38	2.70	2.86	3.33	3.33	3.33
200.0	1.27	1.59	2.06	2.54	2.70	3.02	3.02	3.49	3.49
210.0	1.59	1.75	2.06	2.54	2.86	2.86	3.02	3.49	3.33
220.0	1.59	1.59	2.22	2.22	2.54	3.02	3.18	3.33	3.65
230.0	1.43	1.91	2.06	2.54	2.54	2.86	3.18	3.49	3.49
240.0	1.59	1.75	1.91	2.22	2.70	2.54	3.33	3.49	3.65
250.0	1.43	1.91	2.06	2.22	2.54	2.86	3.33	3.18	3.49
260.0	1.27	1.75	1.91	2.54	2.70	3.02	3.49	3.49	3.49
270.0	1.43	1.75	1.91	2.54	2.86	3.18	3.18	3.33	3.65
280.0	1.59	1.75	1.91	2.22	2.86	2.86	3.33	3.65	3.49
290.0	1.43	1.75	2.22	2.38	2.86	2.86	3.49	3.49	3.65
300.0	1.59	1.59	2.06	2.38	2.70	3.02	3.18	3.65	3.65
310.0	1.59	1.75	2.06	2.38	2.86	3.02	3.49	3.49	3.49
320.0	1.59	1.75	1.91	2.38	2.70	2.86	3.33	3.49	3.65
330.0	1.43	1.91	2.22	2.54	2.70	3.02	3.33	3.18	3.49
340.0	1.43	1.75	1.91	2.38	2.70	3.02	3.18	3.33	3.65
350.0	1.59	1.91	2.22	2.54	3.02	3.18	3.33	3.49	3.33
360.0	1.59	1.75	2.06	2.38	2.86	3.18	3.33	3.49	3.49

Intensity data(cd)

C/ γ (°)	180.0
0.0	3.81
10.0	3.81
20.0	3.49
30.0	3.65
40.0	3.65
50.0	3.65
60.0	3.81
70.0	3.97
80.0	3.65
90.0	3.65
100.0	3.65
110.0	3.65
120.0	3.81
130.0	3.49
140.0	3.65
150.0	3.65
160.0	3.81
170.0	3.49
180.0	3.81
190.0	3.81
200.0	3.49
210.0	3.65
220.0	3.65
230.0	3.65
240.0	3.81
250.0	3.97
260.0	3.65
270.0	3.65
280.0	3.65
290.0	3.65
300.0	3.81
310.0	3.49
320.0	3.65
330.0	3.65
340.0	3.81
350.0	3.49
360.0	3.81





Great One Global Certification Co., Ltd.

9F-2, No. 120, Qiaohe Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Website : www.go-safety.com.tw

TEL : +886-2-2248-0810

E-mail : sales@go-safety.com.tw

FAX : +886-2-2248-0811

1. Luminaire Specification :

- (1) Input Voltage / Frequency : 240.00 Vac / 50 Hz
- (2) Input Watt : 29.72 W
- (3) Input Current : 0.132 A
- (4) Total Luminous Flux Output : 3194.06 lm
- (5) Luminaire Efficacy : 107.47 lm/W
- (6) Central Intensity : 6834.618 cd
- (7) Maximum Intensity : 6856.845 cd
- (8) PF : 0.929
- (9) Beam Angle : (C0-C180) : 38.1 ° , (C90-C270) : 37.4 °
- (10) Correlated Color Temperature (CCT) : 3945 K
- (11) Duv : +0.00263
- (12) Color Rendering Index (CRI) : 82.6

2. Description of EUT Setup :

- (1) Operating Orientation : The light source is considered as horizontal
- (2) Light Source : LED
- (3) Stabilization time : 1 Hour
- (4) Environment Condition : Temperature : 25±1 °C , Humidity : 60±20 %



Great One Global Certification Co., Ltd.

9F-2, No. 120, Qiaohe Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Website : www.go-safety.com.tw



TEL : +886-2-2248-0810

E-mail : sales@go-safety.com.tw

FAX : +886-2-2248-0811

3. Photograph of EUT :

Complete Sample Angle Definition

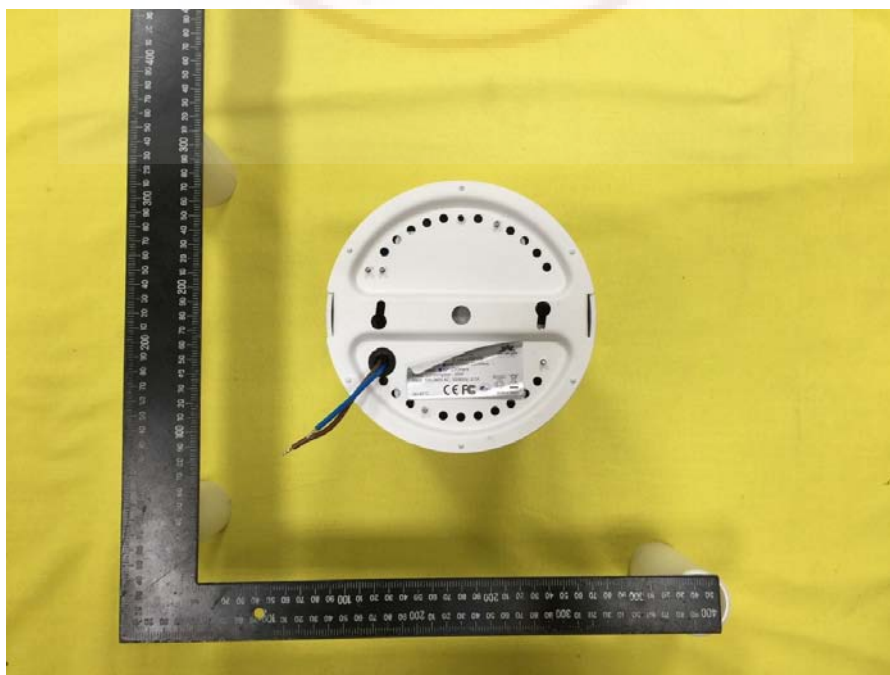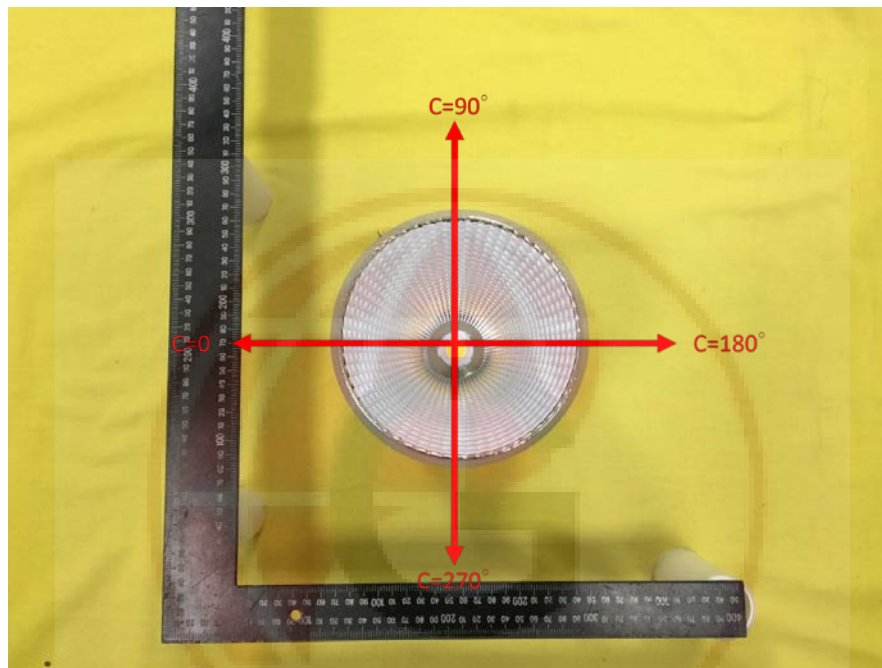



Great One Global Certification Co., Ltd.

9F-2, No. 120, Qiaoh Rd., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Website : www.go-safety.com.tw

TEL : +886-2-2248-0810

E-mail : sales@go-safety.com.tw

FAX : +886-2-2248-0811

4. Equipments List:

Equipment List				
Equipment ID	Equipment Type	Cal. Date	Due Date	Range Used
L201	Integrating Sphere	N/A	N/A	
L250	Spetroradiometer	N/A	N/A	
L203	AC Power Source	N/A	N/A	
L222	Power Meter	2015/10/10	2016/10/09	V : Auto (0~300Vac) A : Auto (0~20A)
L217	Goniophotometer Photo Detector	N/A	N/A	
L218	Goniophotometer System	N/A	N/A	
L219	AC Power Source	N/A	N/A	AC 0~150VAC4.2A AC0~300VAC2.1A
L220	Power Meter	2015/08/26	2016/08/25	V : Auto (0~300Vac) A : Auto (0~20A)
L221	Luminous Intensity Lamp	2015/11/13	2016/11/12	
L242	DC Standard Light	2015/10/14	2016/10/13	