



Features

- Slim, compact and fashionable design
- Low Power Consumption
- Elegant structure, designed to dissipate heat
- 6x longer lifespan than fluorescent lamps: 30,000 hours
- Available in 3 different color temperatures
- Ideal replacement for tube lights and grid lights
- Eco-friendly: No UV, no IR, & no mercury
- Bundled driver with PFC and OTP/SCP functions
- Passed IEC 60598-1(2008) 、 IEC 60695-2-11 850°C glow wire test (optional).



Specifications

GL-PL0303 (Non-Dimmable)



Type	GL-PL0303-WW	GL-PL0303-NW	GL-PL0303-CW
Energy Used	15.5 W		
Rated Life	30,000 Hours		
Input Voltage	100-240V AC (Driver with cUL Certificate)		
Power Factor (PF)	0.88 at 120V AC, 0.8 at 240V AC		
CCT (color)	3000K	4000K	5700K
Luminous Flux	1000 lm	1050 lm	1200 lm
System Efficacy	65 lm/W	68 lm/W	77 lm/W
CRI (Minimum)	80	80	80
Beam Angle	110°		
Dimension	295 x 295 x 13mm		
Operation Temperature	-20°C ~ +40°C		
IP Rating	IP20		
Net Weight	1.1kg (with driver)		
Package	10 PCS / Carton		
Bundled Driver	GP-HS15P-22C1		

GL-PL0303DA (DC- Dimmable 1-10V/ PWM/ Resistor)


Type	GL-PL0303DA-WW	GL-PL0303DA-NW	GL-PL0303DA-CW
Energy Used	15.5W		
Rated Life	30,000 Hours		
Input Voltage	100-240V AC		
Power Factor (PF)	0.88 at 120V AC, 0.8 at 240V AC without dimmer		
CCT (color)	3000K	4000K	5700K
Luminous Flux	1000 lm	1050 lm	1200 lm
System Efficacy	65 lm/W	68 lm/W	77 lm/W
CRI (Minimum)	80	80	80
Beam Angle	110°		
Dimension	295 x 295 x 13mm		
Operation Temperature	-20°C ~ +40°C		
IP Rating	IP20		
Net Weight	1.1kg (with driver)		
Package	10 PCS / Carton		
Bundled Driver	GP-HS15P-24CA (for 1-10V/PWM/Resistor)		

Luminous Intensity Distribution Diagram

GL-PL0303-WW / CCT : 3000K

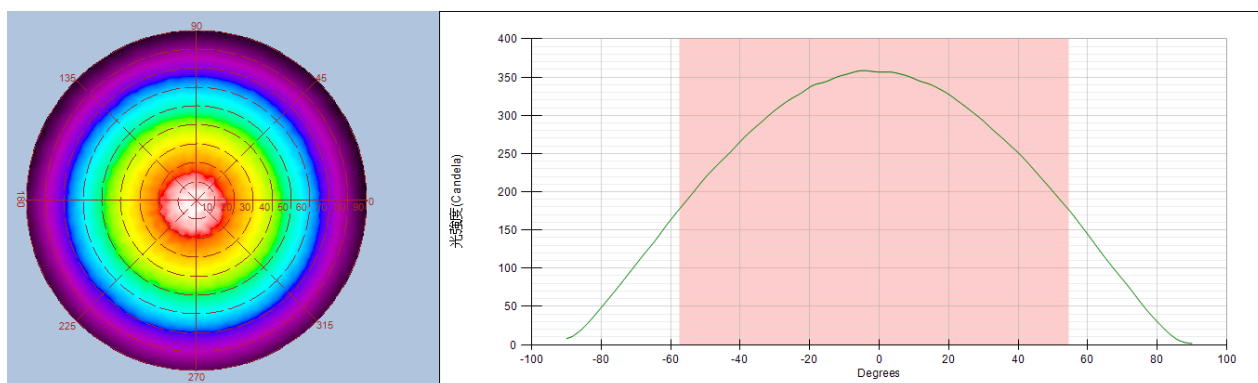
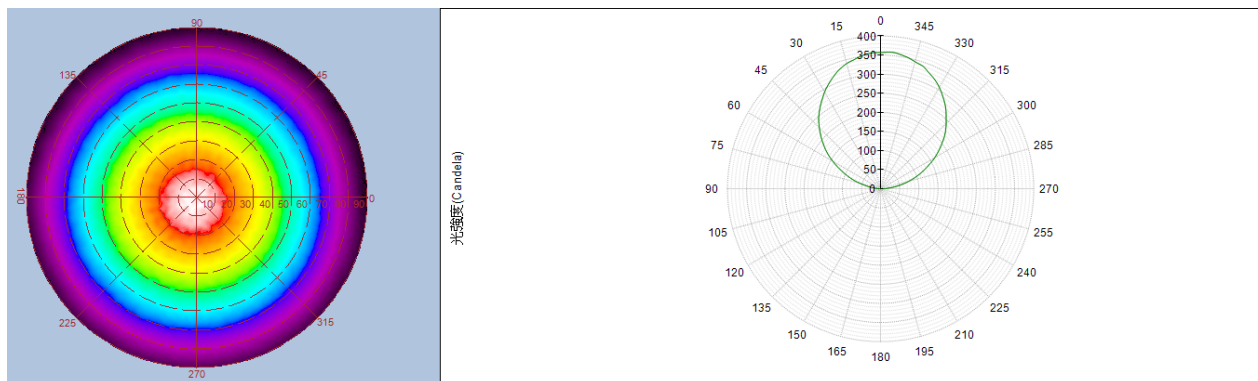


Height	E Avg.	E Max.	Diameter
1.0M	177 Lx	389 Lx	296 cm
2.0M	43 Lx	92 Lx	593 cm
3.0M	19 Lx	40 Lx	889 cm
4.0M	11 Lx	22 Lx	1186 cm
5.0M	7 Lx	14 Lx	1482 cm

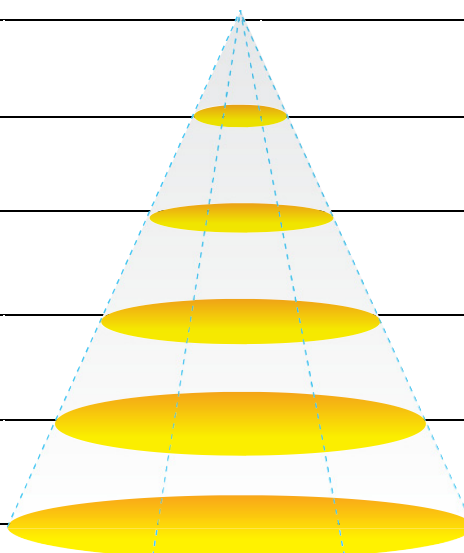


Luminous Intensity Distribution Diagram

GL-PL0303-NW / CCT : 4000K

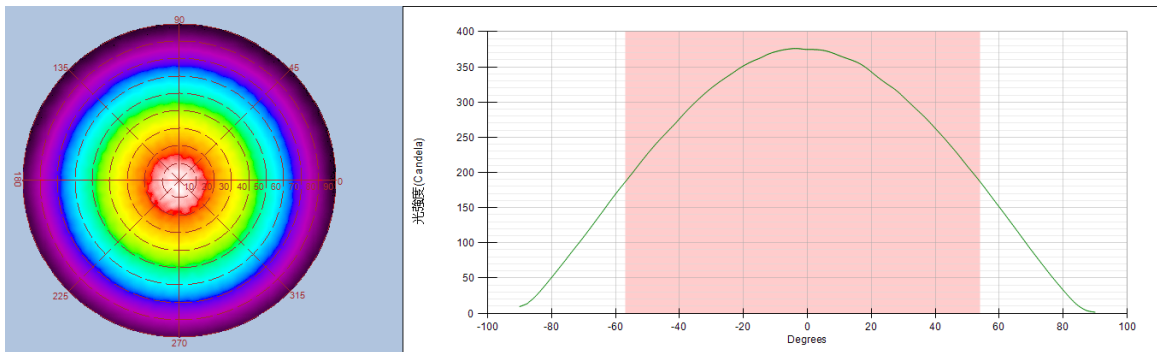
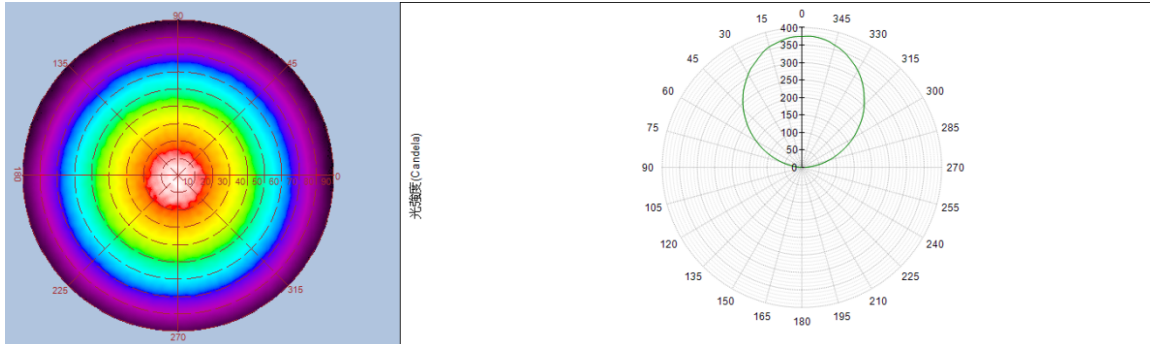


Height	E Avg.	E Max.	Diameter
1.0M	189 Lx	412 Lx	291 cm
2.0M	46 Lx	97 Lx	582 cm
3.0M	20 Lx	43 Lx	873 cm
4.0M	11 Lx	24 Lx	1164 cm
5.0M	7 Lx	15 Lx	1455 cm

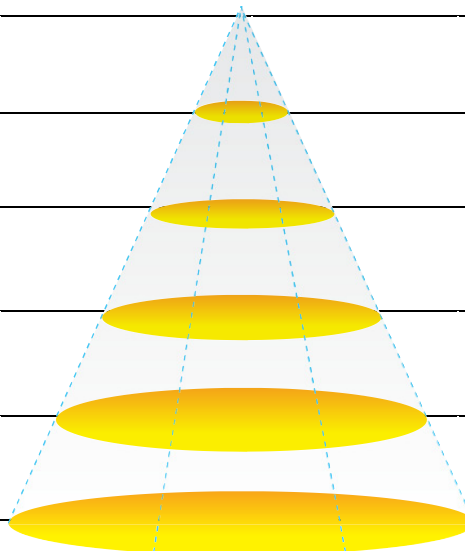


Luminous Intensity Distribution Diagram

GL-PL0303-CW / CCT : 5700K

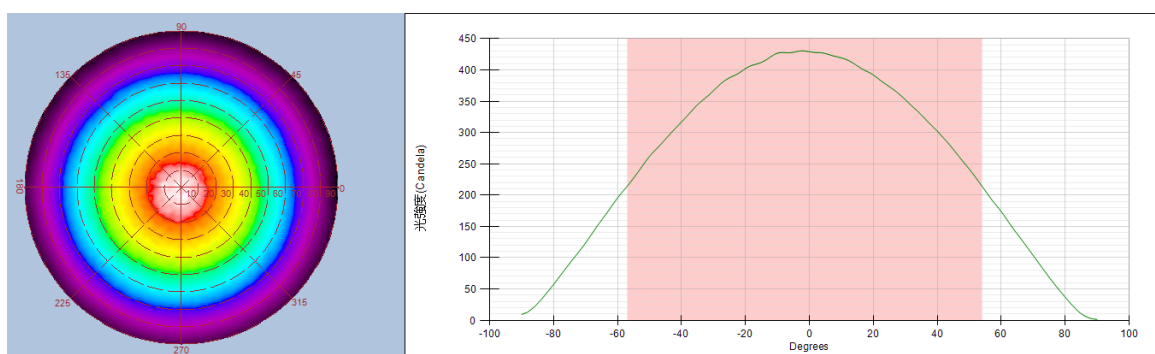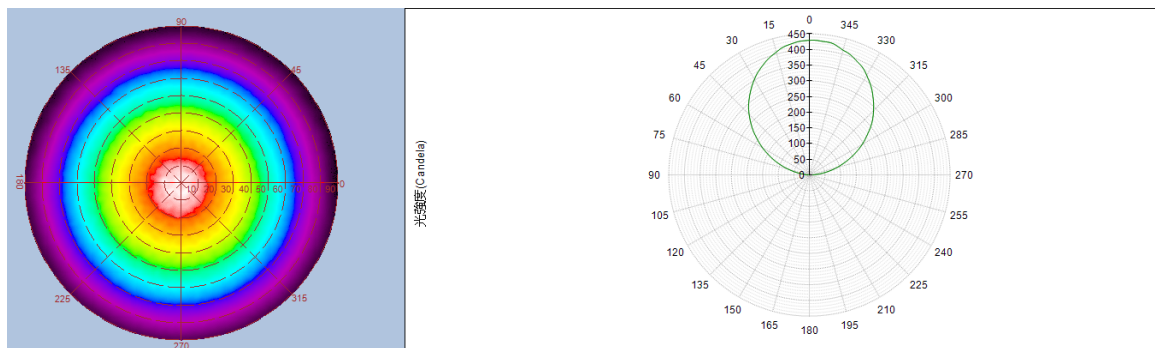

Height	E Avg.	E Max.	Diameter
1.0M	215 Lx	464 Lx	293 cm
2.0M	52 Lx	111 Lx	587 cm
3.0M	23 Lx	49 Lx	881 cm
4.0M	13 Lx	27 Lx	1174 cm
5.0M	8 Lx	17 Lx	1468 cm

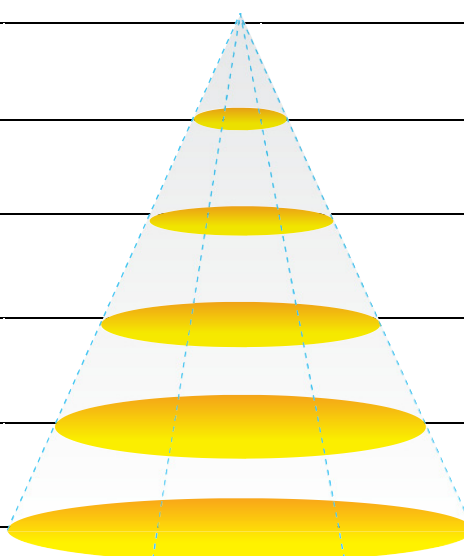

Outline / Dimension

