



Features


- Slim, compact and fashionable design
- Low Power Consumption
- Elegant structure, designed to dissipate heat
- 6x longer lifespan than fluorescent lamps: 30,000 hours
- Available in 3 different color temperatures
- Ideal replacement for tube lights and grid lights
- Eco-friendly: No UV, no IR, & no mercury
- Bundled driver with active PFC and OTP/OVP/SCP functions
- Passed IEC 60598-1(2008) 、 IEC 60695-2-11 850°C glow wire test (optional) .



Specifications



Type	GL-PL0306-WW	GL-PL0306-NW	GL-PL0306-CW
Energy Used	23 W		
Rated Life	30,000 Hours		
Input Voltage	100-240V AC		
Power Factor (PF)	0.9 at 120V AC, 0.7 at 240V AC		
CCT (color)	3000K	4000K	5700K
Luminous Flux	1500 lm	1600 lm	1800 lm
System Efficacy	65 lm/W	70 lm/W	78 lm/W
CRI (Minimum)	80	80	80
Beam Angle	110°		
Dimension	295 x 595 x 13 mm		
Operation Temperature	-20°C ~ +40°C		
IP Rating	IP20		
Net Weight	2 kg (with driver)		
Package	5 PCS / Carton		
Bundled Driver	GP-HS25P-24C		

Outline / Dimension

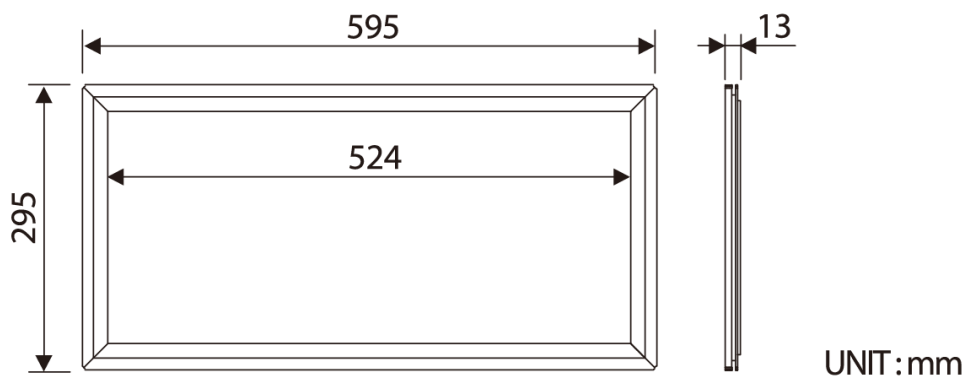


Luminous Intensity Distribution Diagram

GL-PL0306-WW / CCT : 3000K

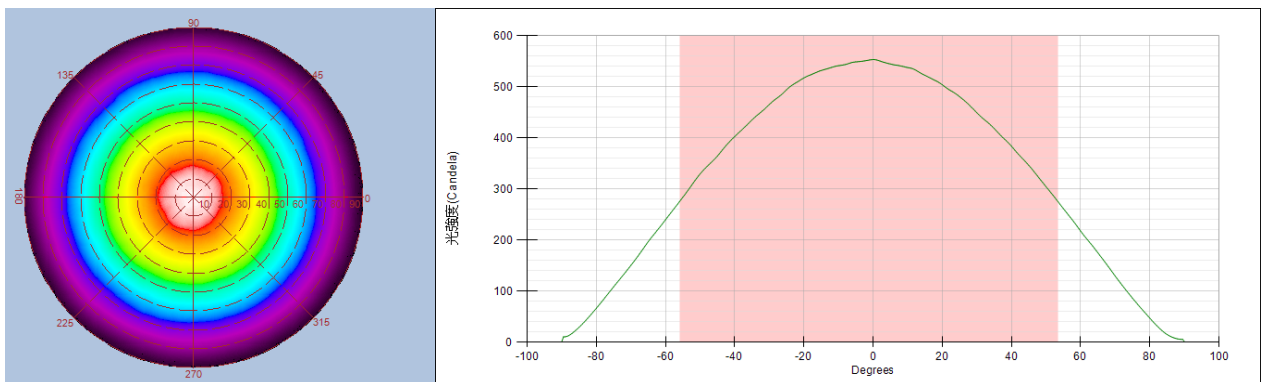
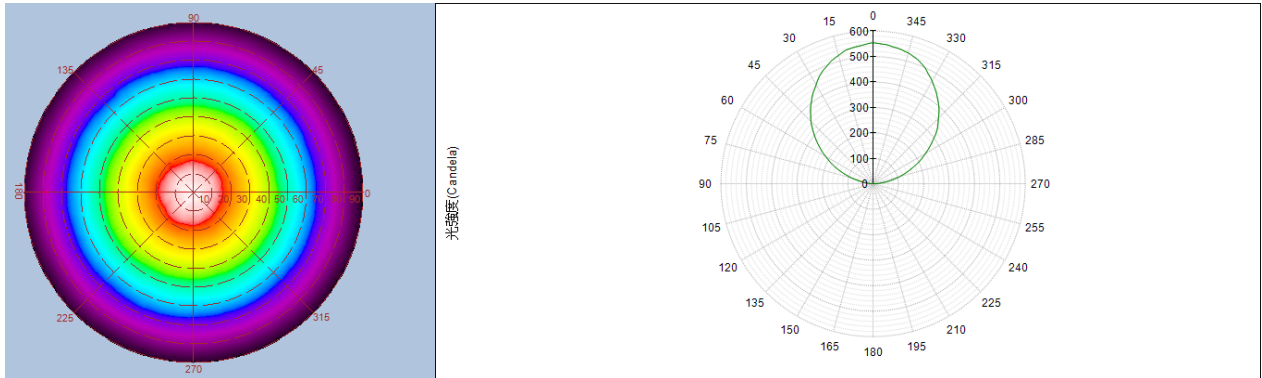


Height	E Avg.	E Max.	Diameter
1.0M	266 Lx	539 Lx	282 cm
2.0M	66 Lx	134 Lx	565 cm
3.0M	29 Lx	60 Lx	848 cm
4.0M	17 Lx	34 Lx	1131 cm
5.0M	11 Lx	22 Lx	1414 cm

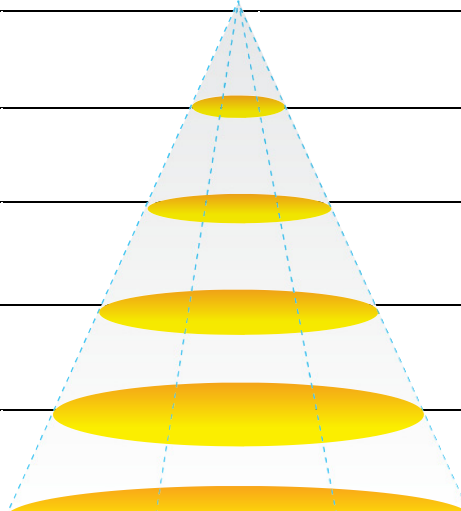


Luminous Intensity Distribution Diagram

GL-PL0306-NW / CCT : 4000K

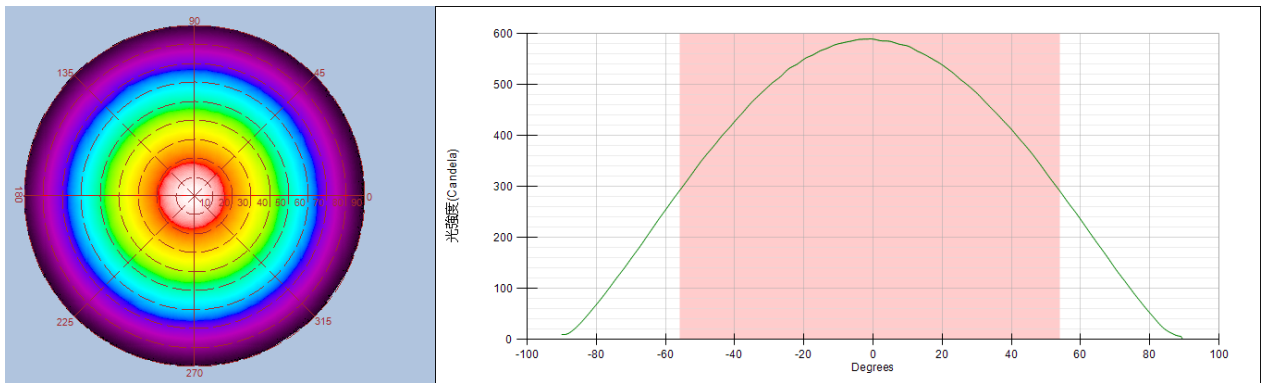
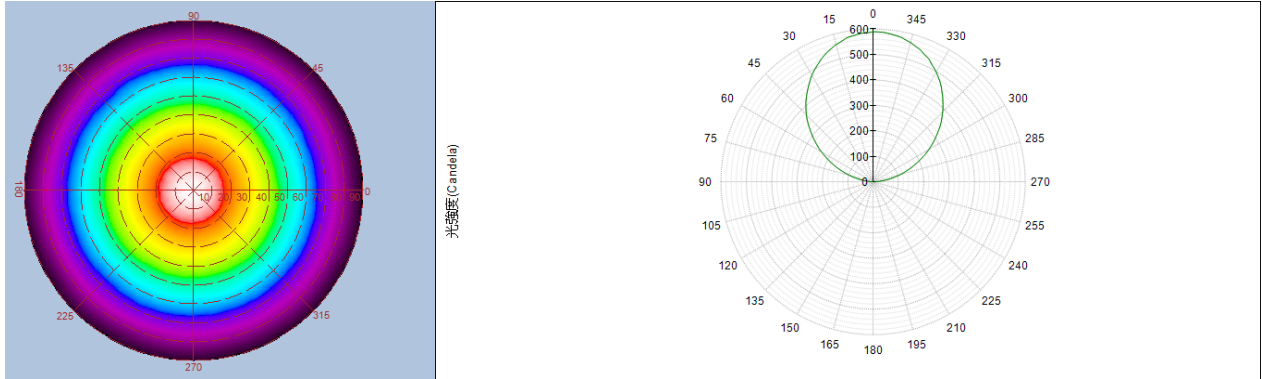


Height	E Avg.	E Max.	Diameter
1.0M	282 Lx	578 Lx	285 cm
2.0M	70 Lx	144 Lx	571 cm
3.0M	31 Lx	64 Lx	856 cm
4.0M	18 Lx	36 Lx	1142 cm
5.0M	11 Lx	23 Lx	1428 cm

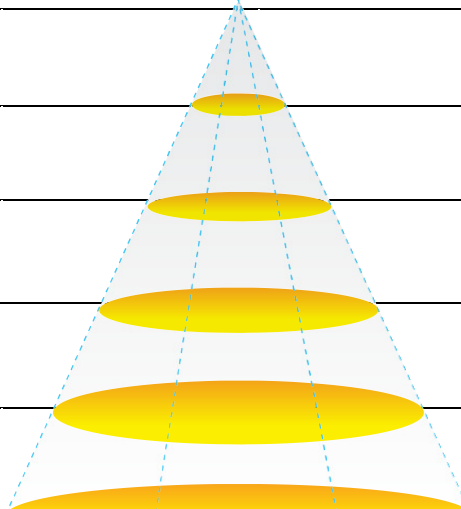

Luminous Intensity Distribution Diagram

GL-PL0306-CW / CCT : 5700K

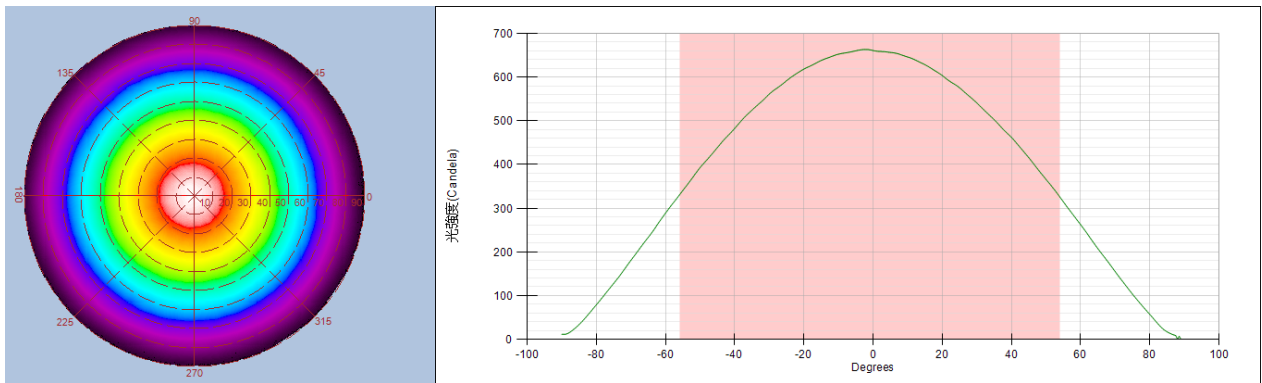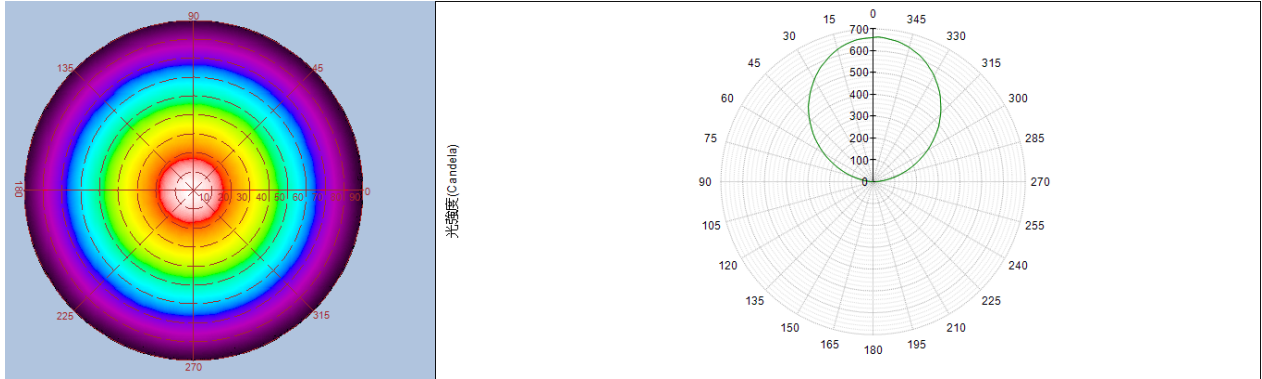

Height	E Avg.	E Max.	Diameter
1.0M	317 Lx	652 Lx	285 cm
2.0M	79 Lx	162 Lx	571 cm
3.0M	35 Lx	72 Lx	856 cm
4.0M	20 Lx	40 Lx	1142 cm
5.0M	13 Lx	26 Lx	1428 cm

