



Features


- DL06LD-IP can also be used in covered outdoor applications
- DC input
- 10.5 W energy consumption
- Energy efficient and preventing possible energy waste
- All-in-one bulb and fixture
- Directly compatible with 12V and 24V solar panels
- Slim, compact and fashionable design
- Very low power consumption
- No UV or IR radiation
- Bundled driver with OVP/SCP/UVLO functions
- Passed IEC 60598-1(2008) 、 IEC 60695-2-11 850°C glow wire test (optional).



Specifications


Type	GL-DL06LD-IP-WW	GL-DL06LD-IP-NW	GL-DL06LD-IP-CW
Energy Used	10.5 W		
Rated Life	30,000 Hours		
Input Voltage	11-15V DC / 22-30V DC		
CCT (color)	3000K	4000K	6000K
Luminous Flux	800 lm	820 lm	890 lm
System Efficacy	76 lm/W	78 lm/W	85 lm/W
CRI (Minimum)	80	80	80
Beam Angle	110°		
Dimension	Φ 161 x 20 mm		
IP Rating	IP54		
Operation Temperature	-20°C ~ +40°C		
Bundled Driver	GP-LD10-30C (Driver Output: Constant Current 350mA, 30V)		
Net Weight	420 g (with driver)		
Package	10 Boxes / Carton		
Fixture Hole	Φ 152 mm		

Outline / Dimension


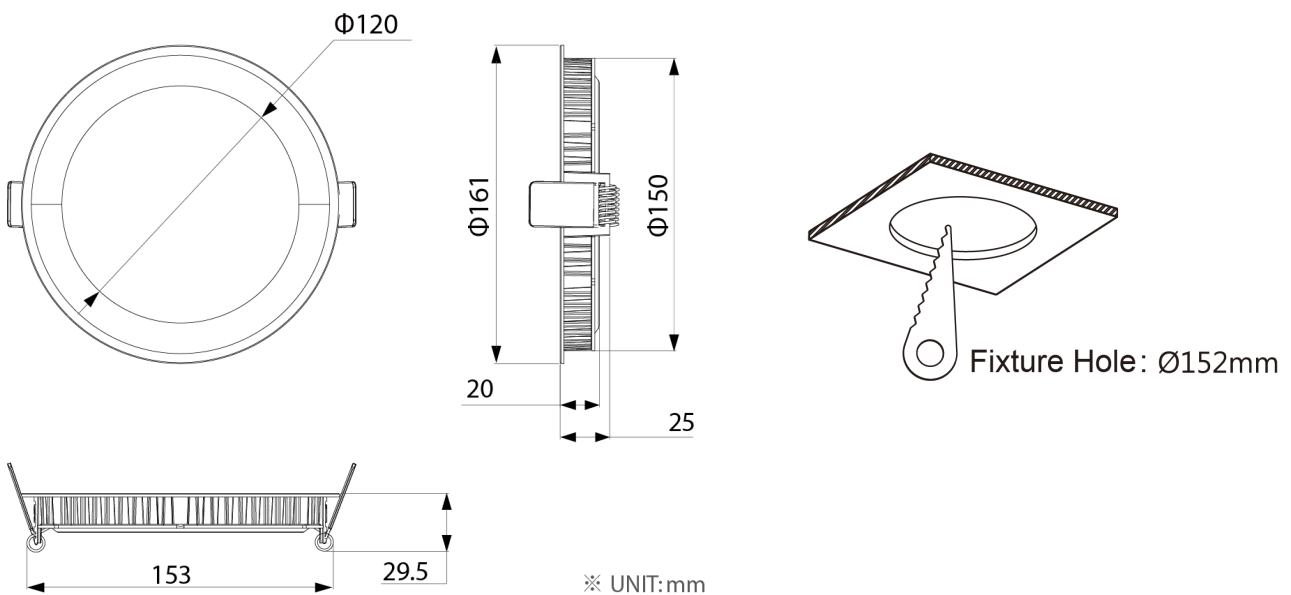


Luminous Intensity Distribution Diagram


GL-DL06-IP -WW/CCT: 3000K

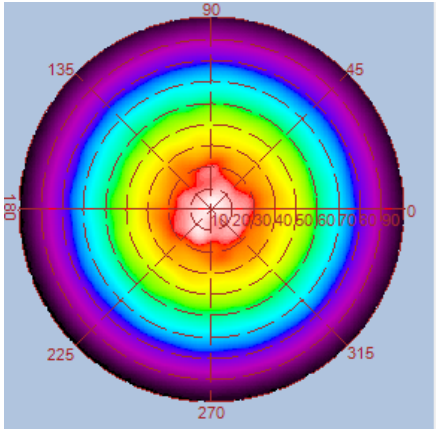


光強度(Candela)

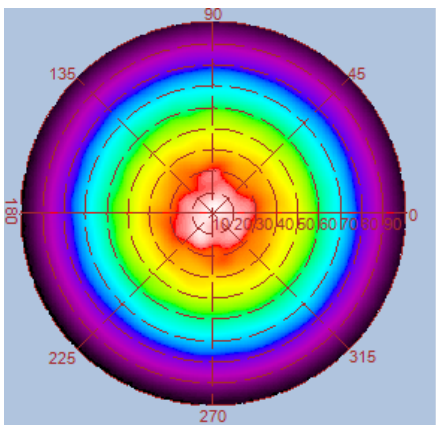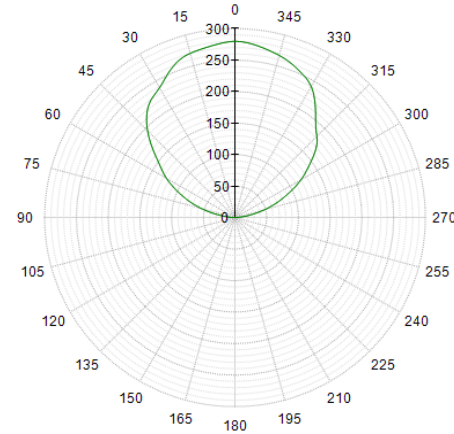

光強度(Candela)




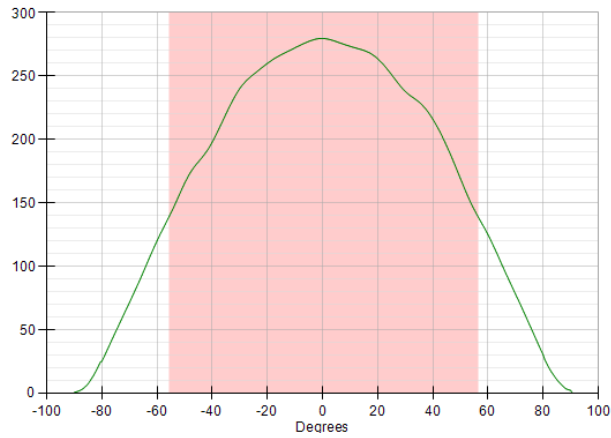


Height	E Avg.	E Max.	Diameter
1.0M	139 Lx	307 Lx	296 cm
2.0M	33 Lx	72 Lx	593 cm
3.0M	14 Lx	31 Lx	889 cm
4.0M	8 Lx	17 Lx	1186 cm
5.0M	5 Lx	11 Lx	1482 cm

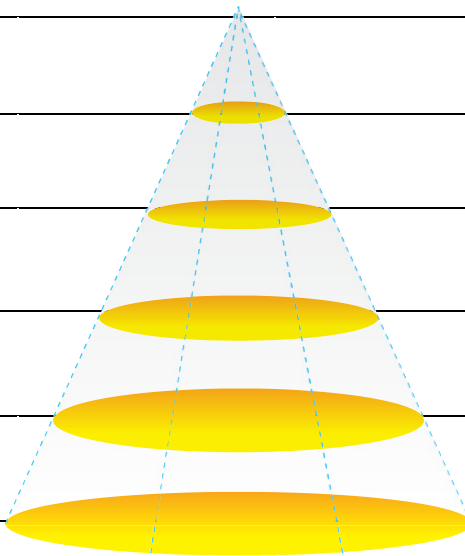


Luminous Intensity Distribution Diagram

GL-DL06-IP-NW/ CCT: 4000K

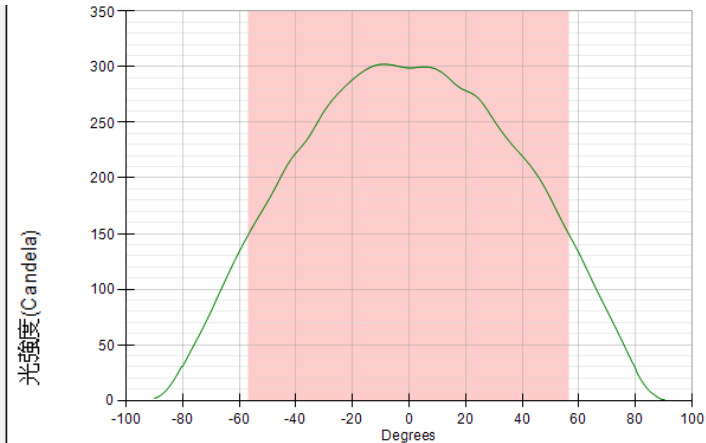
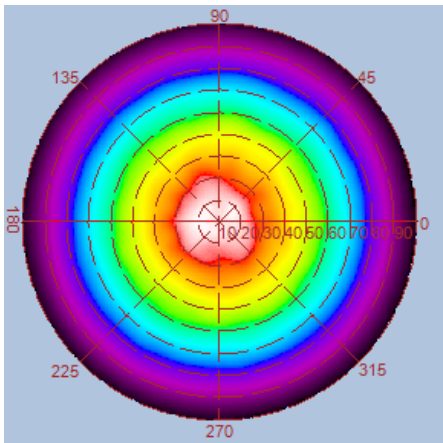
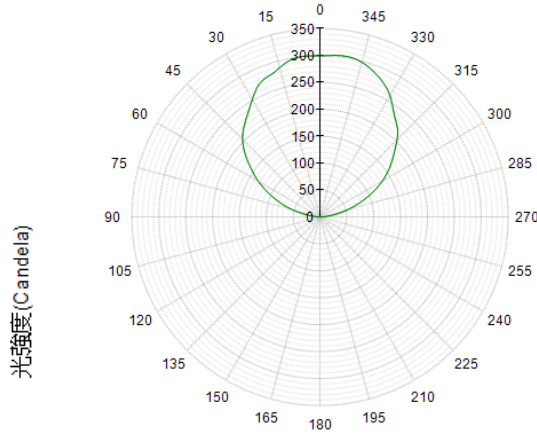
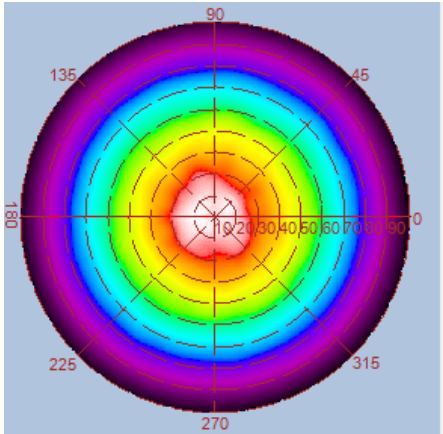


Height	E Avg.	E Max.	Diameter
1.0M	147 Lx	334 Lx	305 cm
2.0M	35 Lx	77 Lx	610 cm
3.0M	15 Lx	34 Lx	915 cm
4.0M	8 Lx	18 Lx	1220 cm
5.0M	5 Lx	12 Lx	1525 cm

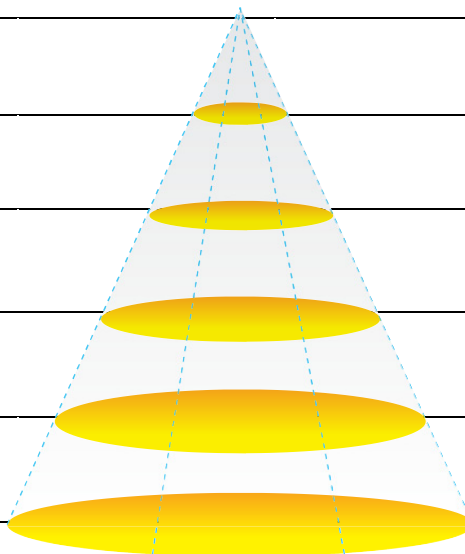


Luminous Intensity Distribution Diagram

GL-DL06-IP -CW/ CCT: 6000K

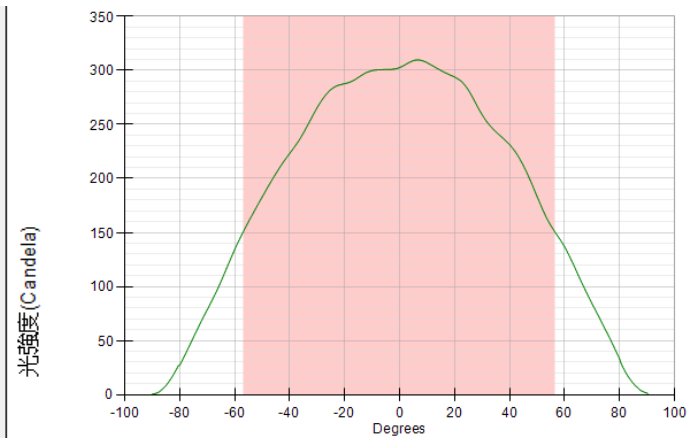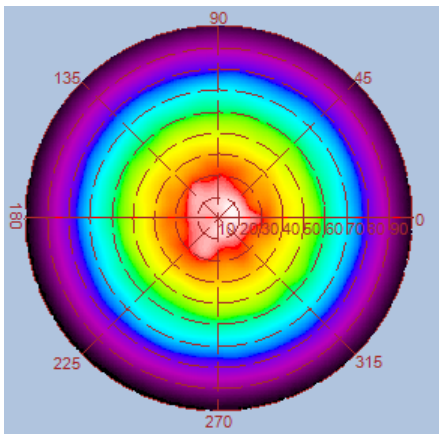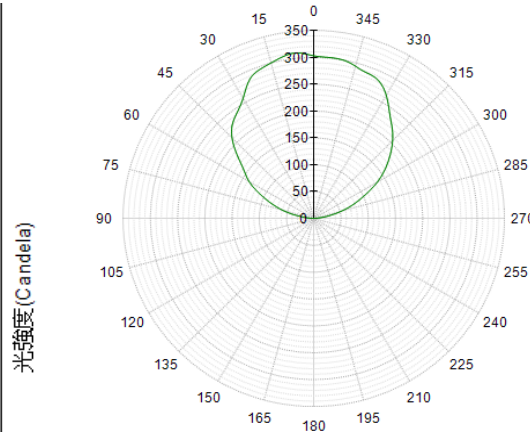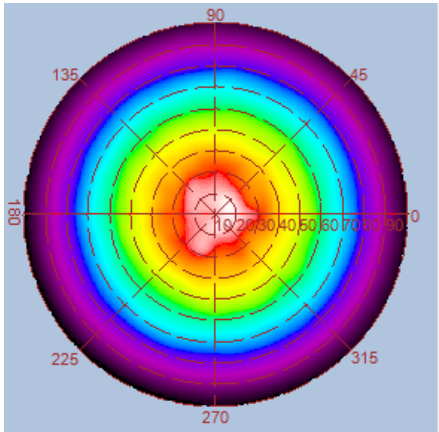

Height	E Avg.	E Max.	Diameter
1.0M	150 Lx	338 Lx	305 cm
2.0M	36 Lx	79 Lx	610 cm
3.0M	15 Lx	34 Lx	915 cm
4.0M	8 Lx	19 Lx	1220 cm
5.0M	5 Lx	12 Lx	1525 cm

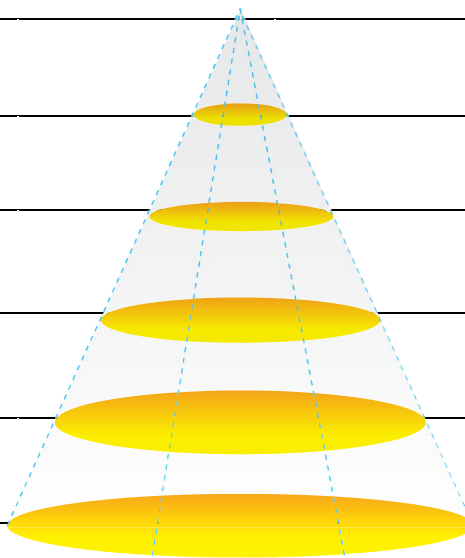

Photograph



GlacialLight GL-DL06-IP
• Waterproof (IP54)



GlacialLight GL-DL06-IP
• Waterproof (IP54)