




Operator
Telephone
Fax
e-Mail

GLACIALTECH, INC. DL08-SM-NW-4000K-110D / Luminaire Data Sheet

Luminous emittance 1:

See our luminaire catalog for an image of the luminaire.

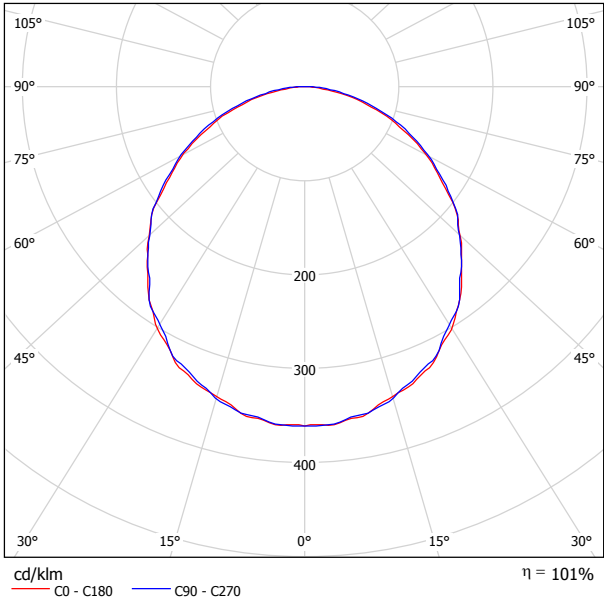

Luminaire classification according to CIE: 100
CIE flux code: 48 79 96 100 102

Luminous emittance 1:


Glare Evaluation According to UGR												
p Ceiling		70	70	50	50	30	70	70	50	50	30	
p Walls		50	30	50	30	30	50	30	50	30	30	
p Floor		20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis					
2H	2H	18.9	20.2	19.2	20.4	20.6	19.0	20.3	19.3	20.5	20.8	
	3H	20.2	21.4	20.5	21.6	21.9	20.4	21.6	20.7	21.8	22.1	
	4H	20.6	21.7	21.0	22.0	22.3	20.9	22.0	21.2	22.3	22.5	
	6H	20.9	21.9	21.2	22.2	22.5	21.2	22.2	21.5	22.5	22.8	
	8H	20.9	21.9	21.3	22.2	22.6	21.3	22.3	21.6	22.6	22.9	
4H	12H	20.9	21.9	21.3	22.2	22.5	21.3	22.3	21.7	22.6	22.9	
	2H	19.5	20.6	19.8	20.9	21.2	19.6	20.7	19.9	21.0	21.3	
	3H	20.9	21.9	21.3	22.2	22.6	21.1	22.1	21.5	22.4	22.8	
	4H	21.5	22.4	21.9	22.7	23.1	21.8	22.6	22.2	23.0	23.3	
	6H	21.8	22.6	22.3	23.0	23.4	22.2	22.9	22.6	23.3	23.7	
8H	8H	21.9	22.6	22.4	23.0	23.4	22.3	23.0	22.8	23.4	23.8	
	12H	21.9	22.6	22.4	23.0	23.4	22.4	23.0	22.8	23.4	23.8	
	4H	21.7	22.4	22.2	22.8	23.2	22.0	22.6	22.4	23.0	23.5	
	6H	22.2	22.7	22.6	23.2	23.6	22.5	23.1	23.0	23.5	23.9	
	8H	22.3	22.8	22.8	23.2	23.7	22.7	23.2	23.2	23.6	24.1	
12H	12H	22.3	22.8	22.8	23.2	23.7	22.8	23.2	23.3	23.7	24.2	
	4H	21.8	22.4	22.2	22.8	23.2	22.0	22.6	22.4	23.0	23.4	
	6H	22.2	22.7	22.7	23.2	23.6	22.5	23.0	23.0	23.5	23.9	
8H	8H	22.3	22.8	22.8	23.2	23.7	22.7	23.2	23.2	23.6	24.1	
	12H	22.3	22.8	22.8	23.2	23.7	22.8	23.2	23.3	23.7	24.2	
Variation of the observer position for the luminaire distances S												
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2					
S = 1.5H		+0.3 / -0.5					+0.2 / -0.4					
S = 2.0H		+0.6 / -0.9					+0.5 / -0.8					
Standard table		BK04					BK05					
Correction Summand		4.6					5.4					
Corrected Glare Indices referring to 1150lm Total Luminous Flux												



Operator
Telephone
Fax
e-Mail

GLACIALTECH, INC. DL08-SM-NW-4000K-110D / LDC (Polar)

Luminaire: GLACIALTECH, INC. DL08-SM-NW-4000K-110D
Lamps: 1 x Downlight

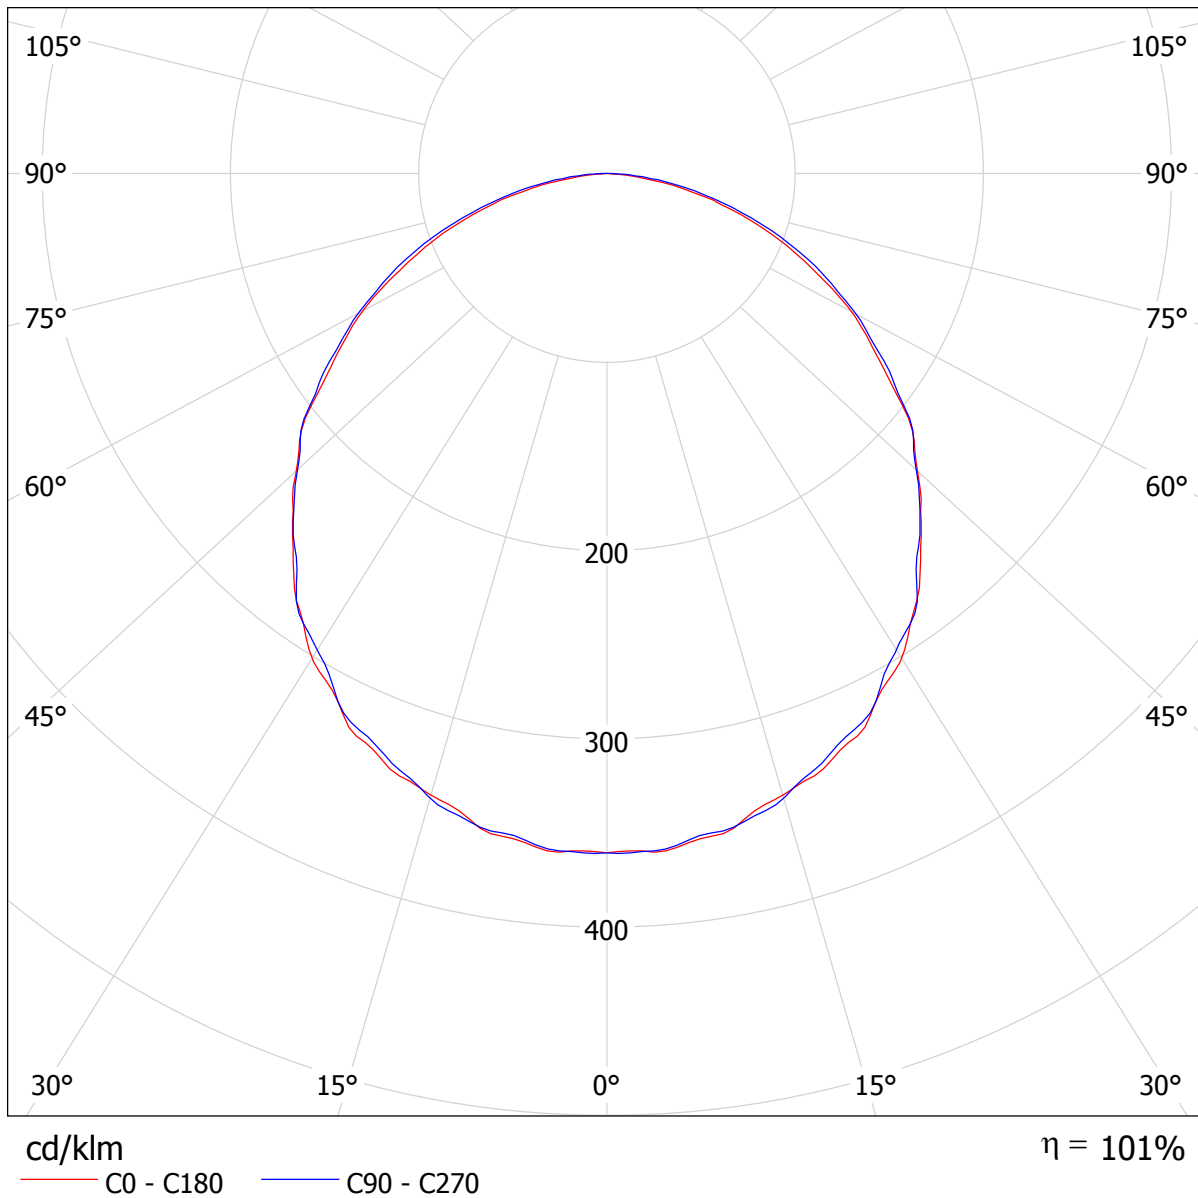




Operator
Telephone
Fax
e-Mail

GLACIALTECH, INC. DL08-SM-NW-4000K-110D / LDC (Linear)

Luminaire: GLACIALTECH, INC. DL08-SM-NW-4000K-110D
Lamps: 1 x Downlight

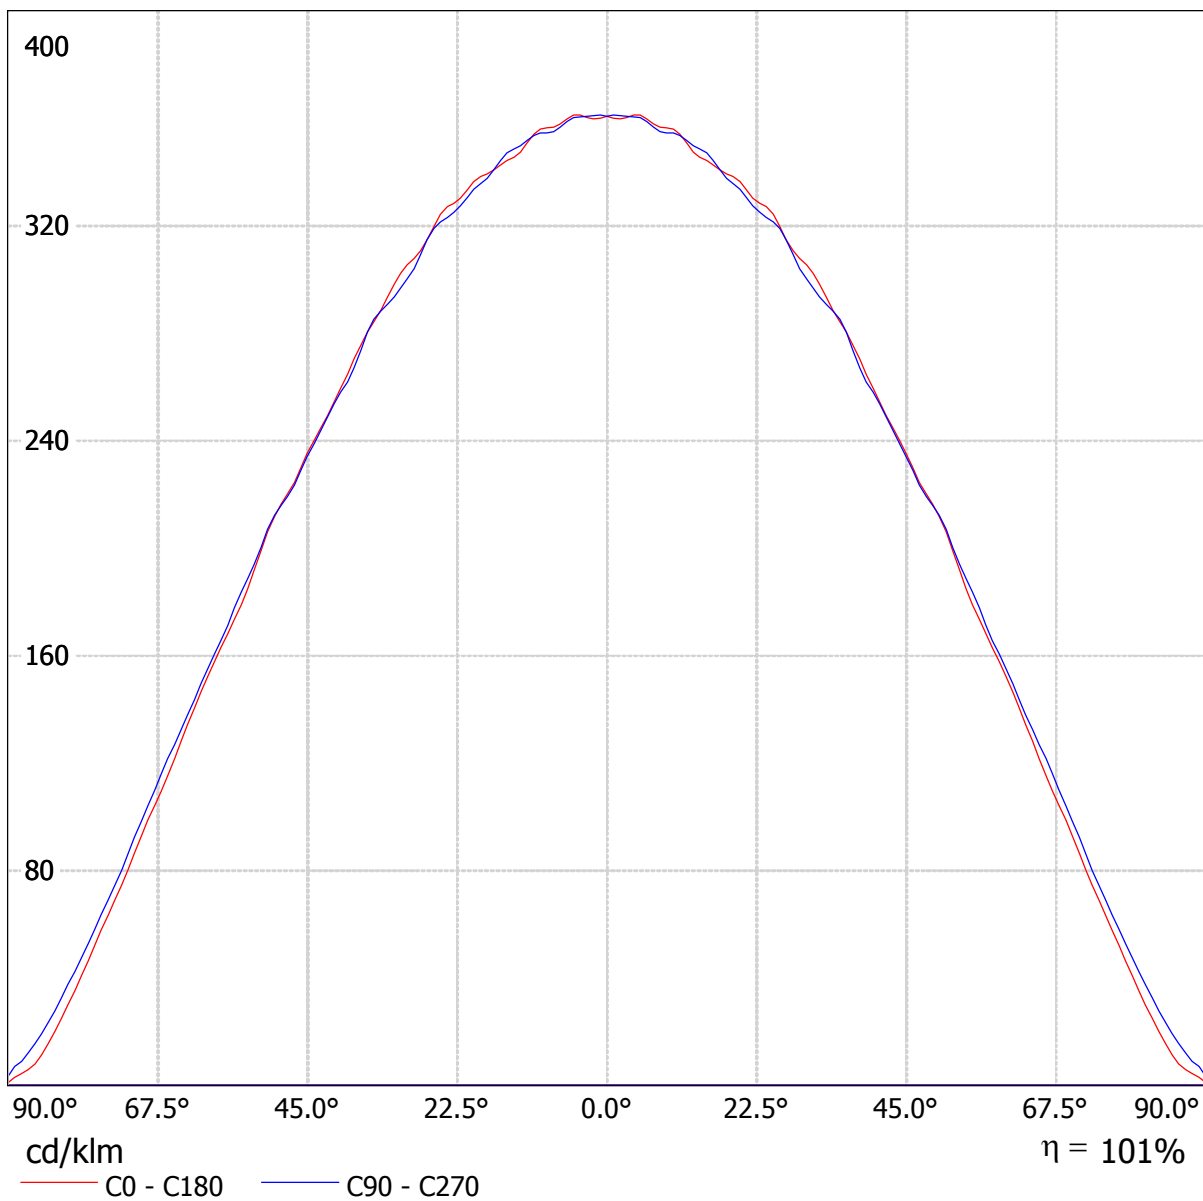



Operator
Telephone
Fax
e-Mail

GLACIALTECH, INC. DL08-SM-NW-4000K-110D / UGR-Table

Luminaire: GLACIALTECH, INC. DL08-SM-NW-4000K-110D

Lamps: 1 x Downlight

Glare Evaluation According to UGR											
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	18.9	20.2	19.2	20.4	20.6	19.0	20.3	19.3	20.5	20.8
	3H	20.2	21.4	20.5	21.6	21.9	20.4	21.6	20.7	21.8	22.1
	4H	20.6	21.7	21.0	22.0	22.3	20.9	22.0	21.2	22.3	22.5
	6H	20.9	21.9	21.2	22.2	22.5	21.2	22.2	21.5	22.5	22.8
	8H	20.9	21.9	21.3	22.2	22.6	21.3	22.3	21.6	22.6	22.9
	12H	20.9	21.9	21.3	22.2	22.5	21.3	22.3	21.7	22.6	22.9
4H	2H	19.5	20.6	19.8	20.9	21.2	19.6	20.7	19.9	21.0	21.3
	3H	20.9	21.9	21.3	22.2	22.6	21.1	22.1	21.5	22.4	22.8
	4H	21.5	22.4	21.9	22.7	23.1	21.8	22.6	22.2	23.0	23.3
	6H	21.8	22.6	22.3	23.0	23.4	22.2	22.9	22.6	23.3	23.7
	8H	21.9	22.6	22.4	23.0	23.4	22.3	23.0	22.8	23.4	23.8
	12H	21.9	22.6	22.4	23.0	23.4	22.4	23.0	22.8	23.4	23.8
8H	4H	21.7	22.4	22.2	22.8	23.2	22.0	22.6	22.4	23.0	23.5
	6H	22.2	22.7	22.6	23.2	23.6	22.5	23.1	23.0	23.5	23.9
	8H	22.3	22.8	22.8	23.2	23.7	22.7	23.2	23.2	23.6	24.1
	12H	22.3	22.8	22.8	23.2	23.7	22.8	23.2	23.3	23.7	24.2
12H	4H	21.8	22.4	22.2	22.8	23.2	22.0	22.6	22.4	23.0	23.4
	6H	22.2	22.7	22.7	23.2	23.6	22.5	23.0	23.0	23.5	23.9
	8H	22.3	22.8	22.8	23.2	23.7	22.7	23.2	23.2	23.6	24.1
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.2					+0.1 / -0.2				
S = 1.5H		+0.3 / -0.5					+0.2 / -0.4				
S = 2.0H		+0.6 / -0.9					+0.5 / -0.8				
Standard table		BK04					BK05				
Correction Summand		4.6					5.4				
Corrected Glare Indices referring to 1150lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.



Operator
Telephone
Fax
e-Mail

GLACIALTECH, INC. DL08-SM-NW-4000K-110D / Glare Data Sheet

Luminaire: GLACIALTECH, INC.
DL08-SM-NW-4000K-110D

Lamps: 1 x Downlight

Glare Evaluation According to UGR

ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	18.9	20.2	19.2	20.4	20.6	19.0	20.3	19.3	20.5	20.8
	3H	20.2	21.4	20.5	21.6	21.9	20.4	21.6	20.7	21.8	22.1
	4H	20.6	21.7	21.0	22.0	22.3	20.9	22.0	21.2	22.3	22.5
	6H	20.9	21.9	21.2	22.2	22.5	21.2	22.2	21.5	22.5	22.8
	8H	20.9	21.9	21.3	22.2	22.6	21.3	22.3	21.6	22.6	22.9
	12H	20.9	21.9	21.3	22.2	22.5	21.3	22.3	21.7	22.6	22.9
4H	2H	19.5	20.6	19.8	20.9	21.2	19.6	20.7	19.9	21.0	21.3
	3H	20.9	21.9	21.3	22.2	22.6	21.1	22.1	21.5	22.4	22.8
	4H	21.5	22.4	21.9	22.7	23.1	21.8	22.6	22.2	23.0	23.3
	6H	21.8	22.6	22.3	23.0	23.4	22.2	22.9	22.6	23.3	23.7
	8H	21.9	22.6	22.4	23.0	23.4	22.3	23.0	22.8	23.4	23.8
	12H	21.9	22.6	22.4	23.0	23.4	22.4	23.0	22.8	23.4	23.8
8H	4H	21.7	22.4	22.2	22.8	23.2	22.0	22.6	22.4	23.0	23.5
	6H	22.2	22.7	22.6	23.2	23.6	22.5	23.1	23.0	23.5	23.9
	8H	22.3	22.8	22.8	23.2	23.7	22.7	23.2	23.2	23.6	24.1
	12H	22.3	22.8	22.8	23.2	23.7	22.8	23.2	23.3	23.7	24.2
12H	4H	21.8	22.4	22.2	22.8	23.2	22.0	22.6	22.4	23.0	23.4
	6H	22.2	22.7	22.7	23.2	23.6	22.5	23.0	23.0	23.5	23.9
	8H	22.3	22.8	22.8	23.2	23.7	22.7	23.2	23.2	23.6	24.1
Variation of the observer position for the luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+0.1 / -0.2 +0.3 / -0.5 +0.6 / -0.9					+0.1 / -0.2 +0.2 / -0.4 +0.5 / -0.8				
Standard table		BK04					BK05				
Correction Summand		4.6					5.4				
Corrected Glare Indices referring to 1150lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

