

GL-AR111-V2 LED Lighting Installation Guidelines

Photograph	Description
	<p>燈具 1 Fixture 1</p>
	<p>鬆脫 M4 螺絲。 Loosen the M4 Screw.</p>
	<p>將 PIN 置於燈具底座內。 Place the PIN into the lamp set.</p>



使用 M4 螺絲，如圖所示,確認螺絲定位於燈具與 AR111。

Install the M4 screws back to the lamp set. (see diagram)



將固定彈片對位置入。

Place the retention spring into the lamp set.




完成。

Completed.

	<p>燈具 2 Fixture 2</p>
	<p>將 Driver 輸出端，連接 AR111 PIN。 Connect the output of the driver to the PIN of AR111.</p> 
	<p>將 AR111 置於燈具內。 Place the lamp into the casing.</p>

	<p>將固定彈片確認定位。</p> <p>Place the retention spring on to the lamp set.</p>
	<p>完成。</p> <p>Completed.</p>

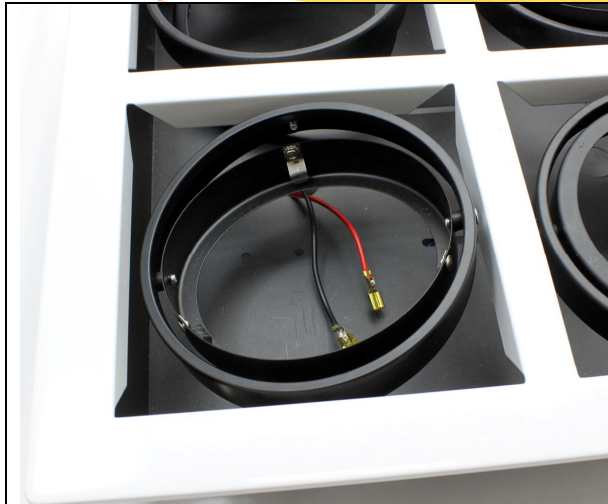

燈具 3


Fixture 3




將 AR111 如圖所示之方向置於燈具內。
Put the AR111 facing down to the lamp set.



確認彈片固定 AR111 不脫落。
Make sure the retention spring is holding the lamp, and the AR111 sits firmly in the lamp set.

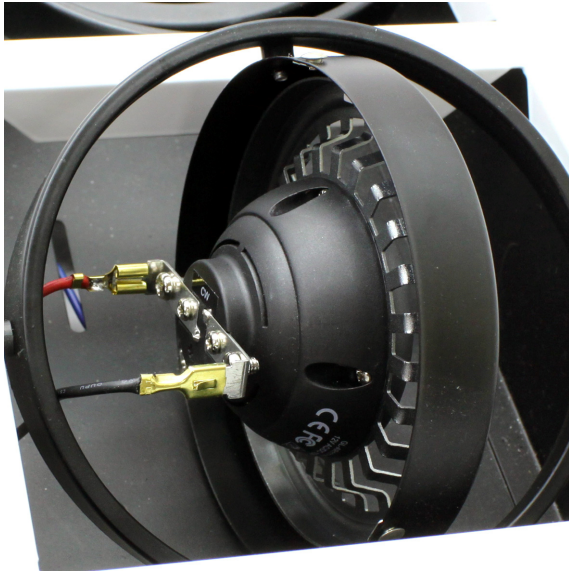

將 Driver 輸出端，連接 AR111 PIN。
Connect the output of the driver to the PIN of AR111.

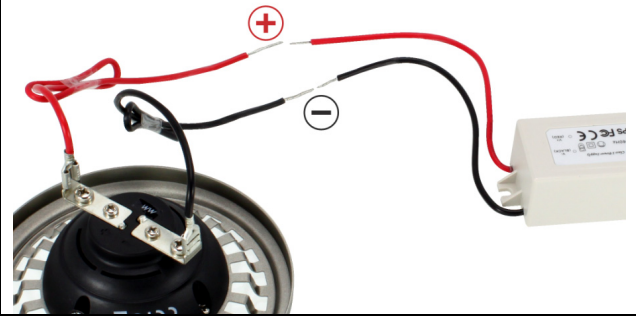

完成。
Completed.