

# LED Down Light High Color Quality, CRI Min. 90 GL-DL04LD Series DC Input

Bundled Driver :  
GP-LD10-30C



## Features




- CRI (Minimum) 90.
- CQS (Typ.) 93.
- TM-30-15 Rf (Typ.) 92.
- TM-30-15 Rg (Typ.) 100.
- DC input, for indoor applications.
- 7.5W energy consumption.
- Energy efficient and preventing possible energy waste.
- All-in-one bulb and fixture.
- Directly compatible with 12V and 24V solar panels.
- Slim, compact and fashionable design.
- Very low power consumption.
- No UV or IR radiation.
- Bundled driver with OVP/SCP/UVLO functions.
- Passed IEC 60598-1(2008) 、 IEC 60695-2-11; 850°C glow wire test. (optional)



## Specifications


Type	GL-DL04LD-WW
Energy Used	7.5 W
Rated Life	30,000 Hours
Input Voltage	11-15V DC / 22-30V DC
CCT (color)	3000K
Luminous Flux	410 lm
System Efficacy	55 lm/W
CRI (Minimum)	90
CQS (Typ.)	93
TM-30-15 Rf (Typ.)	92
TM-30-15 Rg (Typ.)	100
Beam Angle	110°
Dimension	Φ 114 x 13mm
IP Rating	IP40
Operation Temperature	-20°C ~ +40°C
Bundled Driver	GP-LD10-30C (Driver Output: Constant Current 350mA, 30V)
Net. Weight	220 g (with driver)
Package	20 Boxes / Carton
Fixture Hole	Φ 100 mm

## Outline / Dimension

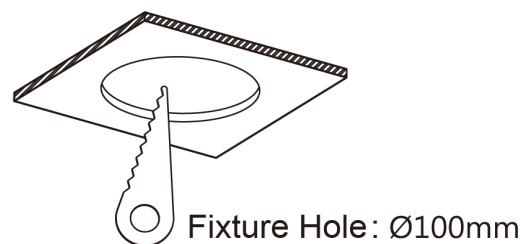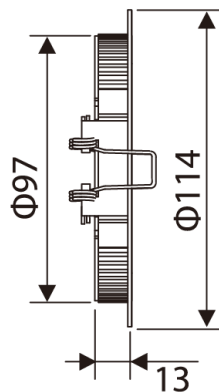
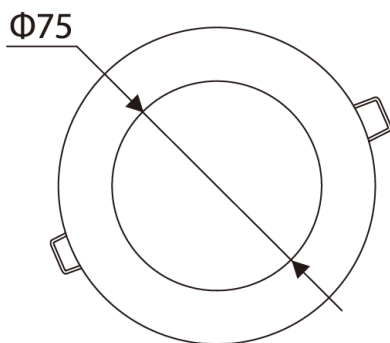


# Luminous Intensity Distribution Diagram


GL-DL04 – WW /CCT : 3000K

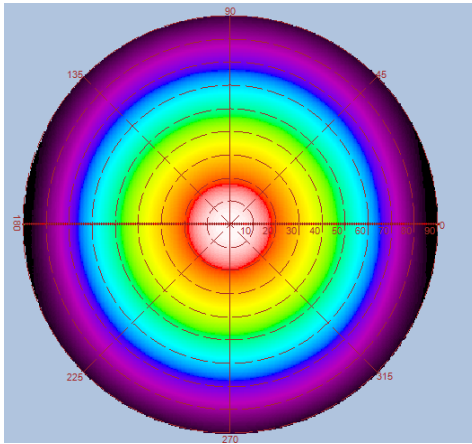

光强度 (Candela)

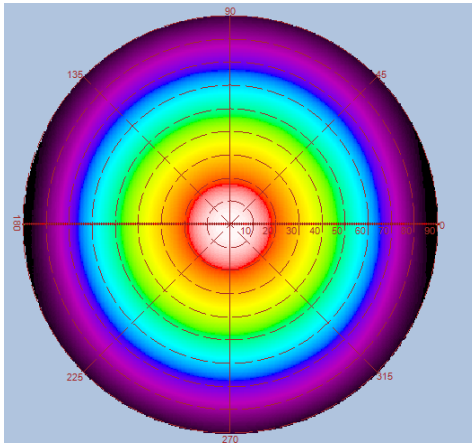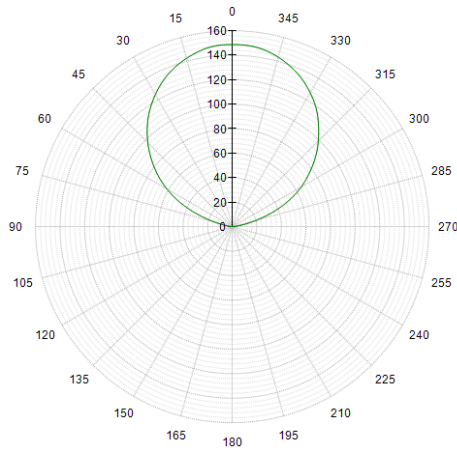

光强度 (Candela)

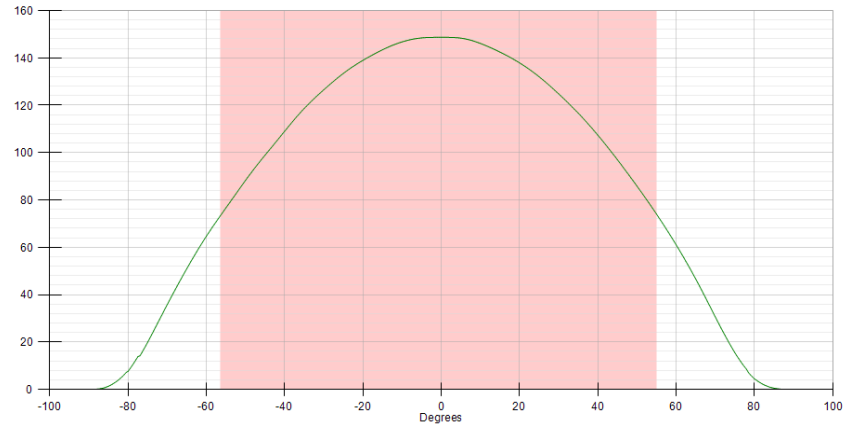

Height	E Avg.	E Max.	Diameter
1.0M	204 Lx	206 Lx	293 cm
2.0M	46 Lx	48 Lx	587 cm
3.0M	19 Lx	20 Lx	881 cm
4.0M	10 Lx	11 Lx	1174 cm
5.0M	6 Lx	7 Lx	1468 cm

