

<http://www.glaciallight.com>


7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City, Taiwan, 235, R.O.C.

Operator  
 Telephone +886 2 2244-1227  
 Fax +886 2 2244-1241  
 e-Mail sales@GlacialLight.com

## GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade / Luminaire Data Sheet

### Luminous emittance 1:

See our luminaire catalog for an image of the luminaire.

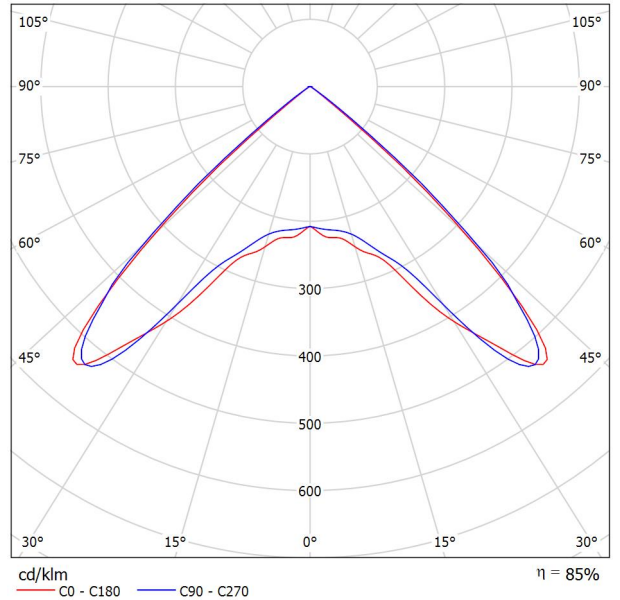

Luminaire classification according to CIE: 100  
 CIE flux code: 66 99 100 100 85

### Luminous emittance 1:

| Glare Evaluation According to UGR                                |  |      |      |      |      |   |      |      |      |      |      |
|--|--|------|------|------|------|---|------|------|------|------|------|
| ρ Ceiling  | 70   | 70   | 50   | 50   | 30   | 70                                      | 70   | 50   | 50   | 30   |      |
| ρ Walls  | 50   | 30   | 50   | 30   | 30   | 50                                      | 30   | 50   | 30   | 30   |      |
| ρ Floor  | 20   | 20   | 20   | 20   | 20   | 20                                      | 20   | 20   | 20   | 20   |      |
| Room Size X Y  | Viewing direction at right angles to lamp axis |      |      |      |      | Viewing direction parallel to lamp axis |      |      |      |      |      |
| 2H   | 2H   | 21.8 | 22.9 | 22.1 | 23.1 | 23.3                                    | 21.7 | 22.8 | 22.0 | 23.0 | 23.2 |
|  | 3H   | 21.7 | 22.6 | 22.0 | 22.8 | 23.1                                    | 21.6 | 22.5 | 21.9 | 22.7 | 23.0 |
|  | 4H   | 21.6 | 22.5 | 21.9 | 22.7 | 23.0                                    | 21.5 | 22.4 | 21.8 | 22.6 | 22.9 |
|  | 6H   | 21.5 | 22.3 | 21.9 | 22.6 | 22.9                                    | 21.4 | 22.2 | 21.8 | 22.5 | 22.8 |
|  | 8H   | 21.5 | 22.2 | 21.8 | 22.5 | 22.8                                    | 21.4 | 22.1 | 21.8 | 22.4 | 22.8 |
| 4H   | 2H   | 21.5 | 22.2 | 21.8 | 22.5 | 22.8                                    | 21.4 | 22.1 | 21.7 | 22.4 | 22.7 |
|  | 3H   | 21.5 | 22.2 | 21.8 | 22.5 | 22.8                                    | 21.4 | 22.1 | 21.7 | 22.4 | 22.7 |
|  | 4H   | 21.4 | 22.0 | 21.8 | 22.3 | 22.7                                    | 21.3 | 21.9 | 21.7 | 22.3 | 22.6 |
|  | 6H   | 21.3 | 21.8 | 21.7 | 22.2 | 22.6                                    | 21.2 | 21.8 | 21.6 | 22.1 | 22.5 |
|  | 8H   | 21.3 | 21.8 | 21.7 | 22.1 | 22.6                                    | 21.2 | 21.7 | 21.6 | 22.1 | 22.5 |
| 8H   | 2H   | 21.2 | 21.7 | 21.7 | 22.1 | 22.5                                    | 21.2 | 21.6 | 21.6 | 22.0 | 22.4 |
|  | 4H   | 21.3 | 21.8 | 21.7 | 22.1 | 22.6                                    | 21.2 | 21.7 | 21.6 | 22.1 | 22.5 |
|  | 6H   | 21.2 | 21.6 | 21.7 | 22.0 | 22.5                                    | 21.1 | 21.5 | 21.6 | 21.9 | 22.4 |
|  | 8H   | 21.2 | 21.5 | 21.6 | 21.9 | 22.4                                    | 21.1 | 21.4 | 21.5 | 21.9 | 22.3 |
|  | 12H  | 21.1 | 21.4 | 21.6 | 21.9 | 22.4                                    | 21.0 | 21.3 | 21.5 | 21.8 | 22.3 |
| 12H  | 4H   | 21.2 | 21.7 | 21.7 | 22.1 | 22.5                                    | 21.2 | 21.6 | 21.6 | 22.0 | 22.4 |
|  | 6H   | 21.2 | 21.5 | 21.6 | 21.9 | 22.4                                    | 21.1 | 21.4 | 21.5 | 21.9 | 22.3 |
|  | 8H   | 21.1 | 21.4 | 21.6 | 21.9 | 22.4                                    | 21.0 | 21.3 | 21.5 | 21.8 | 22.3 |
| Variation of the observer position for the luminaire distances S |  |      |      |      |      |   |      |      |      |      |      |
| S = 1.0H   | +3.0 / -16.9                                   |      |      |      |      | +3.1 / -13.2                            |      |      |      |      |      |
| S = 1.5H   | +5.7 / -21.6                                   |      |      |      |      | +5.0 / -19.6                            |      |      |      |      |      |
| S = 2.0H   | +7.7 / -22.8                                   |      |      |      |      | +7.0 / -20.7                            |      |      |      |      |      |
| Standard table   | BK00   |      |      |      |      | BK00                                    |      |      |      |      |      |
| Correction Summand   | 2.7  |      |      |      |      | 2.6                                     |      |      |      |      |      |
| Corrected Glare Indices referring to 1650lm Total Luminous Flux  |  |      |      |      |      |   |      |      |      |      |      |


<http://www.glaciallight.com>

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,  
Taiwan, 235, R.O.C.

Operator  
Telephone +886 2 2244-1227  
Fax +886 2 2244-1241  
e-Mail [sales@GlacialLight.com](mailto:sales@GlacialLight.com)

### GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade / LDC (Polar)

Luminaire: GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade  
Lamps: 1 x Flood Light

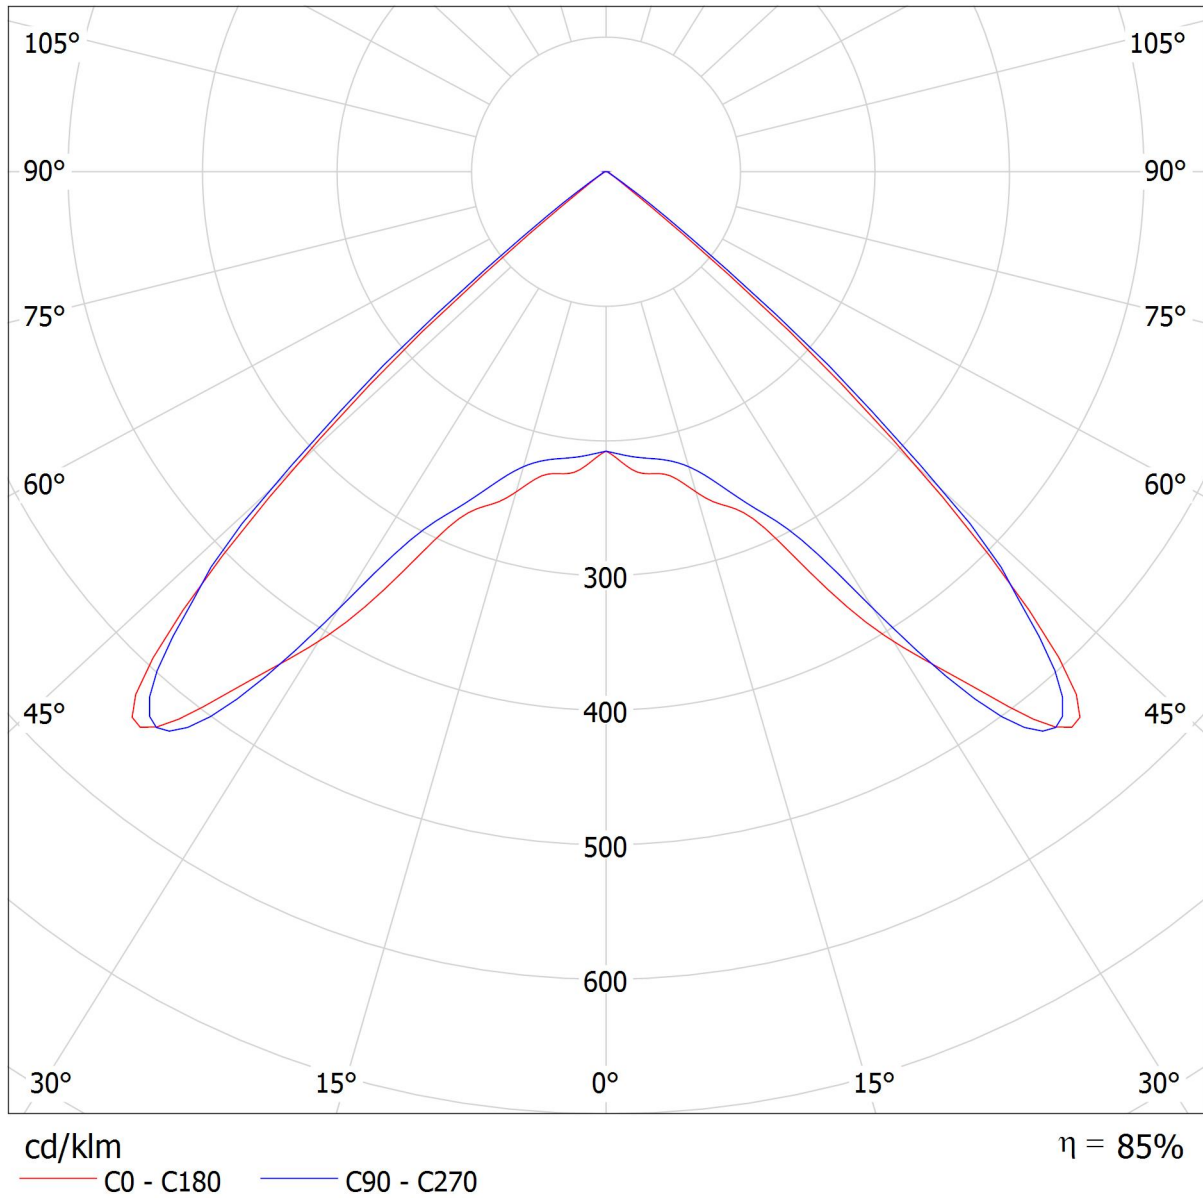


<http://www.glaciallight.com>

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,  
Taiwan, 235, R.O.C.

Operator  
Telephone +886 2 2244-1227  
Fax +886 2 2244-1241  
e-Mail [sales@GlacialLight.com](mailto:sales@GlacialLight.com)

### GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade / LDC (Linear)

Luminaire: GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade  
Lamps: 1 x Flood Light

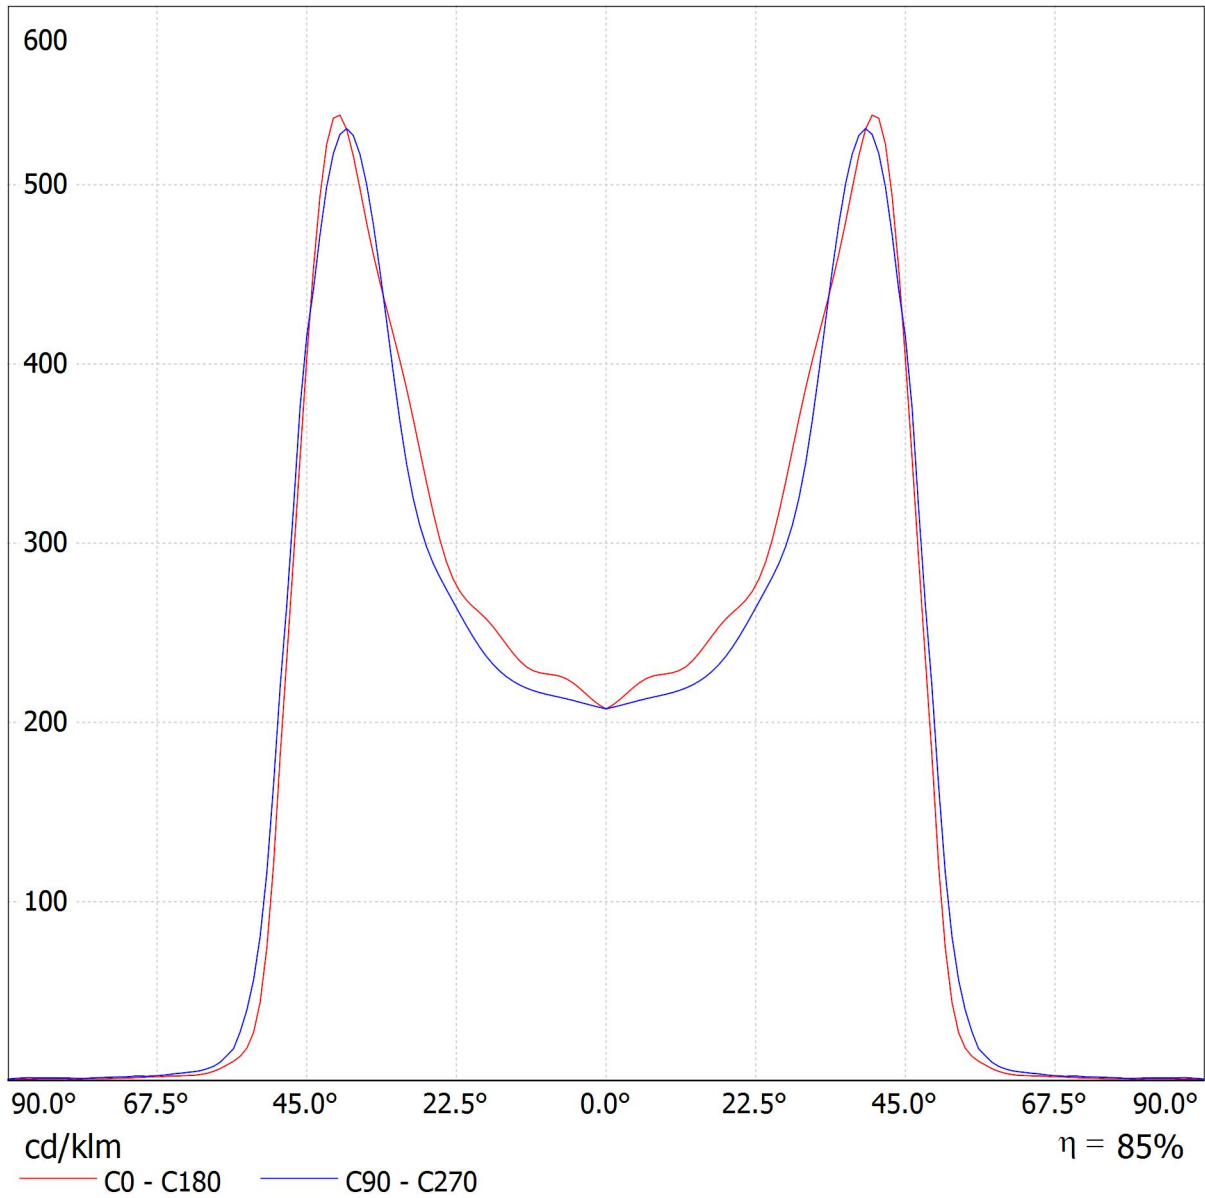

http://www.glaciallight.com

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City, Taiwan, 235, R.O.C.

Operator  
Telephone +886 2 2244-1227  
Fax +886 2 2244-1241  
e-Mail sales@GlacialLight.com

## GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade / UGR-Table

Luminaire: GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade  
Lamps: 1 x Flood Light

| <b>Glare Evaluation According to UGR</b>                         |     |   |      |      |      |      |  |      |      |      |      |
|--|-----|---|------|------|------|------|--|------|------|------|------|
| ρ Ceiling  |     | 70  | 70   | 50   | 50   | 30   | 70   | 70   | 50   | 50   | 30   |
| ρ Walls  |     | 50  | 30   | 50   | 30   | 30   | 50   | 30   | 50   | 30   | 30   |
| ρ Floor  |     | 20  | 20   | 20   | 20   | 20   | 20   | 20   | 20   | 20   | 20   |
| Room Size<br>X      Y  |     | Viewing direction at right angles<br>to lamp axis |      |      |      |      | Viewing direction parallel<br>to lamp axis |      |      |      |      |
| 2H   | 2H  | 21.8  | 22.9 | 22.1 | 23.1 | 23.3 | 21.7                                       | 22.8 | 22.0 | 23.0 | 23.2 |
|  | 3H  | 21.7  | 22.6 | 22.0 | 22.8 | 23.1 | 21.6                                       | 22.5 | 21.9 | 22.7 | 23.0 |
|  | 4H  | 21.6  | 22.5 | 21.9 | 22.7 | 23.0 | 21.5                                       | 22.4 | 21.8 | 22.6 | 22.9 |
|  | 6H  | 21.5  | 22.3 | 21.9 | 22.6 | 22.9 | 21.4                                       | 22.2 | 21.8 | 22.5 | 22.8 |
|  | 8H  | 21.5  | 22.2 | 21.8 | 22.5 | 22.8 | 21.4                                       | 22.1 | 21.8 | 22.4 | 22.8 |
|  | 12H | 21.5  | 22.2 | 21.8 | 22.5 | 22.8 | 21.4                                       | 22.1 | 21.7 | 22.4 | 22.7 |
| 4H   | 2H  | 21.6  | 22.5 | 21.9 | 22.7 | 23.0 | 21.5                                       | 22.4 | 21.8 | 22.6 | 22.9 |
|  | 3H  | 21.5  | 22.2 | 21.8 | 22.5 | 22.8 | 21.4                                       | 22.1 | 21.7 | 22.4 | 22.7 |
|  | 4H  | 21.4  | 22.0 | 21.8 | 22.3 | 22.7 | 21.3                                       | 21.9 | 21.7 | 22.3 | 22.6 |
|  | 6H  | 21.3  | 21.8 | 21.7 | 22.2 | 22.6 | 21.2                                       | 21.8 | 21.6 | 22.1 | 22.5 |
|  | 8H  | 21.3  | 21.8 | 21.7 | 22.1 | 22.6 | 21.2                                       | 21.7 | 21.6 | 22.1 | 22.5 |
|  | 12H | 21.2  | 21.7 | 21.7 | 22.1 | 22.5 | 21.2                                       | 21.6 | 21.6 | 22.0 | 22.4 |
| 8H   | 4H  | 21.3  | 21.8 | 21.7 | 22.1 | 22.6 | 21.2                                       | 21.7 | 21.6 | 22.1 | 22.5 |
|  | 6H  | 21.2  | 21.6 | 21.7 | 22.0 | 22.5 | 21.1                                       | 21.5 | 21.6 | 21.9 | 22.4 |
|  | 8H  | 21.2  | 21.5 | 21.6 | 21.9 | 22.4 | 21.1                                       | 21.4 | 21.5 | 21.9 | 22.3 |
|  | 12H | 21.1  | 21.4 | 21.6 | 21.9 | 22.4 | 21.0                                       | 21.3 | 21.5 | 21.8 | 22.3 |
| 12H  | 4H  | 21.2  | 21.7 | 21.7 | 22.1 | 22.5 | 21.2                                       | 21.6 | 21.6 | 22.0 | 22.4 |
|  | 6H  | 21.2  | 21.5 | 21.6 | 21.9 | 22.4 | 21.1                                       | 21.4 | 21.5 | 21.9 | 22.3 |
|  | 8H  | 21.1  | 21.4 | 21.6 | 21.9 | 22.4 | 21.0                                       | 21.3 | 21.5 | 21.8 | 22.3 |
| Variation of the observer position for the luminaire distances S |     |   |      |      |      |      |  |      |      |      |      |
| S = 1.0H   |     | +3.0 / -16.9                                      |      |      |      |      | +3.1 / -13.2                               |      |      |      |      |
| S = 1.5H   |     | +5.7 / -21.6                                      |      |      |      |      | +5.0 / -19.6                               |      |      |      |      |
| S = 2.0H   |     | +7.7 / -22.8                                      |      |      |      |      | +7.0 / -20.7                               |      |      |      |      |
| Standard table   |     | BK00  |      |      |      |      | BK00                                       |      |      |      |      |
| Correction Summand   |     | 2.7   |      |      |      |      | 2.6  |      |      |      |      |
| Corrected Glare Indices referring to 1650lm Total Luminous Flux  |     |   |      |      |      |      |  |      |      |      |      |

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

http://www.glaciallight.com

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City, Taiwan, 235, R.O.C.

Operator  
 Telephone +886 2 2244-1227  
 Fax +886 2 2244-1241  
 e-Mail sales@GlacialLight.com

## GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade / Glare Data Sheet

Luminaire: GlacialLight GL-FL15-NW-4000K-120D Lens-no lampshade

Lamps: 1 x Flood Light

| Glare Evaluation According to UGR                                |              |  |      |      |      |              |   |      |      |      |      |
|--|--------------|--|------|------|------|--------------|---|------|------|------|------|
| ρ Ceiling  | 70           | 70   | 50   | 50   | 30   | 70           | 70                                      | 50   | 50   | 30   |      |
| ρ Walls  | 50           | 30   | 50   | 30   | 30   | 50           | 30                                      | 50   | 30   | 30   |      |
| ρ Floor  | 20           | 20   | 20   | 20   | 20   | 20           | 20                                      | 20   | 20   | 20   |      |
| Room Size X Y  |              | Viewing direction at right angles to lamp axis |      |      |      |              | Viewing direction parallel to lamp axis |      |      |      |      |
| 2H   | 2H           | 21.8   | 22.9 | 22.1 | 23.1 | 23.3         | 21.7                                    | 22.8 | 22.0 | 23.0 | 23.2 |
|  | 3H           | 21.7   | 22.6 | 22.0 | 22.8 | 23.1         | 21.6                                    | 22.5 | 21.9 | 22.7 | 23.0 |
|  | 4H           | 21.6   | 22.5 | 21.9 | 22.7 | 23.0         | 21.5                                    | 22.4 | 21.8 | 22.6 | 22.9 |
|  | 6H           | 21.5   | 22.3 | 21.9 | 22.6 | 22.9         | 21.4                                    | 22.2 | 21.8 | 22.5 | 22.8 |
|  | 8H           | 21.5   | 22.2 | 21.8 | 22.5 | 22.8         | 21.4                                    | 22.1 | 21.8 | 22.4 | 22.8 |
|  | 12H          | 21.5   | 22.2 | 21.8 | 22.5 | 22.8         | 21.4                                    | 22.1 | 21.7 | 22.4 | 22.7 |
| 4H   | 2H           | 21.6   | 22.5 | 21.9 | 22.7 | 23.0         | 21.5                                    | 22.4 | 21.8 | 22.6 | 22.9 |
|  | 3H           | 21.5   | 22.2 | 21.8 | 22.5 | 22.8         | 21.4                                    | 22.1 | 21.7 | 22.4 | 22.7 |
|  | 4H           | 21.4   | 22.0 | 21.8 | 22.3 | 22.7         | 21.3                                    | 21.9 | 21.7 | 22.3 | 22.6 |
|  | 6H           | 21.3   | 21.8 | 21.7 | 22.2 | 22.6         | 21.2                                    | 21.8 | 21.6 | 22.1 | 22.5 |
|  | 8H           | 21.3   | 21.8 | 21.7 | 22.1 | 22.6         | 21.2                                    | 21.7 | 21.6 | 22.1 | 22.5 |
|  | 12H          | 21.2   | 21.7 | 21.7 | 22.1 | 22.5         | 21.2                                    | 21.6 | 21.6 | 22.0 | 22.4 |
| 8H   | 4H           | 21.3   | 21.8 | 21.7 | 22.1 | 22.6         | 21.2                                    | 21.7 | 21.6 | 22.1 | 22.5 |
|  | 6H           | 21.2   | 21.6 | 21.7 | 22.0 | 22.5         | 21.1                                    | 21.5 | 21.6 | 21.9 | 22.4 |
|  | 8H           | 21.2   | 21.5 | 21.6 | 21.9 | 22.4         | 21.1                                    | 21.4 | 21.5 | 21.9 | 22.3 |
|  | 12H          | 21.1   | 21.4 | 21.6 | 21.9 | 22.4         | 21.0                                    | 21.3 | 21.5 | 21.8 | 22.3 |
| 12H  | 4H           | 21.2   | 21.7 | 21.7 | 22.1 | 22.5         | 21.2                                    | 21.6 | 21.6 | 22.0 | 22.4 |
|  | 6H           | 21.2   | 21.5 | 21.6 | 21.9 | 22.4         | 21.1                                    | 21.4 | 21.5 | 21.9 | 22.3 |
|  | 8H           | 21.1   | 21.4 | 21.6 | 21.9 | 22.4         | 21.0                                    | 21.3 | 21.5 | 21.8 | 22.3 |
| Variation of the observer position for the luminaire distances S |              |  |      |      |      |              |   |      |      |      |      |
| S = 1.0H   | +3.0 / -16.9 |  |      |      |      | +3.1 / -13.2 |   |      |      |      |      |
| S = 1.5H   | +5.7 / -21.6 |  |      |      |      | +5.0 / -19.6 |   |      |      |      |      |
| S = 2.0H   | +7.7 / -22.8 |  |      |      |      | +7.0 / -20.7 |   |      |      |      |      |
| Standard table   | BK00         |  |      |      |      | BK00         |   |      |      |      |      |
| Correction Summand   | 2.7          |  |      |      |      | 2.6          |   |      |      |      |      |
| Corrected Glare Indices referring to 1650lm Total Luminous Flux  |              |  |      |      |      |              |   |      |      |      |      |

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

