

Installation Instructions for Panel Light-V2 Suspension Cables

Photograph	Description
	<p>Use the Power Drill to make a $\Phi 7 \times 40\text{mm}$ hole in the ceiling.</p> <p>使用電鑽在天花板鑽出 $\Phi 7 \times 40\text{mm}$ 的孔</p>
	<p>Gently use the hammer to fit screw holder into the hole drilled.</p> <p>再使用槌子將螺絲護套敲進剛才鑽的孔內</p>
	<p>One Panel Light-V2 calls for four suspension cables.</p> <p>一個面板燈使用四條鋼繩</p>



Unscrew the suspension cable holders from their anchors.

將鋼繩上固定座的螺栓鬆開




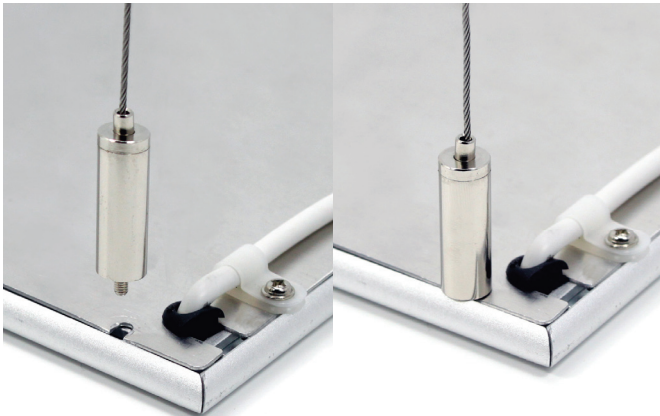
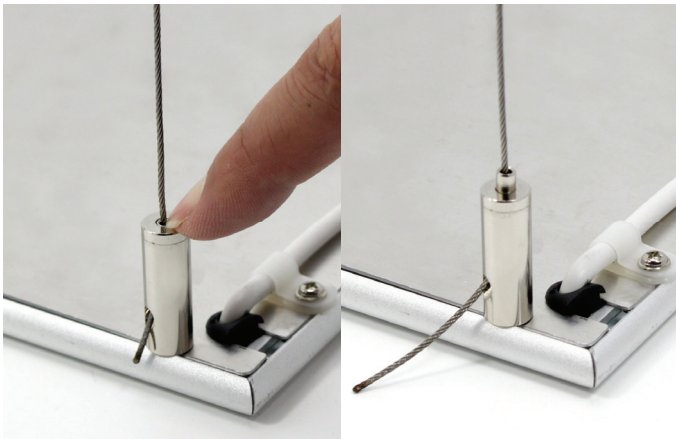
Use the M5 screws to fix the suspension cable holders and the screw holders together.

使用 M5 螺絲將固定座鎖在先前安裝的螺絲護套內



Screw the anchors to the suspension cable holders.

將卸下的螺栓鎖在固定座上

	<p>Place the Panel Light-V2 with the back facing up, and remove four screws depicted in the picture.</p> <p>將面板燈背面向上平放， 依序將圖上標示的 4 顆螺絲拆下</p>
	<p>Attach the other ends of the suspension cables to the Panel Light-V2.</p> <p>將鋼繩另一端的卡線器連接到 Panel Light-V2</p> <p>Tighten up the cable heads onto the Panel Light-V2.</p> <p>確實將卡線器鎖緊到面板燈螺絲孔內</p>
	<p>Adjust the cable length by pressing down on the cable button. When released, the cable will automatically lock at the desired length.</p> <p>按下卡線器上的鈕進行調整鋼繩長度。當放開鈕時，鋼繩將自動鎖定在所需的長度。</p>