

http://www.glaciallight.com


7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City, Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NW-4000K-38D-Lens / Luminaire Data Sheet

Luminous emittance 1:

See our luminaire catalog for an image of the luminaire.

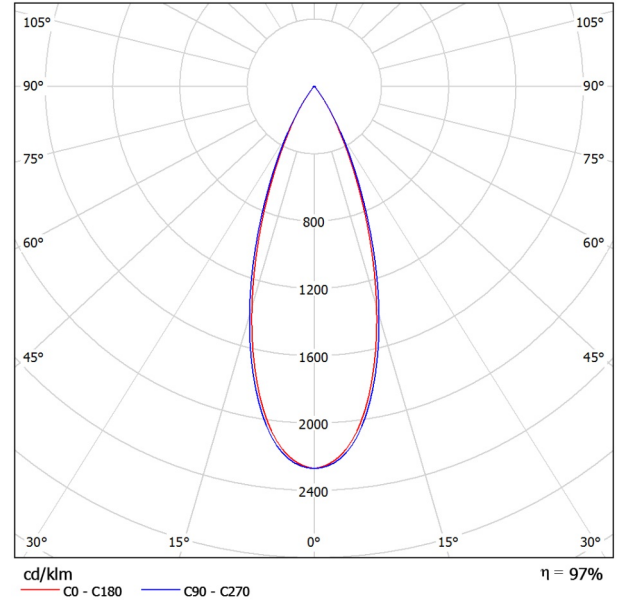

Luminaire classification according to CIE: 100
CIE flux code: 97 99 99 100 99

Luminous emittance 1:

| Glare Evaluation According to UGR | | | | | | | | | | | |
|---|--|-----|-----|-----|-----|---|-----|-----|-----|-----|-----|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size X Y | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | | |
| 2H | 2H | 7.6 | 8.2 | 7.8 | 8.4 | 8.6 | 7.1 | 7.8 | 7.3 | 7.9 | 8.1 |
| | 3H | 7.6 | 8.2 | 7.9 | 8.5 | 8.7 | 7.1 | 7.7 | 7.4 | 7.9 | 8.1 |
| | 4H | 7.7 | 8.3 | 8.0 | 8.5 | 8.8 | 7.1 | 7.7 | 7.4 | 7.9 | 8.2 |
| | 6H | 7.8 | 8.4 | 8.1 | 8.6 | 8.9 | 7.2 | 7.7 | 7.5 | 8.0 | 8.2 |
| | 8H | 7.9 | 8.4 | 8.3 | 8.7 | 9.0 | 7.2 | 7.7 | 7.6 | 8.0 | 8.3 |
| 4H | 12H | 8.0 | 8.5 | 8.4 | 8.8 | 9.1 | 7.3 | 7.8 | 7.7 | 8.1 | 8.4 |
| | 2H | 7.4 | 8.0 | 7.7 | 8.3 | 8.5 | 7.0 | 7.5 | 7.3 | 7.8 | 8.0 |
| | 3H | 7.5 | 8.0 | 7.9 | 8.3 | 8.6 | 7.0 | 7.5 | 7.3 | 7.8 | 8.1 |
| | 4H | 7.7 | 8.1 | 8.0 | 8.4 | 8.8 | 7.1 | 7.5 | 7.5 | 7.8 | 8.2 |
| | 6H | 7.9 | 8.3 | 8.3 | 8.6 | 9.0 | 7.2 | 7.6 | 7.6 | 7.9 | 8.3 |
| 8H | 8H | 8.1 | 8.4 | 8.5 | 8.8 | 9.2 | 7.3 | 7.6 | 7.7 | 8.0 | 8.4 |
| | 12H | 8.2 | 8.5 | 8.7 | 8.9 | 9.3 | 7.5 | 7.8 | 7.9 | 8.2 | 8.6 |
| | 4H | 7.7 | 8.0 | 8.1 | 8.4 | 8.8 | 7.1 | 7.4 | 7.5 | 7.8 | 8.2 |
| | 6H | 8.0 | 8.3 | 8.5 | 8.7 | 9.1 | 7.3 | 7.6 | 7.6 | 8.0 | 8.4 |
| | 8H | 8.2 | 8.4 | 8.7 | 8.9 | 9.3 | 7.5 | 7.7 | 8.0 | 8.1 | 8.6 |
| 12H | 12H | 8.5 | 8.6 | 9.0 | 9.1 | 9.6 | 7.8 | 7.9 | 8.3 | 8.4 | 8.9 |
| | 4H | 7.7 | 7.9 | 8.1 | 8.3 | 8.7 | 7.1 | 7.4 | 7.5 | 7.8 | 8.2 |
| | 6H | 8.0 | 8.2 | 8.5 | 8.7 | 9.1 | 7.4 | 7.6 | 7.8 | 8.0 | 8.5 |
| | 8H | 8.3 | 8.4 | 8.8 | 8.9 | 9.4 | 7.6 | 7.7 | 8.1 | 8.2 | 8.7 |
| | Variation of the observer position for the luminaire distances S | | | | | | | | | | |
| S = 1.0H | +5.0 / -2.9 | | | | | +5.0 / -3.3 | | | | | |
| S = 1.5H | +7.6 / -3.4 | | | | | +7.7 / -3.6 | | | | | |
| S = 2.0H | +9.6 / -3.8 | | | | | +9.7 / -4.3 | | | | | |
| Standard table | BK02 | | | | | BK01 | | | | | |
| Correction Summand | -9.8 | | | | | -10.7 | | | | | |
| Corrected Glare Indices referring to 2750lm Total Luminous Flux | | | | | | | | | | | |


<http://www.glaciallight.com>

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,
Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NW-4000K-38D-Lens / LDC (Polar)

Luminaire: GlacialLight GL-TSL30-NW-4000K-38D-Lens
Lamps: 1 x Track Spot Light

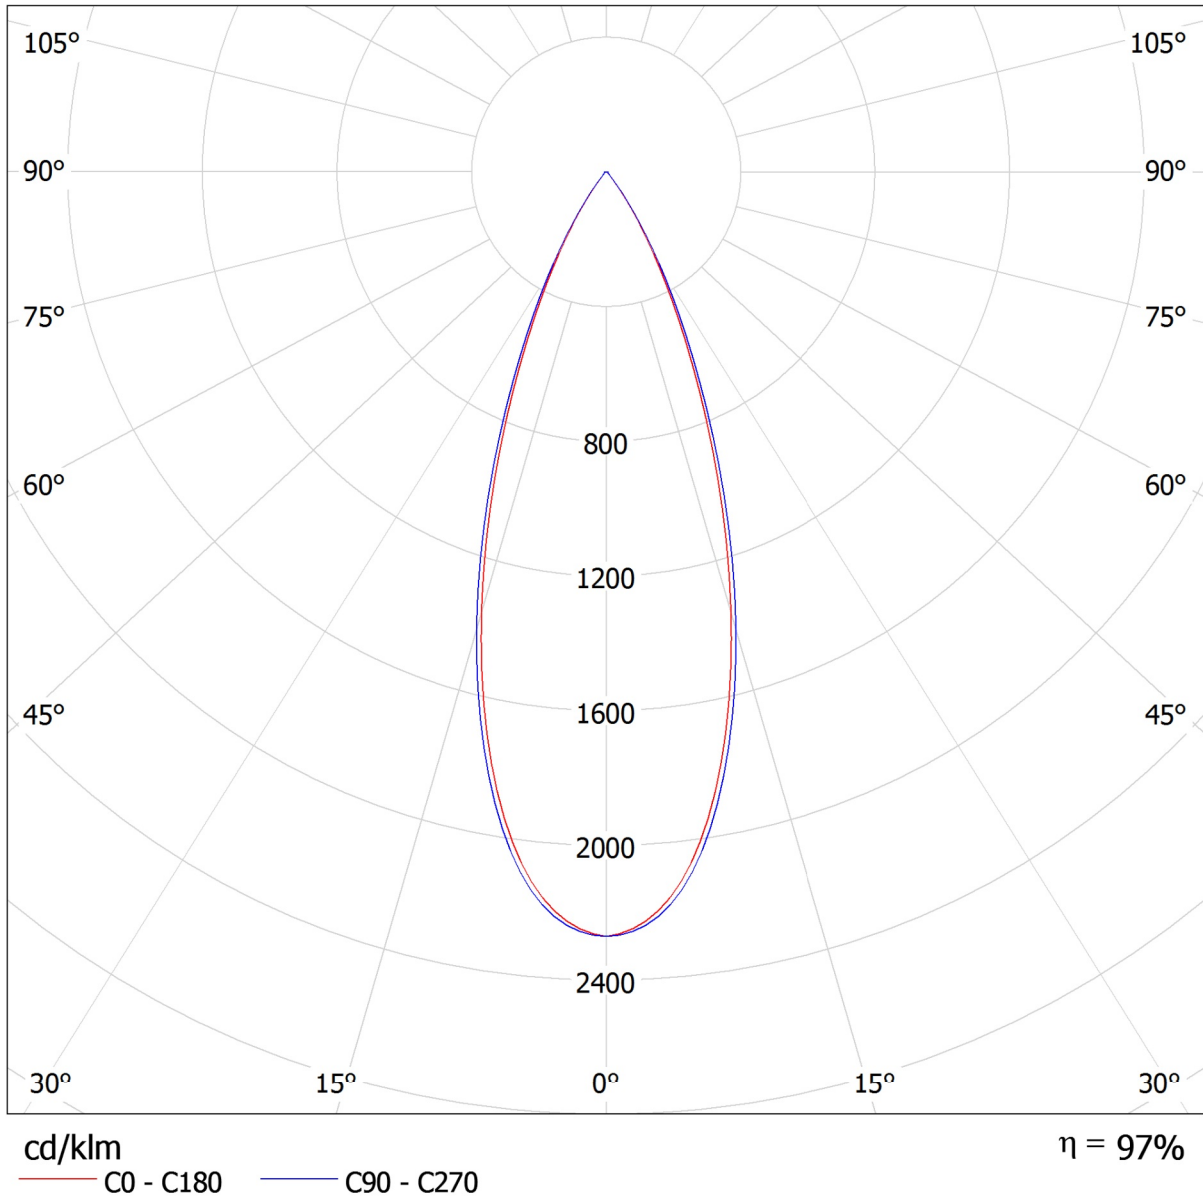


<http://www.glaciallight.com>

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,
Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NW-4000K-38D-Lens / LDC (Linear)

Luminaire: GlacialLight GL-TSL30-NW-4000K-38D-Lens
Lamps: 1 x Track Spot Light

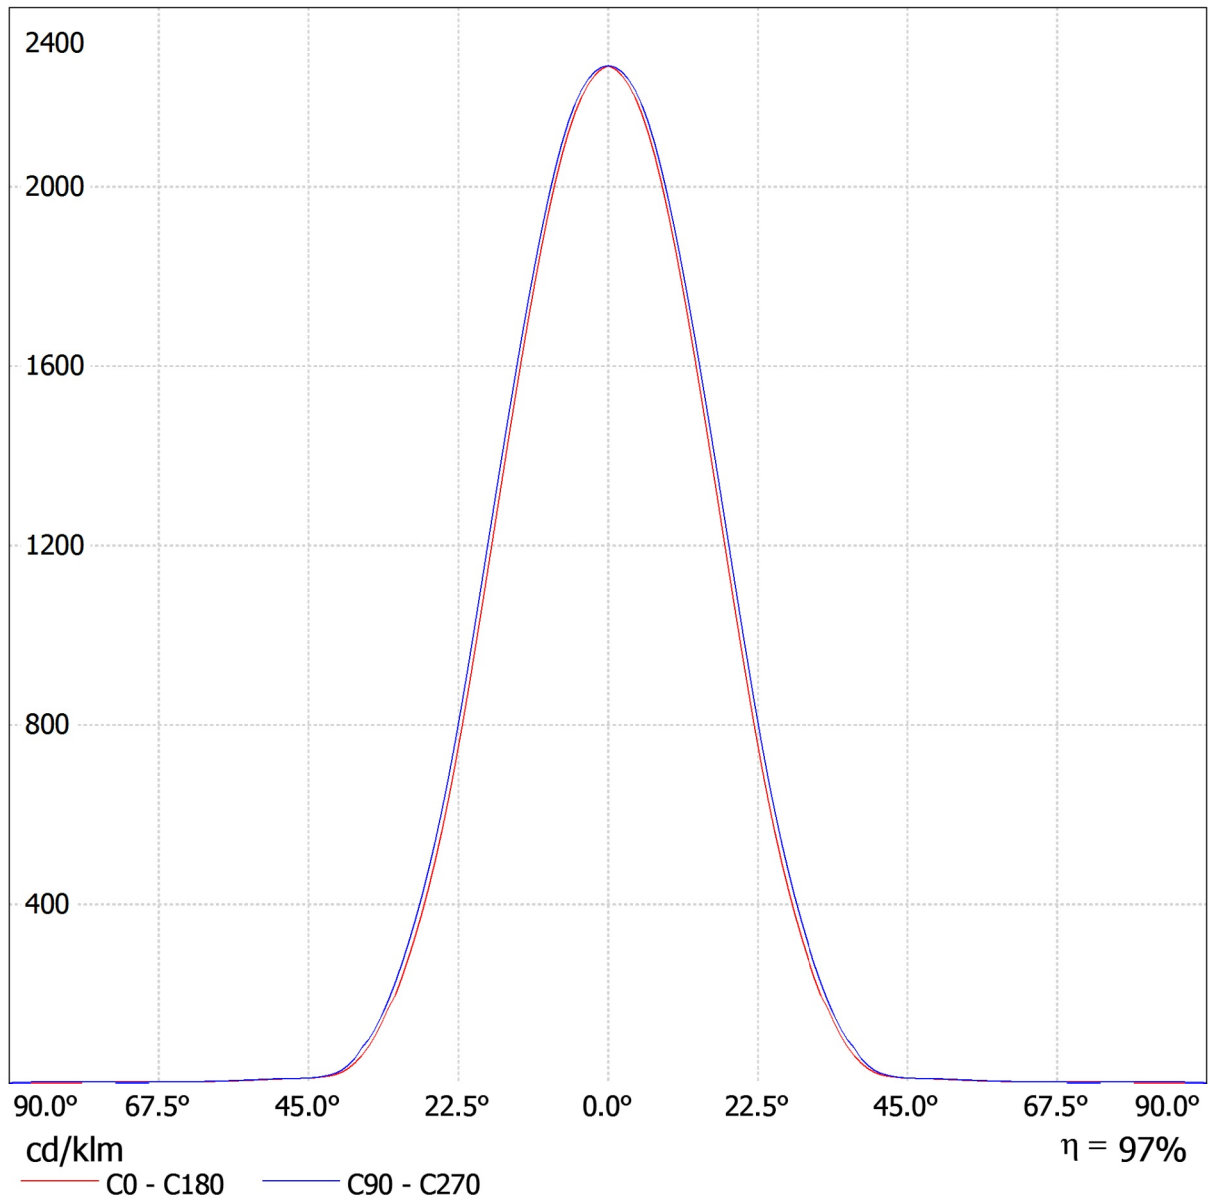

http://www.glaciallight.com

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,
Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com

GlacialLight GL-TSL30-NW-4000K-38D-Lens / UGR-Table

Luminaire: GlacialLight GL-TSL30-NW-4000K-38D-Lens
Lamps: 1 x Track Spot Light

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-----|---|-----|-----|-----|-----|--|-----|-----|-----|-----|
| ρ Ceiling | | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 |
| ρ Walls | | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 |
| ρ Floor | | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 7.6 | 8.2 | 7.8 | 8.4 | 8.6 | 7.1 | 7.8 | 7.3 | 7.9 | 8.1 |
| | 3H | 7.6 | 8.2 | 7.9 | 8.5 | 8.7 | 7.1 | 7.7 | 7.4 | 7.9 | 8.1 |
| | 4H | 7.7 | 8.3 | 8.0 | 8.5 | 8.8 | 7.1 | 7.7 | 7.4 | 7.9 | 8.2 |
| | 6H | 7.8 | 8.4 | 8.1 | 8.6 | 8.9 | 7.2 | 7.7 | 7.5 | 8.0 | 8.2 |
| | 8H | 7.9 | 8.4 | 8.3 | 8.7 | 9.0 | 7.2 | 7.7 | 7.6 | 8.0 | 8.3 |
| | 12H | 8.0 | 8.5 | 8.4 | 8.8 | 9.1 | 7.3 | 7.8 | 7.7 | 8.1 | 8.4 |
| 4H | 2H | 7.4 | 8.0 | 7.7 | 8.3 | 8.5 | 7.0 | 7.5 | 7.3 | 7.8 | 8.0 |
| | 3H | 7.5 | 8.0 | 7.9 | 8.3 | 8.6 | 7.0 | 7.5 | 7.3 | 7.8 | 8.1 |
| | 4H | 7.7 | 8.1 | 8.0 | 8.4 | 8.8 | 7.1 | 7.5 | 7.5 | 7.8 | 8.2 |
| | 6H | 7.9 | 8.3 | 8.3 | 8.6 | 9.0 | 7.2 | 7.6 | 7.6 | 7.9 | 8.3 |
| | 8H | 8.1 | 8.4 | 8.5 | 8.8 | 9.2 | 7.3 | 7.6 | 7.7 | 8.0 | 8.4 |
| | 12H | 8.2 | 8.5 | 8.7 | 8.9 | 9.3 | 7.5 | 7.8 | 7.9 | 8.2 | 8.6 |
| 8H | 4H | 7.7 | 8.0 | 8.1 | 8.4 | 8.8 | 7.1 | 7.4 | 7.5 | 7.8 | 8.2 |
| | 6H | 8.0 | 8.3 | 8.5 | 8.7 | 9.1 | 7.3 | 7.6 | 7.8 | 8.0 | 8.4 |
| | 8H | 8.2 | 8.4 | 8.7 | 8.9 | 9.3 | 7.5 | 7.7 | 8.0 | 8.1 | 8.6 |
| | 12H | 8.5 | 8.6 | 9.0 | 9.1 | 9.6 | 7.8 | 7.9 | 8.3 | 8.4 | 8.9 |
| 12H | 4H | 7.7 | 7.9 | 8.1 | 8.3 | 8.7 | 7.1 | 7.4 | 7.5 | 7.8 | 8.2 |
| | 6H | 8.0 | 8.2 | 8.5 | 8.7 | 9.1 | 7.4 | 7.6 | 7.8 | 8.0 | 8.5 |
| | 8H | 8.3 | 8.4 | 8.8 | 8.9 | 9.4 | 7.6 | 7.7 | 8.1 | 8.2 | 8.7 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | | +5.0 / -2.9 | | | | | +5.0 / -3.3 | | | | |
| S = 1.5H | | +7.6 / -3.4 | | | | | +7.7 / -3.6 | | | | |
| S = 2.0H | | +9.6 / -3.8 | | | | | +9.7 / -4.3 | | | | |
| Standard table | | BK02 | | | | | BK01 | | | | |
| Correction Summand | | -9.8 | | | | | -10.7 | | | | |
| Corrected Glare Indices referring to 2750lm Total Luminous Flux | | | | | | | | | | | |

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

http://www.glaciallight.com

7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei City,
Taiwan, 235, R.O.C.

Operator
Telephone +886 2 2244-1227
Fax +886 2 2244-1241
e-Mail sales@GlacialLight.com


GlacialLight GL-TSL30-NW-4000K-38D-Lens / Glare Data Sheet

Luminaire: GlacialLight GL-TSL30-
NW-4000K-38D-Lens

Lamps: 1 x Track Spot Light

| Glare Evaluation According to UGR | | | | | | | | | | | |
|--|-------------|---|-----|-----|-----|-------------|--|-----|-----|-----|-----|
| ρ Ceiling | 70 | 70 | 50 | 50 | 30 | 70 | 70 | 50 | 50 | 30 | |
| ρ Walls | 50 | 30 | 50 | 30 | 30 | 50 | 30 | 50 | 30 | 30 | |
| ρ Floor | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | |
| Room Size X Y | | Viewing direction at right angles to lamp axis | | | | | Viewing direction parallel to lamp axis | | | | |
| 2H | 2H | 7.6 | 8.2 | 7.8 | 8.4 | 8.6 | 7.1 | 7.8 | 7.3 | 7.9 | 8.1 |
| | 3H | 7.6 | 8.2 | 7.9 | 8.5 | 8.7 | 7.1 | 7.7 | 7.4 | 7.9 | 8.1 |
| | 4H | 7.7 | 8.3 | 8.0 | 8.5 | 8.8 | 7.1 | 7.7 | 7.4 | 7.9 | 8.2 |
| | 6H | 7.8 | 8.4 | 8.1 | 8.6 | 8.9 | 7.2 | 7.7 | 7.5 | 8.0 | 8.2 |
| | 8H | 7.9 | 8.4 | 8.3 | 8.7 | 9.0 | 7.2 | 7.7 | 7.6 | 8.0 | 8.3 |
| 4H | 12H | 8.0 | 8.5 | 8.4 | 8.8 | 9.1 | 7.3 | 7.8 | 7.7 | 8.1 | 8.4 |
| | 2H | 7.4 | 8.0 | 7.7 | 8.3 | 8.5 | 7.0 | 7.5 | 7.3 | 7.8 | 8.0 |
| | 3H | 7.5 | 8.0 | 7.9 | 8.3 | 8.6 | 7.0 | 7.5 | 7.3 | 7.8 | 8.1 |
| | 4H | 7.7 | 8.1 | 8.0 | 8.4 | 8.8 | 7.1 | 7.5 | 7.5 | 7.8 | 8.2 |
| | 6H | 7.9 | 8.3 | 8.3 | 8.6 | 9.0 | 7.2 | 7.6 | 7.6 | 7.9 | 8.3 |
| 8H | 8H | 8.1 | 8.4 | 8.5 | 8.8 | 9.2 | 7.3 | 7.6 | 7.7 | 8.0 | 8.4 |
| | 12H | 8.2 | 8.5 | 8.7 | 8.9 | 9.3 | 7.5 | 7.8 | 7.9 | 8.2 | 8.6 |
| | 4H | 7.7 | 8.0 | 8.1 | 8.4 | 8.8 | 7.1 | 7.4 | 7.5 | 7.8 | 8.2 |
| | 6H | 8.0 | 8.3 | 8.5 | 8.7 | 9.1 | 7.3 | 7.6 | 7.8 | 8.0 | 8.4 |
| | 8H | 8.2 | 8.4 | 8.7 | 8.9 | 9.3 | 7.5 | 7.7 | 8.0 | 8.1 | 8.6 |
| 12H | 12H | 8.5 | 8.6 | 9.0 | 9.1 | 9.6 | 7.8 | 7.9 | 8.3 | 8.4 | 8.9 |
| | 4H | 7.7 | 7.9 | 8.1 | 8.3 | 8.7 | 7.1 | 7.4 | 7.5 | 7.8 | 8.2 |
| | 6H | 8.0 | 8.2 | 8.5 | 8.7 | 9.1 | 7.4 | 7.6 | 7.8 | 8.0 | 8.5 |
| | 8H | 8.3 | 8.4 | 8.8 | 8.9 | 9.4 | 7.6 | 7.7 | 8.1 | 8.2 | 8.7 |
| Variation of the observer position for the luminaire distances S | | | | | | | | | | | |
| S = 1.0H | +5.0 / -2.9 | | | | | +5.0 / -3.3 | | | | | |
| S = 1.5H | +7.6 / -3.4 | | | | | +7.7 / -3.6 | | | | | |
| S = 2.0H | +9.6 / -3.8 | | | | | +9.7 / -4.3 | | | | | |
| Standard table | BK02 | | | | | BK01 | | | | | |
| Correction Summand | -9.8 | | | | | -10.7 | | | | | |
| Corrected Glare Indices referring to 2750lm Total Luminous Flux | | | | | | | | | | | |

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

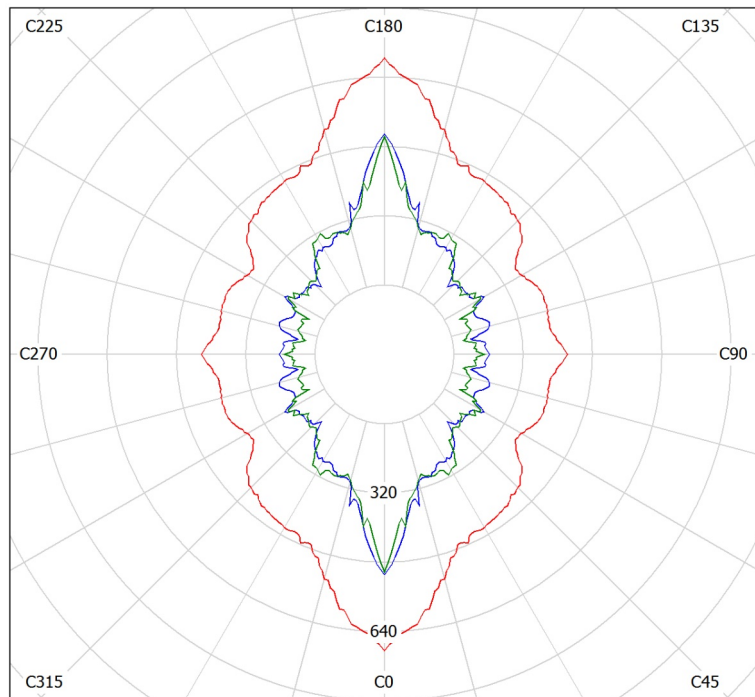

cd/m²
— g = 55.0° — g = 65.0° — g = 75.0°