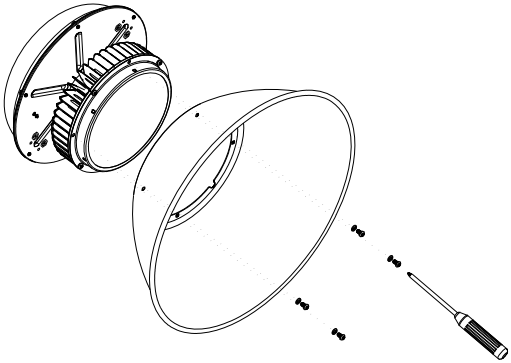
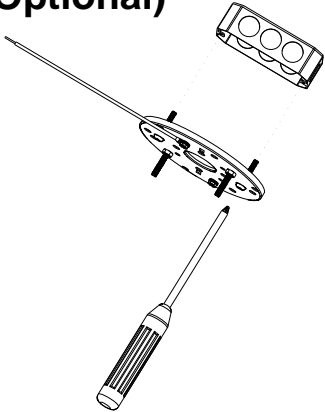
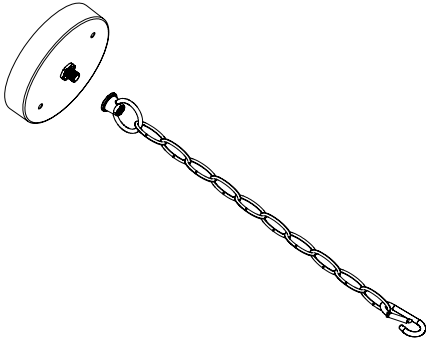
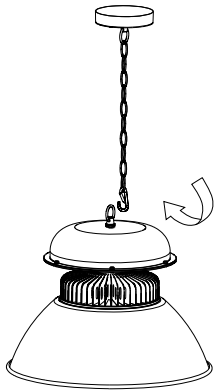
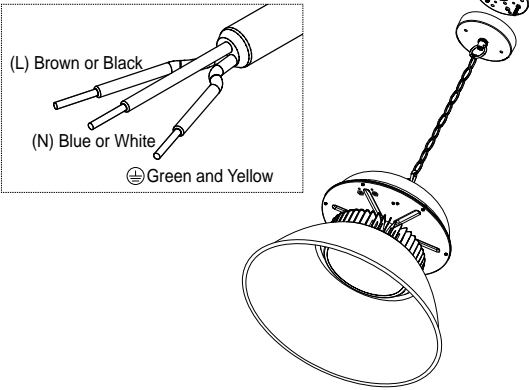
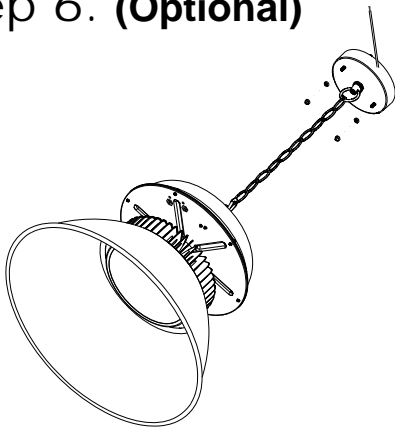


GL-BL110 Installation Steps (Step 2~6 are optional items)

| | | |
|--|---|--|
| <p>Step 1.</p>  | <p>Step 2. (Optional)</p>  | <p>Step 3. (Optional)</p>  |
| <p>Use four M5*8mm screws to secure the light-shade to the fixture with a Phillips screwdriver.</p> | <p>Use a Phillips screwdriver and two 8#-32 screws to secure the mounting plate to the junction box.</p> | <p>Lock one end of the safety chain to the ceiling mount.</p> |
| <p>Step 4. (Optional)</p>  | <p>Step 5.</p>  <p>(L) Brown or Black (N) Blue or White ⊕ Green and Yellow</p> | <p>Step 6. (Optional)</p>  |
| <p>Hook the other end of the safety chain into the ring on the top of the lighting fixture.</p> | <p>Connect the fixture's power cables to their corresponding colors of the power source and entwine together. Connect the grounding line to the grounding screw of the grounding devices or mounting plate(optional).</p> | <p>Secure the ceiling mount's cover by screwing the 3/16 nut tight, followed by screwing the 3/16 semi-circular nut tight.</p> |