


Operator
Telephone
Fax
e-Mail

GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade / Luminaire Data Sheet

Luminous emittance 1:

See our luminaire catalog for an image of the luminaire.

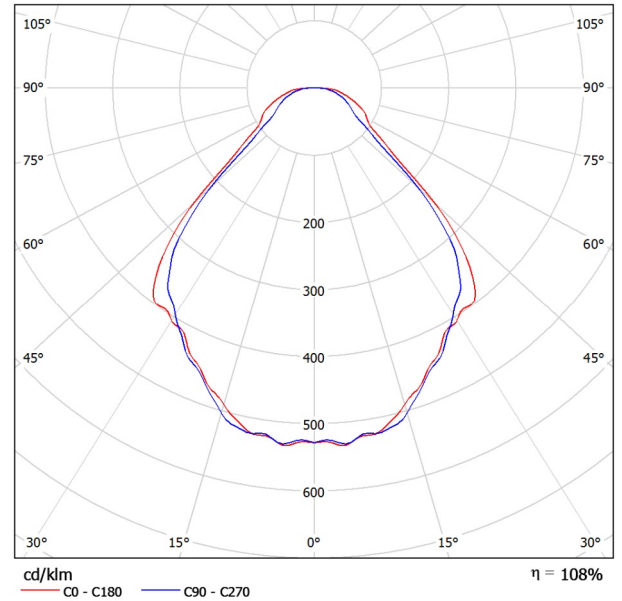

Luminaire classification according to CIE: 100
CIE flux code: 61 85 95 100 109


Luminous emittance 1:

Glare Evaluation According to UGR												
ρ Ceiling	70	70	50	50	30	70	70	50	50	30		
ρ Walls	50	30	50	30	30	50	30	50	30	30		
ρ Floor	20	20	20	20	20	20	20	20	20	20		
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	17.6	18.8	17.9	19.0	19.2	16.6	17.7	16.9	17.9	18.2	
	3H	18.4	19.4	18.7	19.7	19.9	17.0	18.1	17.3	18.3	18.6	
	4H	18.7	19.7	19.1	20.0	20.3	17.2	18.2	17.6	18.5	18.8	
	6H	19.0	19.9	19.4	20.2	20.5	17.4	18.3	17.8	18.6	18.9	
	8H	19.1	20.0	19.5	20.3	20.6	17.5	18.4	17.9	18.7	19.0	
	12H	19.2	20.0	19.6	20.4	20.7	17.5	18.4	17.9	18.7	19.0	
4H	2H	17.8	18.8	18.2	19.1	19.4	16.9	17.9	17.3	18.2	18.5	
	3H	18.9	19.7	19.2	20.0	20.4	17.6	18.5	18.0	18.8	19.1	
	4H	19.4	20.1	19.8	20.5	20.8	18.0	18.7	18.4	19.1	19.4	
	6H	19.8	20.5	20.3	20.9	21.3	18.3	18.9	18.7	19.3	19.7	
	8H	20.0	20.6	20.4	21.0	21.4	18.4	19.0	18.8	19.4	19.8	
	12H	20.2	20.7	20.6	21.1	21.5	18.5	19.0	18.9	19.4	19.8	
8H	4H	19.6	20.2	20.1	20.6	21.0	18.4	19.0	18.8	19.4	19.8	
	6H	20.3	20.7	20.7	21.2	21.6	18.8	19.3	19.2	19.7	20.1	
	8H	20.5	21.0	21.0	21.4	21.9	18.9	19.3	19.4	19.8	20.3	
	12H	20.8	21.2	21.3	21.6	22.1	19.1	19.4	19.5	19.9	20.4	
	12H	4H	19.6	20.2	20.1	20.6	21.0	18.4	19.0	18.9	19.4	19.8
		6H	20.3	20.7	20.8	21.2	21.7	18.9	19.3	19.4	19.8	20.3
8H		20.7	21.0	21.2	21.5	22.0	19.1	19.5	19.6	20.0	20.5	
Variation of the observer position for the luminaire distances S												
S = 1.0H	+0.6 / -0.7					+0.7 / -1.0						
S = 1.5H	+1.4 / -0.9					+1.7 / -1.3						
S = 2.0H	+2.5 / -1.3					+2.9 / -1.7						
Standard table	BK04					BK03						
Correction Summand	3.0					1.3						
Corrected Glare Indices referring to 4100lm Total Luminous Flux												

Operator
Telephone
Fax
e-Mail

GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade / LDC (Polar)

Luminaire: GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade
Lamps: 1 x GL-BL50-WW-3000K-90D-Frosted-with lampshade

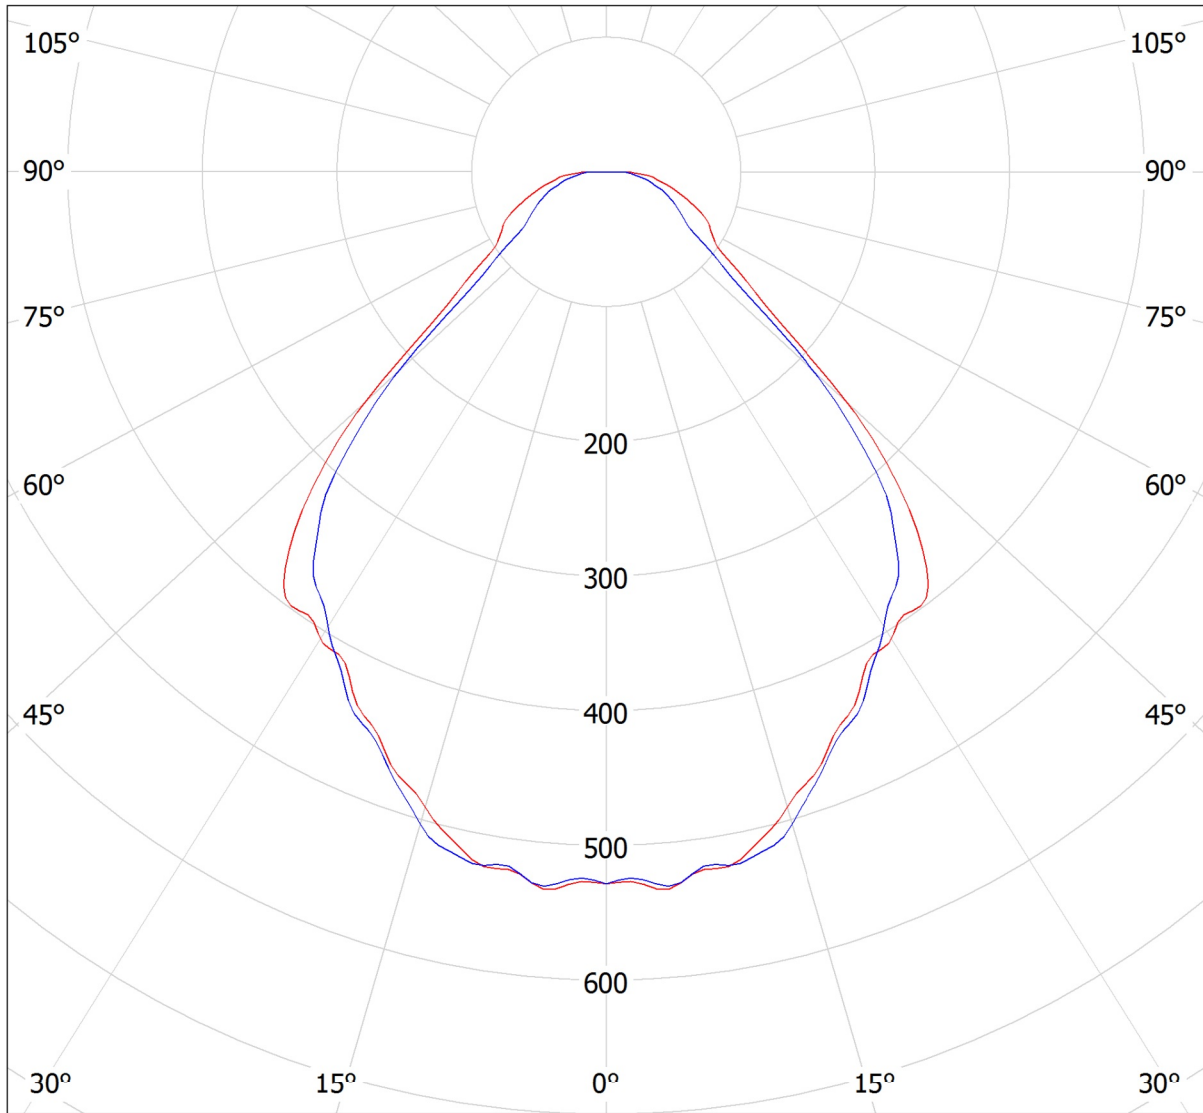

cd/klm
— C0 - C180 — C90 - C270


$\eta = 108\%$

Operator
Telephone
Fax
e-Mail

GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade / LDC (Linear)

Luminaire: GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade

Lamps: 1 x GL-BL50-WW-3000K-90D-Frosted-with lampshade

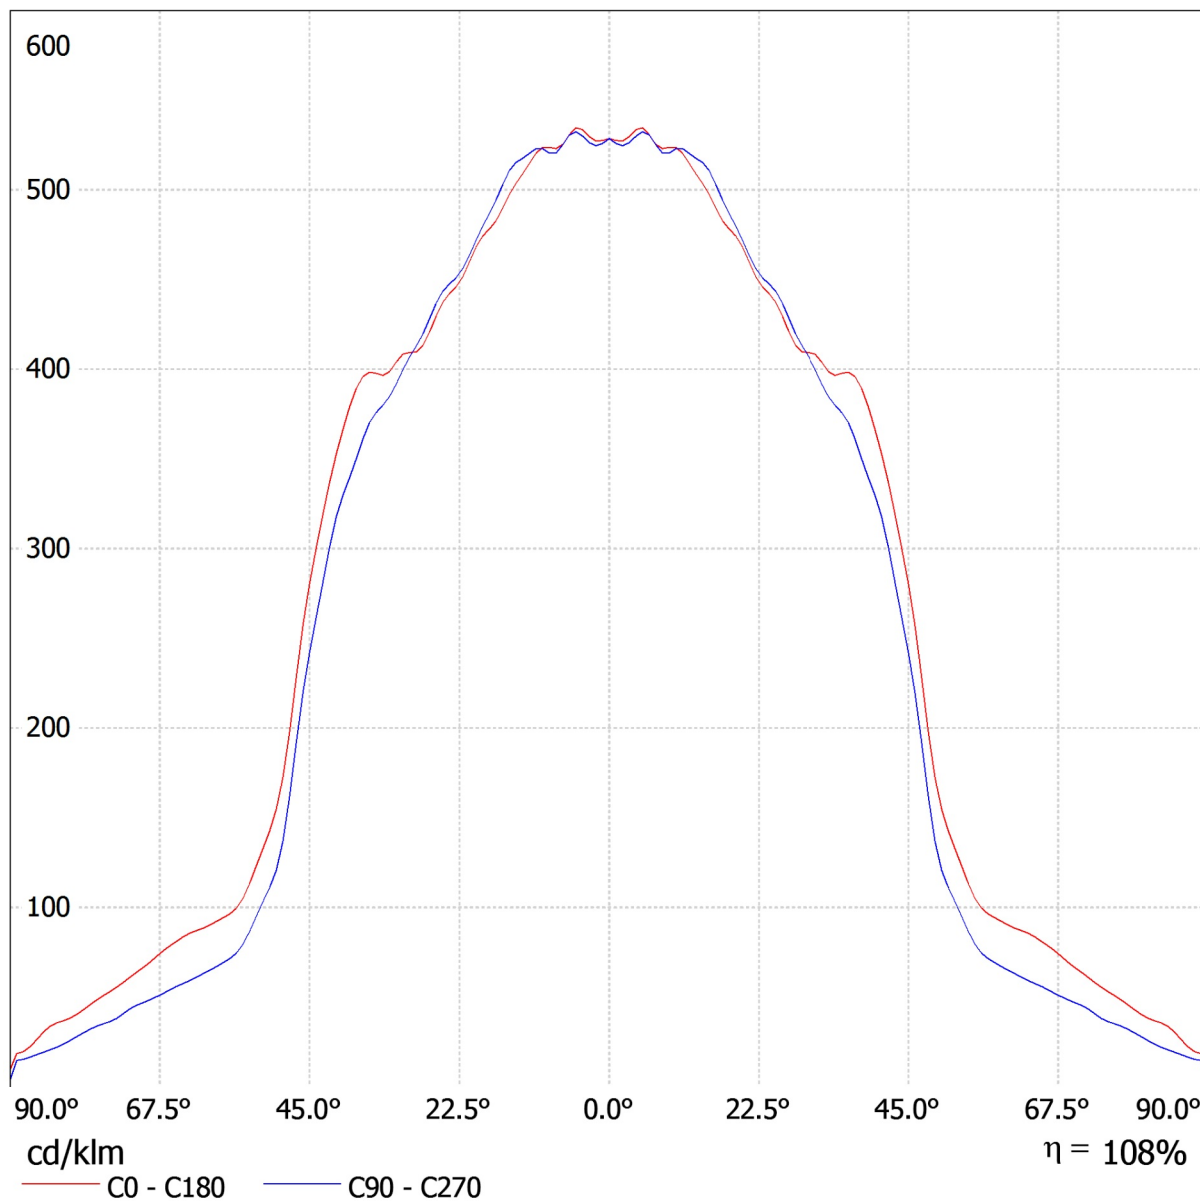

Operator
Telephone
Fax
e-Mail

GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade / UGR-Table

Luminaire: GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade
Lamps: 1 x GL-BL50-WW-3000K-90D-Frosted-with lampshade

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	17.6	18.8	17.9	19.0	19.2	16.6	17.7	16.9	17.9	18.2
	3H	18.4	19.4	18.7	19.7	19.9	17.0	18.1	17.3	18.3	18.6
	4H	18.7	19.7	19.1	20.0	20.3	17.2	18.2	17.6	18.5	18.8
	6H	19.0	19.9	19.4	20.2	20.5	17.4	18.3	17.8	18.6	18.9
	8H	19.1	20.0	19.5	20.3	20.6	17.5	18.4	17.9	18.7	19.0
	12H	19.2	20.0	19.6	20.4	20.7	17.5	18.4	17.9	18.7	19.0
4H	2H	17.8	18.8	18.2	19.1	19.4	16.9	17.9	17.3	18.2	18.5
	3H	18.9	19.7	19.2	20.0	20.4	17.6	18.5	18.0	18.8	19.1
	4H	19.4	20.1	19.8	20.5	20.8	18.0	18.7	18.4	19.1	19.4
	6H	19.8	20.5	20.3	20.9	21.3	18.3	18.9	18.7	19.3	19.7
	8H	20.0	20.6	20.4	21.0	21.4	18.4	19.0	18.8	19.4	19.8
	12H	20.2	20.7	20.6	21.1	21.5	18.5	19.0	18.9	19.4	19.8
8H	4H	19.6	20.2	20.1	20.6	21.0	18.4	19.0	18.8	19.4	19.8
	6H	20.3	20.7	20.7	21.2	21.6	18.8	19.3	19.2	19.7	20.1
	8H	20.5	21.0	21.0	21.4	21.9	18.9	19.3	19.4	19.8	20.3
	12H	20.8	21.2	21.3	21.6	22.1	19.1	19.4	19.5	19.9	20.4
12H	4H	19.6	20.2	20.1	20.6	21.0	18.4	19.0	18.9	19.4	19.8
	6H	20.3	20.7	20.8	21.2	21.7	18.9	19.3	19.4	19.8	20.3
	8H	20.7	21.0	21.2	21.5	22.0	19.1	19.5	19.6	20.0	20.5
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.6 / -0.7					+0.7 / -1.0					
S = 1.5H	+1.4 / -0.9					+1.7 / -1.3					
S = 2.0H	+2.5 / -1.3					+2.9 / -1.7					
Standard table	BK04					BK03					
Correction Summand	3.0					1.3					
Corrected Glare Indices referring to 4100lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

Operator
Telephone
Fax
e-Mail

GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade / Glare Data Sheet

Luminaire: GlacialLight GL-BL50-WW-3000K-90D-Frosted-with lampshade

Lamps: 1 x GL-BL50-WW-3000K-90D-Frosted-with lampshade

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	17.6	18.8	17.9	19.0	19.2	16.6	17.7	16.9	17.9	18.2
	3H	18.4	19.4	18.7	19.7	19.9	17.0	18.1	17.3	18.3	18.6
	4H	18.7	19.7	19.1	20.0	20.3	17.2	18.2	17.6	18.5	18.8
	6H	19.0	19.9	19.4	20.2	20.5	17.4	18.3	17.8	18.6	18.9
	8H	19.1	20.0	19.5	20.3	20.6	17.5	18.4	17.9	18.7	19.0
4H	12H	19.2	20.0	19.6	20.4	20.7	17.5	18.4	17.9	18.7	19.0
	2H	17.8	18.8	18.2	19.1	19.4	16.9	17.9	17.3	18.2	18.5
	3H	18.9	19.7	19.2	20.0	20.4	17.6	18.5	18.0	18.8	19.1
	4H	19.4	20.1	19.8	20.5	20.8	18.0	18.7	18.4	19.1	19.4
	6H	19.8	20.5	20.3	20.9	21.3	18.3	18.9	18.7	19.3	19.7
8H	8H	20.0	20.6	20.4	21.0	21.4	18.4	19.0	18.8	19.4	19.8
	12H	20.2	20.7	20.6	21.1	21.5	18.5	19.0	18.9	19.4	19.8
	4H	19.6	20.2	20.1	20.6	21.0	18.4	19.0	18.8	19.4	19.8
	6H	20.3	20.7	20.7	21.2	21.6	18.8	19.3	19.2	19.7	20.1
	8H	20.5	21.0	21.0	21.4	21.9	18.9	19.3	19.4	19.8	20.3
12H	12H	20.8	21.2	21.3	21.6	22.1	19.1	19.4	19.5	19.9	20.4
	4H	19.6	20.2	20.1	20.6	21.0	18.4	19.0	18.9	19.4	19.8
	6H	20.3	20.7	20.8	21.2	21.7	18.9	19.3	19.4	19.8	20.3
	8H	20.7	21.0	21.2	21.5	22.0	19.1	19.5	19.6	20.0	20.5
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.6 / -0.7					+0.7 / -1.0					
S = 1.5H	+1.4 / -0.9					+1.7 / -1.3					
S = 2.0H	+2.5 / -1.3					+2.9 / -1.7					
Standard table	BK04					BK03					
Correction Summand	3.0					1.3					
Corrected Glare Indices referring to 4100lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

