


GlacialTech Inc.  
 http://www.glaciallight.com  
 7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei  
 City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department  
 Telephone +886 2 2244-1227  
 Fax +886 2 2244-1228  
 e-Mail sales@GlacialLight.com

## GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood / Luminaire Data Sheet

Luminous emittance 1:

See our luminaire catalog for an image of the luminaire.

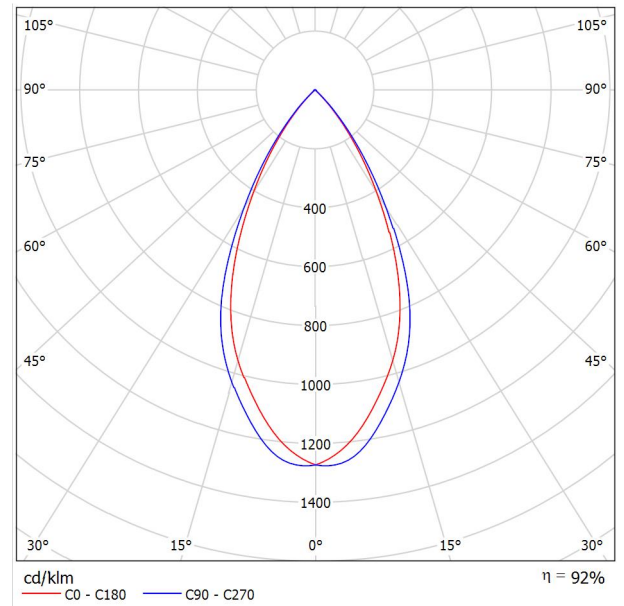

Luminaire classification according to CIE: 100  
 CIE flux code: 96 99 100 100 93

Luminous emittance 1:


Glare Evaluation According to UGR											
		70	70	50	50	30	70	70	50	50	30
p Ceiling											
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room Size	Viewing direction at right angles to lamp axis	Viewing direction parallel to lamp axis									
X	Y										
2H	2H	15.1	15.8	15.4	16.0	16.2	15.9	16.6	16.2	16.8	17.0
	3H	15.0	15.6	15.3	15.9	16.1	15.8	16.4	16.1	16.7	16.9
	4H	15.0	15.5	15.3	15.8	16.0	15.8	16.3	16.1	16.6	16.8
	6H	14.9	15.4	15.2	15.7	16.0	15.7	16.2	16.0	16.5	16.8
	8H	14.9	15.4	15.2	15.7	16.0	15.7	16.2	16.0	16.5	16.8
12H	14.9	15.3	15.2	15.6	15.9	15.6	16.1	16.0	16.4	16.7	
4H	2H	14.9	15.5	15.2	15.8	16.0	15.7	16.3	16.0	16.6	16.8
	3H	14.8	15.3	15.2	15.6	15.9	15.6	16.1	16.0	16.4	16.7
	4H	14.8	15.2	15.1	15.5	15.8	15.6	16.0	15.9	16.3	16.6
	6H	14.7	15.1	15.1	15.4	15.8	15.5	15.8	15.9	16.2	16.6
	8H	14.7	15.0	15.1	15.4	15.8	15.5	15.8	15.9	16.2	16.6
12H	14.7	14.9	15.1	15.3	15.8	15.5	15.7	15.9	16.1	16.5	
8H	4H	14.7	15.0	15.1	15.3	15.7	15.5	15.8	15.9	16.1	16.5
	6H	14.6	14.9	15.1	15.3	15.7	15.4	15.6	15.8	16.0	16.5
	8H	14.6	14.8	15.1	15.2	15.7	15.4	15.6	15.8	16.0	16.5
	12H	14.6	14.7	15.1	15.2	15.7	15.3	15.5	15.8	16.0	16.5
12H	4H	14.6	14.9	15.1	15.3	15.7	15.4	15.7	15.8	16.1	16.5
	6H	14.6	14.8	15.0	15.2	15.7	15.4	15.6	15.8	16.0	16.5
	8H	14.6	14.7	15.0	15.2	15.7	15.3	15.5	15.8	15.9	16.4
Variation of the observer position for the luminaire distances S											
S = 1.0H		+5.1 / -10.2					+5.2 / -11.1				
S = 1.5H		+7.9 / -10.5					+8.0 / -11.3				
S = 2.0H		+9.9 / -10.8					+10.0 / -11.7				
Standard table		BK00					BK00				
Correction Summand		-3.7					-3.0				
Corrected Glare Indices referring to 2800lm Total Luminous Flux											

GlacialTech Inc.  
http://www.glaciallight.com  
7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei  
City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department  
Telephone +886 2 2244-1227  
Fax +886 2 2244-1228  
e-Mail sales@GlacialLight.com

## GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood / LDC (Polar)

Luminaire: GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood  
Lamps: 1 x Flood Light

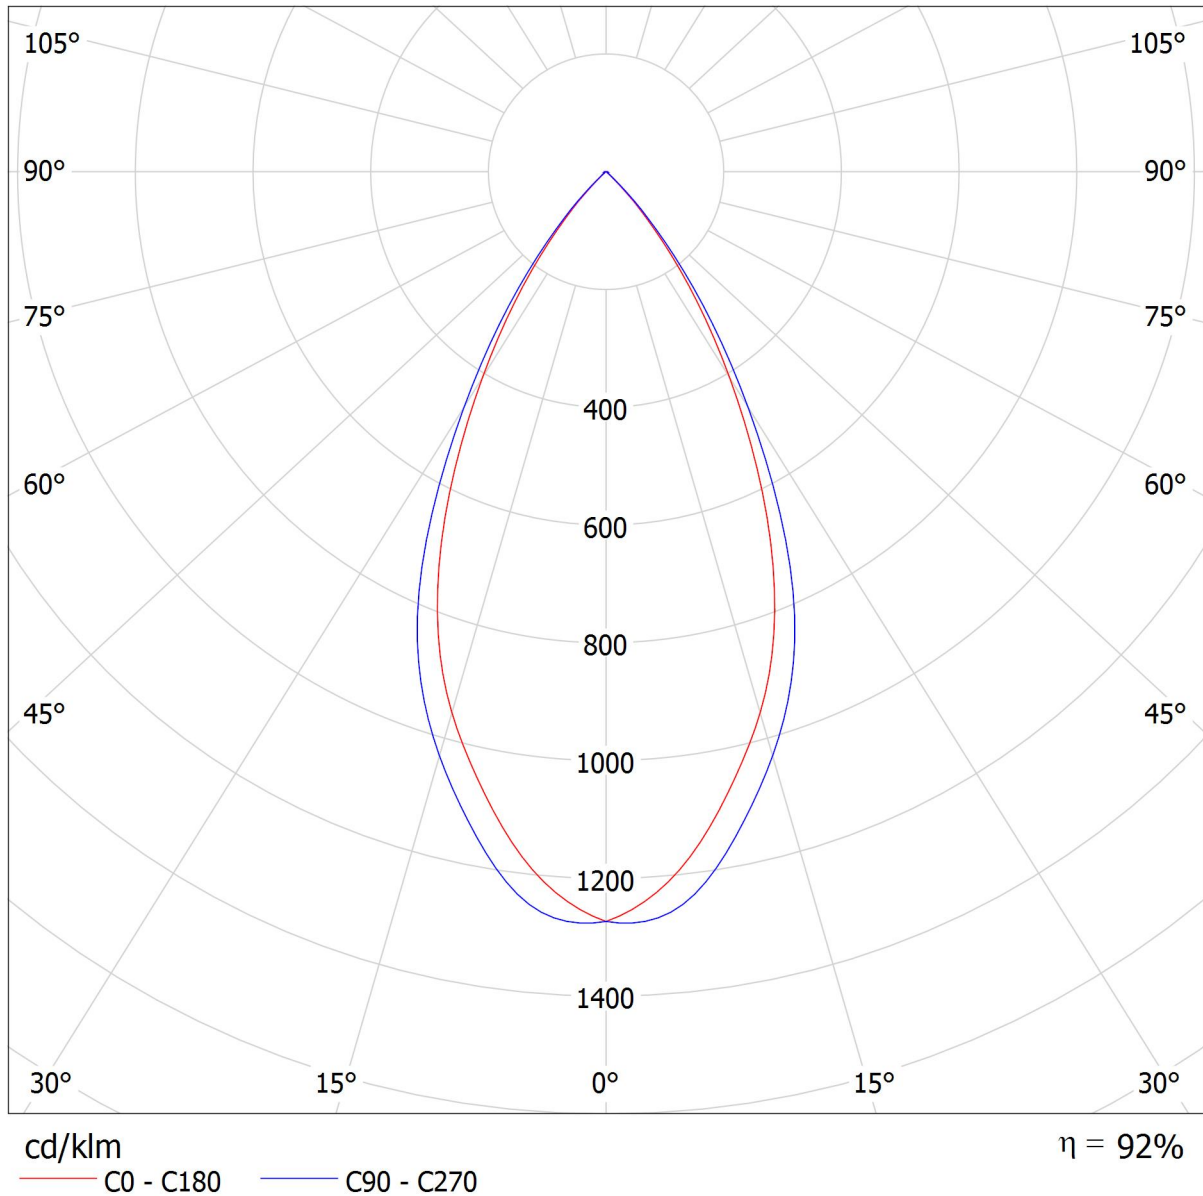


GlacialTech Inc.  
<http://www.glaciallight.com>  
7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei  
City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department  
Telephone +886 2 2244-1227  
Fax +886 2 2244-1228  
e-Mail [sales@GlacialLight.com](mailto:sales@GlacialLight.com)

## GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood / LDC (Linear)

Luminaire: GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood  
Lamps: 1 x Flood Light

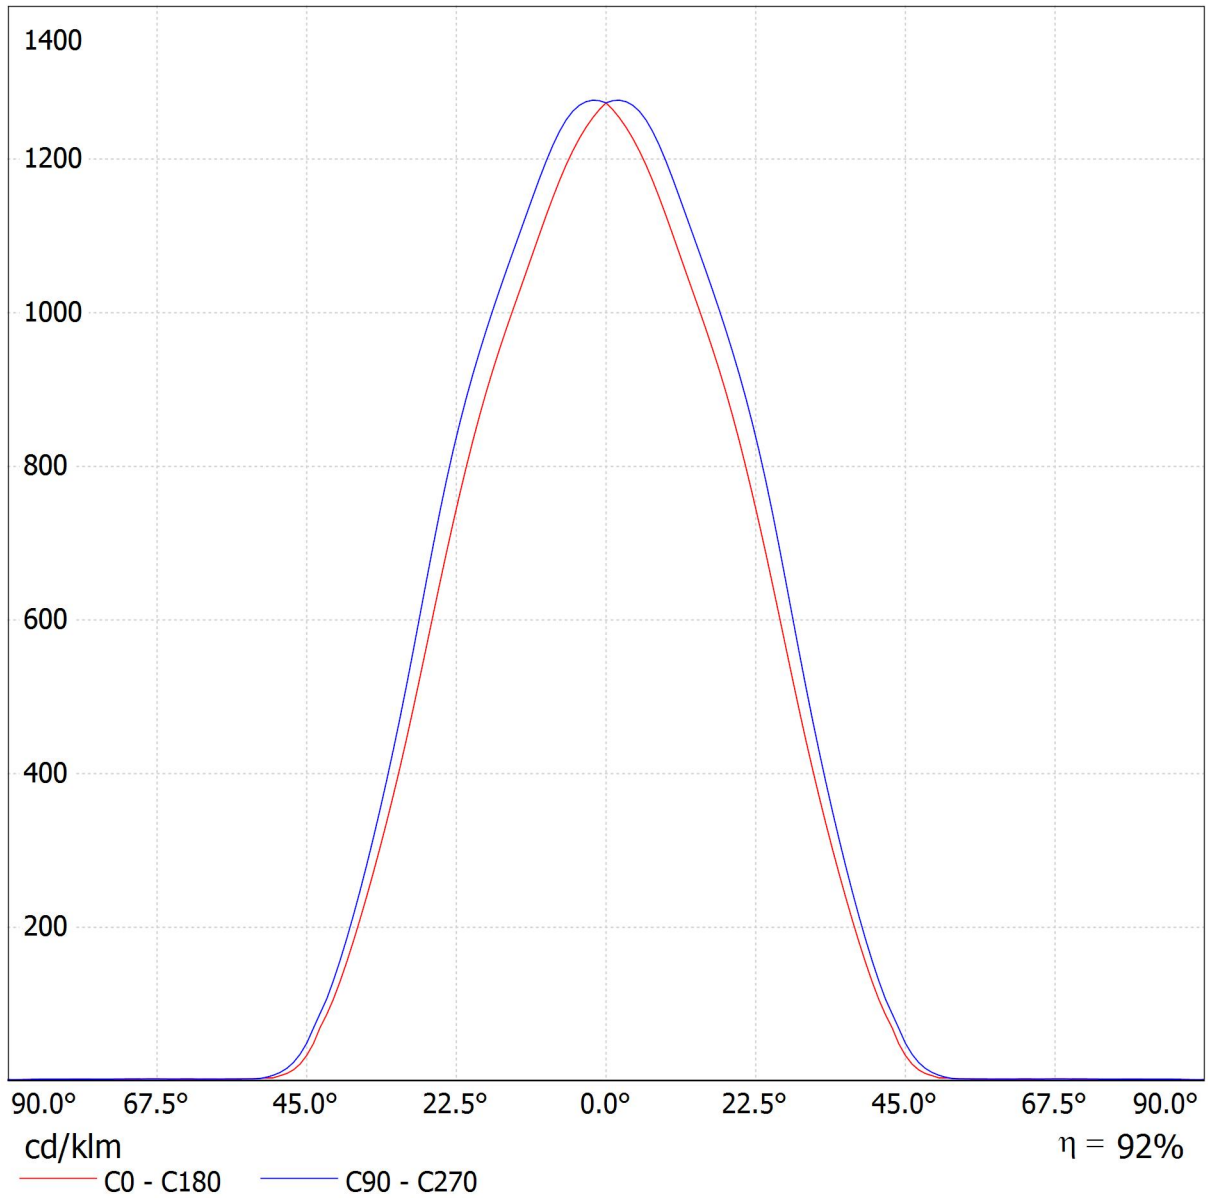

GlacialTech Inc.  
 http://www.glaciallight.com  
 7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei  
 City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department  
 Telephone +886 2 2244-1227  
 Fax +886 2 2244-1228  
 e-Mail sales@GlacialLight.com

## GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood / UGR-Table

Luminaire: GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood  
 Lamps: 1 x Flood Light

<b>Glare Evaluation According to UGR</b>											
$\rho$ Ceiling		70	70	50	50	30	70	70	50	50	30
$\rho$ Walls		50	30	50	30	30	50	30	50	30	30
$\rho$ Floor		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	15.1	15.8	15.4	16.0	16.2	15.9	16.6	16.2	16.8	17.0
	3H	15.0	15.6	15.3	15.9	16.1	15.8	16.4	16.1	16.7	16.9
	4H	15.0	15.5	15.3	15.8	16.0	15.8	16.3	16.1	16.6	16.8
	6H	14.9	15.4	15.2	15.7	16.0	15.7	16.2	16.0	16.5	16.8
	8H	14.9	15.4	15.2	15.7	16.0	15.7	16.2	16.0	16.5	16.8
	12H	14.9	15.3	15.2	15.6	15.9	15.6	16.1	16.0	16.4	16.7
4H	2H	14.9	15.5	15.2	15.8	16.0	15.7	16.3	16.0	16.6	16.8
	3H	14.8	15.3	15.2	15.6	15.9	15.6	16.1	16.0	16.4	16.7
	4H	14.8	15.2	15.1	15.5	15.8	15.6	16.0	15.9	16.3	16.6
	6H	14.7	15.1	15.1	15.4	15.8	15.5	15.8	15.9	16.2	16.6
	8H	14.7	15.0	15.1	15.4	15.8	15.5	15.8	15.9	16.2	16.6
	12H	14.7	14.9	15.1	15.3	15.8	15.5	15.7	15.9	16.1	16.5
8H	4H	14.7	15.0	15.1	15.3	15.7	15.5	15.8	15.9	16.1	16.5
	6H	14.6	14.9	15.1	15.3	15.7	15.4	15.6	15.8	16.0	16.5
	8H	14.6	14.8	15.1	15.2	15.7	15.4	15.6	15.8	16.0	16.5
	12H	14.6	14.7	15.1	15.2	15.7	15.3	15.5	15.8	16.0	16.5
12H	4H	14.6	14.9	15.1	15.3	15.7	15.4	15.7	15.8	16.1	16.5
	6H	14.6	14.8	15.0	15.2	15.7	15.4	15.6	15.8	16.0	16.5
	8H	14.6	14.7	15.0	15.2	15.7	15.3	15.5	15.8	15.9	16.4
Variation of the observer position for the luminaire distances S											
S = 1.0H		+5.1 / -10.2					+5.2 / -11.1				
S = 1.5H		+7.9 / -10.5					+8.0 / -11.3				
S = 2.0H		+9.9 / -10.8					+10.0 / -11.7				
Standard table		BK00					BK00				
Correction Summand		-3.7					-3.0				
Corrected Glare Indices referring to 2800lm Total Luminous Flux											

The UGR values have been calculated according to CIE Publ. 117 Spacing-to-Height-Ratio = 0.25.

GlacialTech Inc.  
http://www.glaciallight.com  
7F, No.352, Sec. 2, Zhongshan Rd., Zhonghe Dist., New Taipei  
City, Taiwan, 235, R.O.C.

Operator GlacialLight R&D Department  
Telephone +886 2 2244-1227  
Fax +886 2 2244-1228  
e-Mail sales@GlacialLight.com

## GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood / LDC Data Sheet

Luminaire: GlacialLight GL-FL35-NL-WW-3000K-60D-(Natural Sunlight)-Without Lens Hood

Lamps: 1 x Flood Light

